

# Revealing Feature Spaces Underlying Similarity Judgments of Natural Scenes

Peter Brotherwood<sup>1</sup>, Andrey Barsky<sup>2</sup>, Jasper van den Bosch<sup>2</sup>, Kendrick Kay<sup>3</sup>, Ian Charest<sup>1,2</sup>

1 - cerebrUM, Département de Psychologie, Université de Montréal; 2 - CHBH, School of Psychology, University of Birmingham; 3 - CMRR, Department of Radiology, University of Minnesota



## Introduction


Elucidating the feature dimensions which form our perceptions is important in gaining insight into what drives our ability to understand the world around us. Hebart et al. (2020) developed a sparse positive similarity embeddings approach to reveal the semantic dimensions driving similarity judgements collected from an ‘odd-one-out’ stimulus triplet judgement task [1]. The triplet judgement task is limited in measuring similarity in individual participants, and the number of possible triplet combinations makes it hard to fully sample a large stimulus set.

An alternative to the triplet odd-one out task is the multiple arrangements (MA) task [2]. This task is efficient in capturing similarity judgments in individual participants with condition rich stimulus sets. Using representational similarity analysis [3], the results of the MA task can then be compared to model or brain representations. While capable of providing a fully sampled RDM, MA provides no insight into the dimensions driving these judgments.


Here we present a hybrid methodology which aims to combine the benefits of a fully sampled set of similarity judgements from MA with the deeper insights achieved by Hebart et al.

## Methods


Perceived similarity judgments were measured from eight individual participants with a set of 100 diverse, condition-rich images of natural scenes taken from the Natural Scenes Dataset [4].

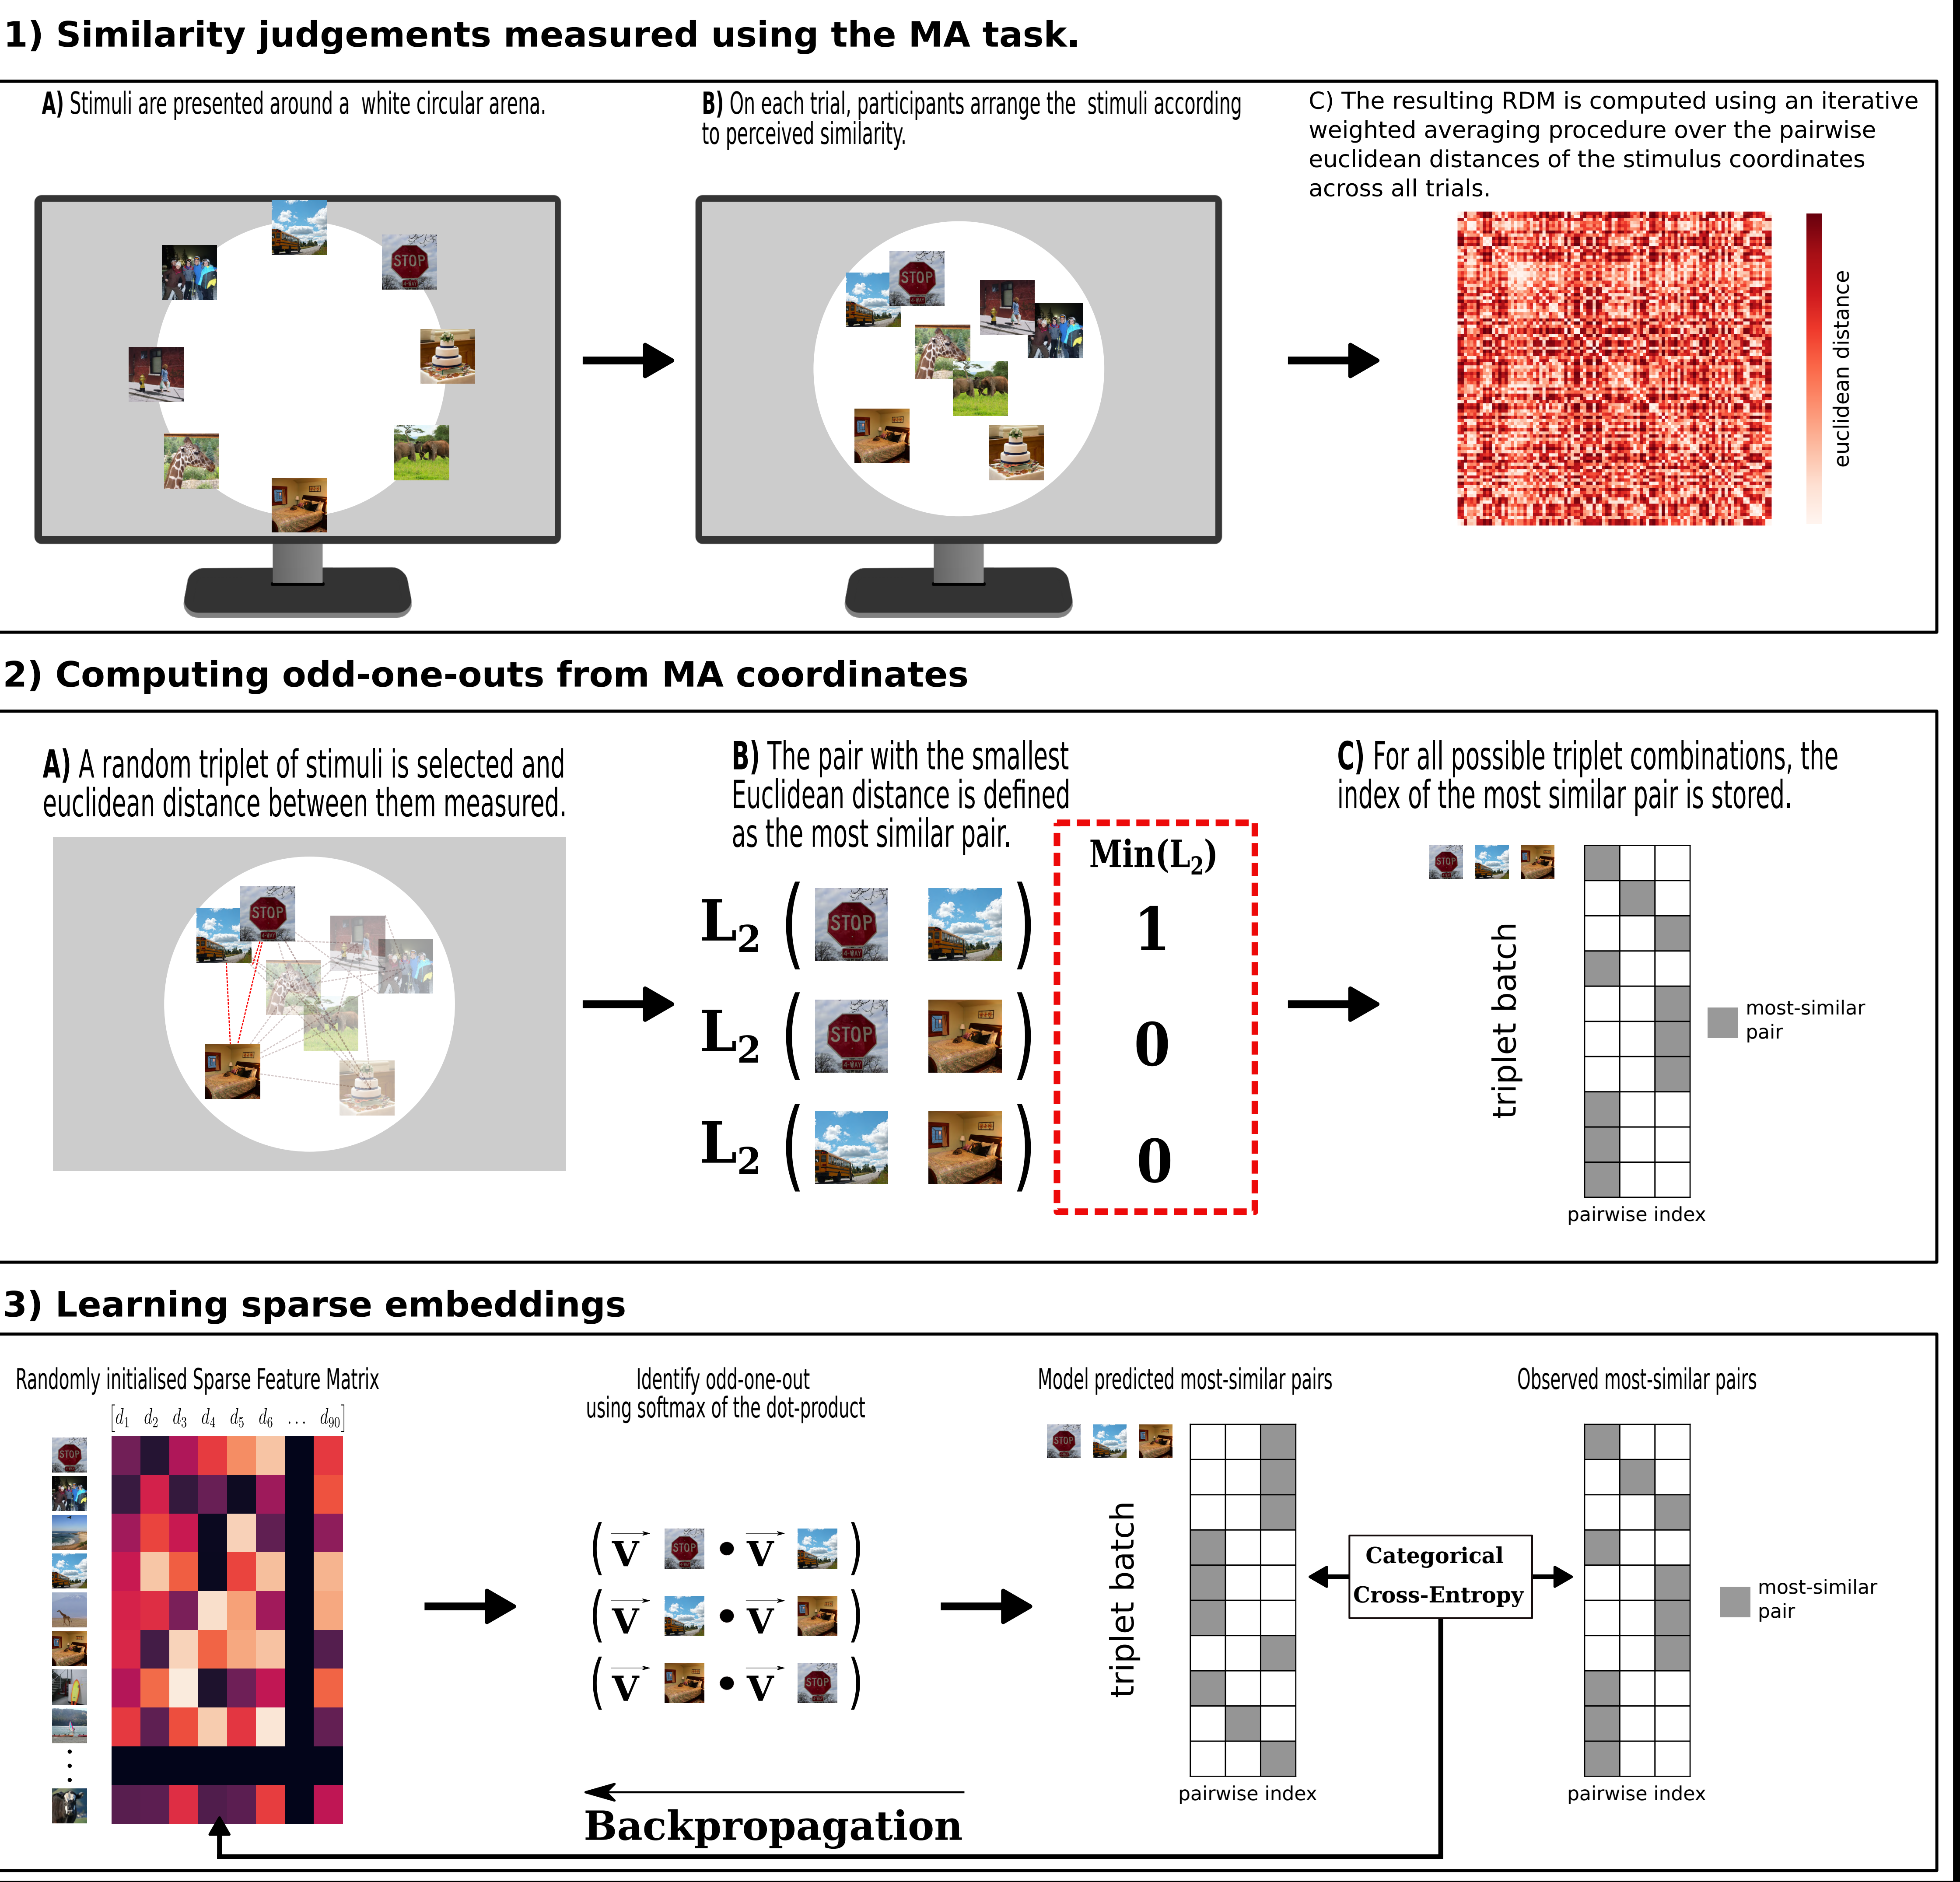

## Results

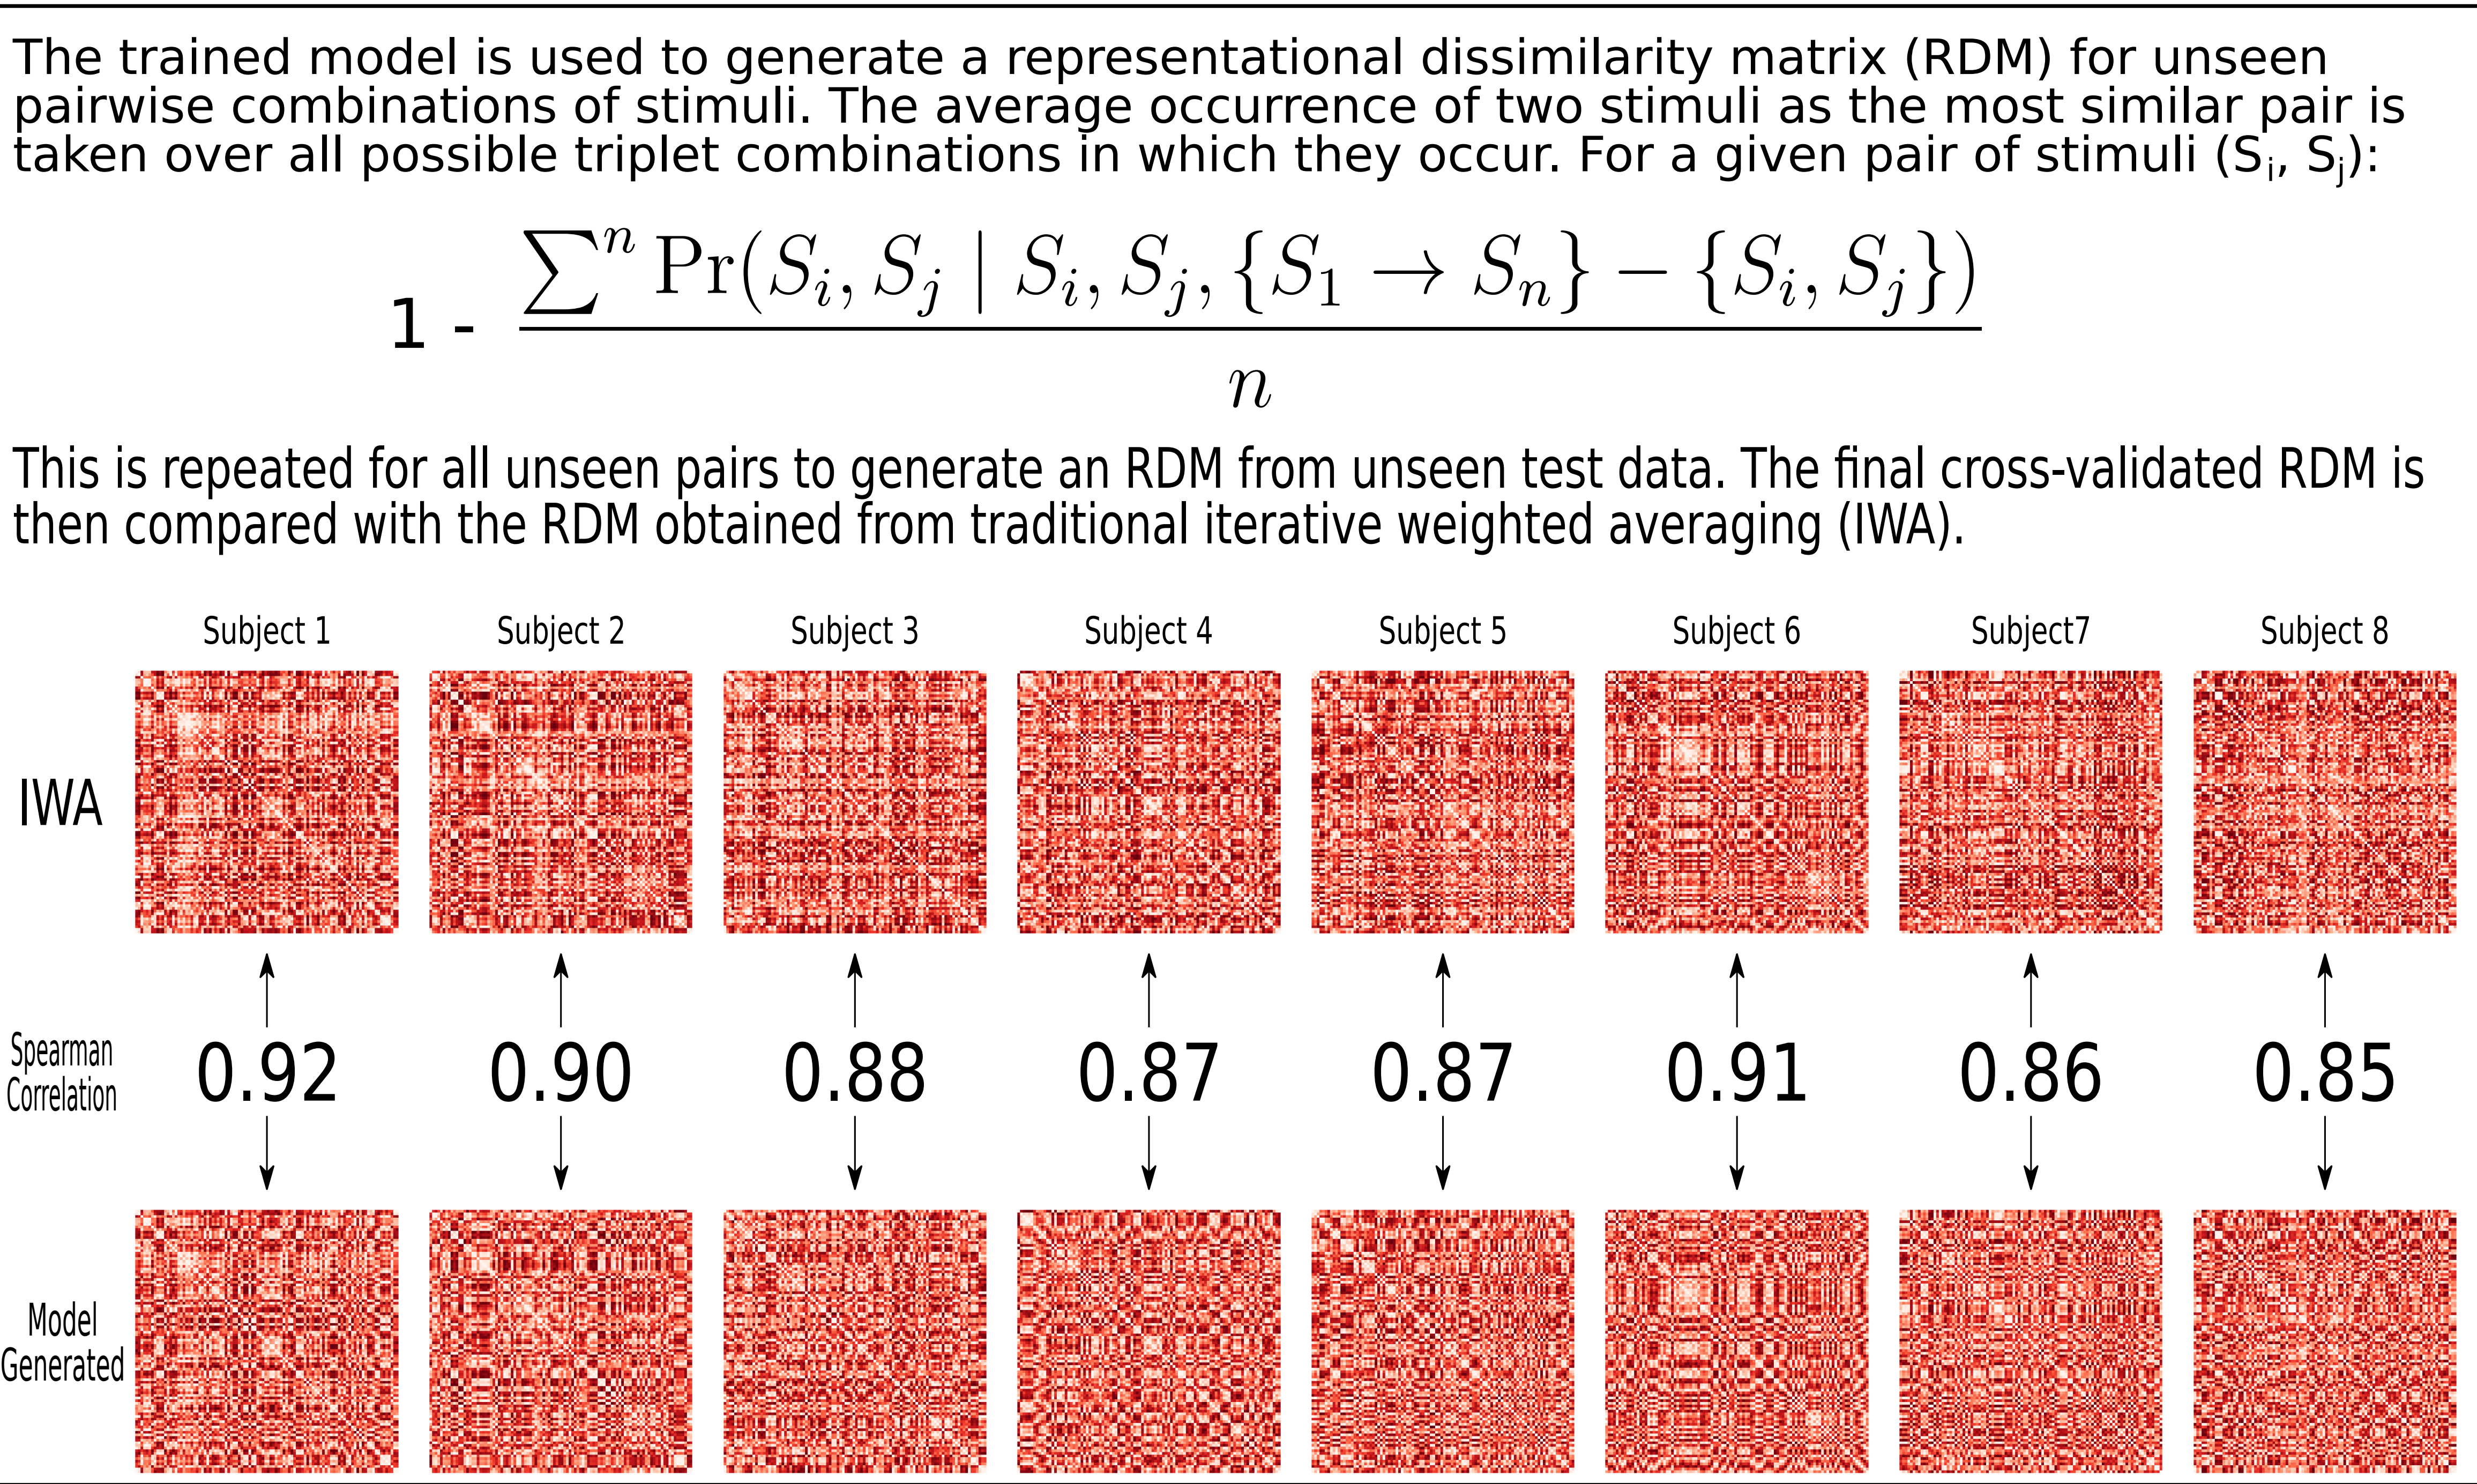

## Results

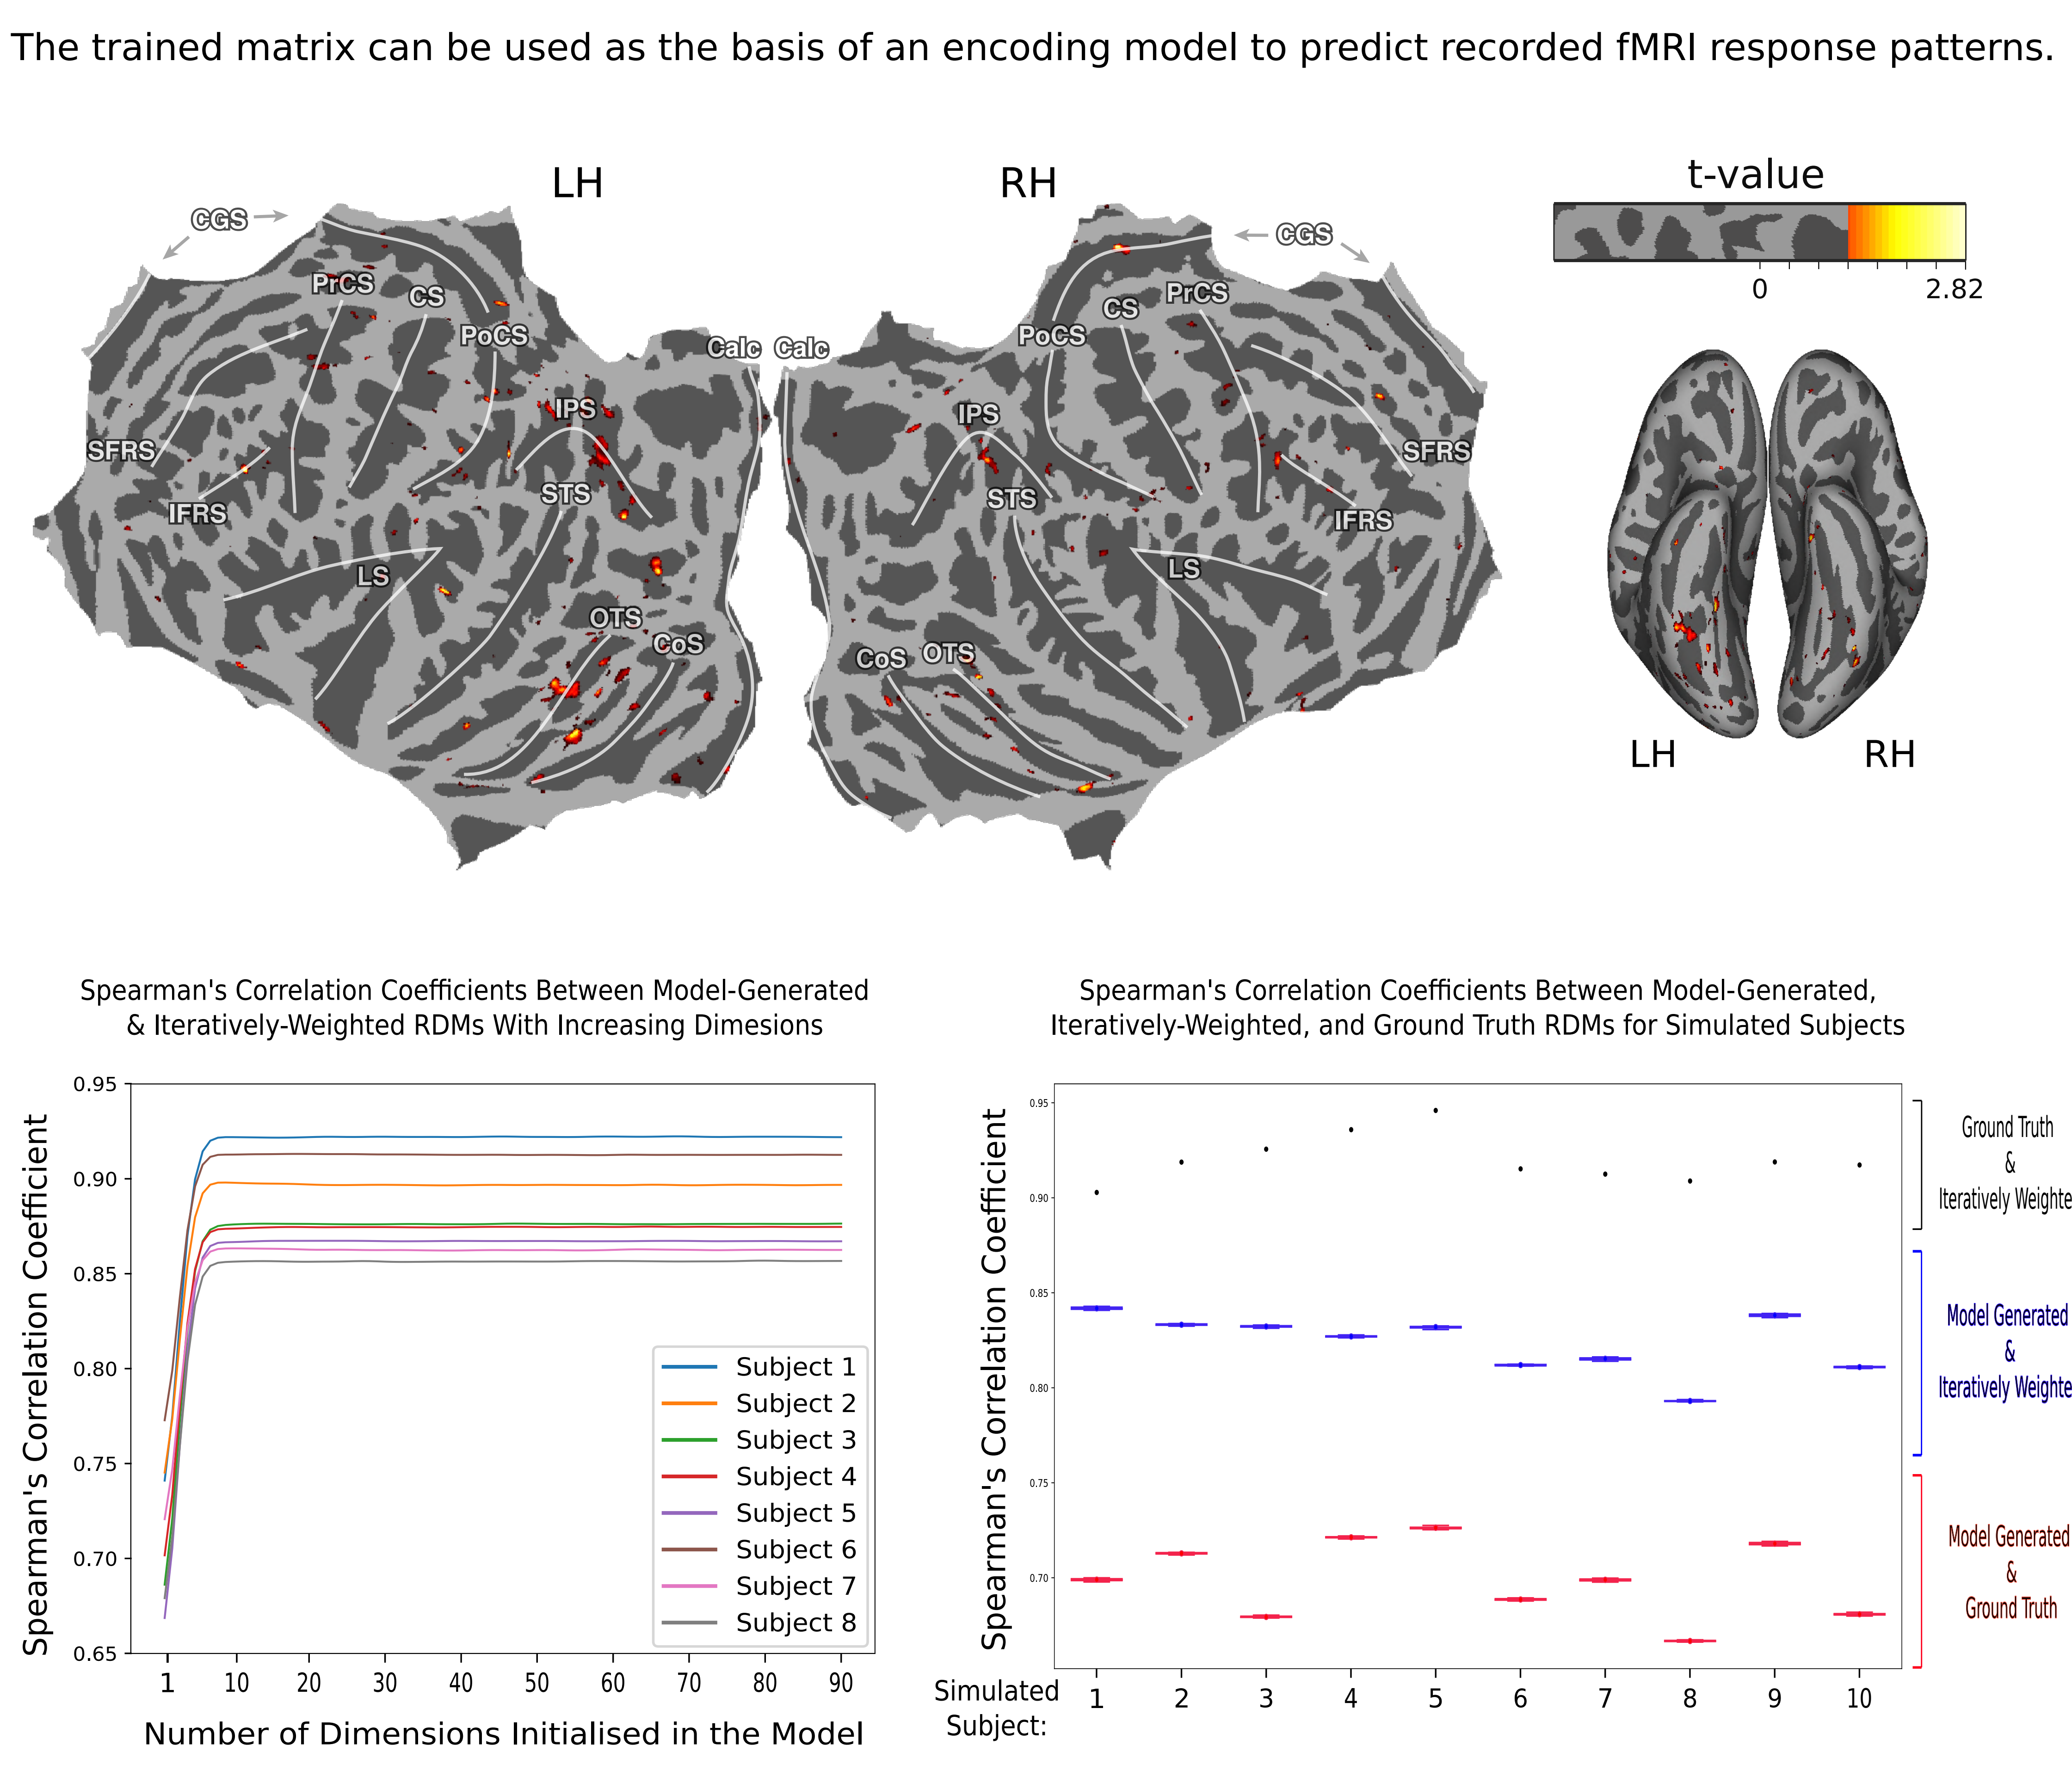

## Conclusions and Future Direction

Multiple arrangements can efficiently collect a fully sampled set of similarity judgements for a large set of stimuli. The information from MA can be used to train a model capable of accurately reconstructing unseen similarity judgements when compared with 'gold standard' IWA.

The dimensions recovered from this model provide an insight into the key semantic concepts driving the ability to identify and distinguish natural scenes in individual participants, and reveals the number of dimensions utilised in driving said judgements.

The resulting embedding can be used to predict fMRI response patterns using voxel-wise encoding modelling. Future efforts will aim to collect fully-sampled MA data for a much larger set of natural scenes to improve the activity pattern predictions.

## References

- Hebart M, Zheng C, Pereira F, Baker C. Revealing the multidimensional mental representations of natural objects underlying human similarity judgements. Nature Human Behaviour. 2020;4(11):1173-1185.
- Kriegeskorte N, Mur M. Inverse MDS: Inferring Dissimilarity Structure from Multiple Item Arrangements. Frontiers in Psychology. 2012;3.
- Kriegeskorte N. Representational similarity analysis – connecting the branches of systems neuroscience. Frontiers in Systems Neuroscience. 2008;.
- Allen E, St-Yves G, Wu Y, Breedlove J, Prince J, Dowdle L et al. A massive 7T fMRI dataset to bridge cognitive neuroscience and artificial intelligence. Nature Neuroscience. 2021;25(1):116-126.