


The image shows a VS Code editor with several Docker Compose configuration files open. The active file is `supervisord_customers.conf`, which defines two services: `uber_eats_backend` (a Django application) and `kafka_consumer` (a Python script). The terminal window shows the execution of `kubectl exec` commands to run these services on a Kubernetes cluster. The logs for the `kafka_consumer` service show it has subscribed to the `orders` topic and received two messages: one for an order with ID 3 and another for an order with ID 4.

```
1 [supervisord]
2 nodaemon=true
3
4 [program:django]
5 commandsh -c "python manage.py makemigrations && python manage.py migrate && gunicorn uber_eats_backend.wsgi:application --bind 0.0.0.0:80
6 autostart=true
7 autorestart=true
8
9 [program:kafka_consumer]
10 commandsh -c "sleep 10 && python manage.py customers_kafka_consumer"
11 autostart=true
12 autorestart=true
13 stdout_logfile=/var/log/kafka_consumer.log
14 stderr_logfile=/var/log/kafka_consumer.err
15
```

```
root@backend-deployment-f9f6b868b-mvwhn:/app# tail -f /var/log/kafka_consumer.log
Subscribed to topic: orders
{"order_id": 3, "customer_id": 1, "restaurant_id": 1, "total_price": 11.00, "items": [{"dish": "idly", "quantity": 4}]}
Received message: {"order_id": 3, "status": "preparing"}
Received message: {"order_id": 4, "status": "on_the_way"}
```

Kafka Consumer logs of **orders** topic (when order is created on user , notifying the message on restaurant side) and **order_updates** (when the order status is changed on restaurant side , notifying the message on user side)

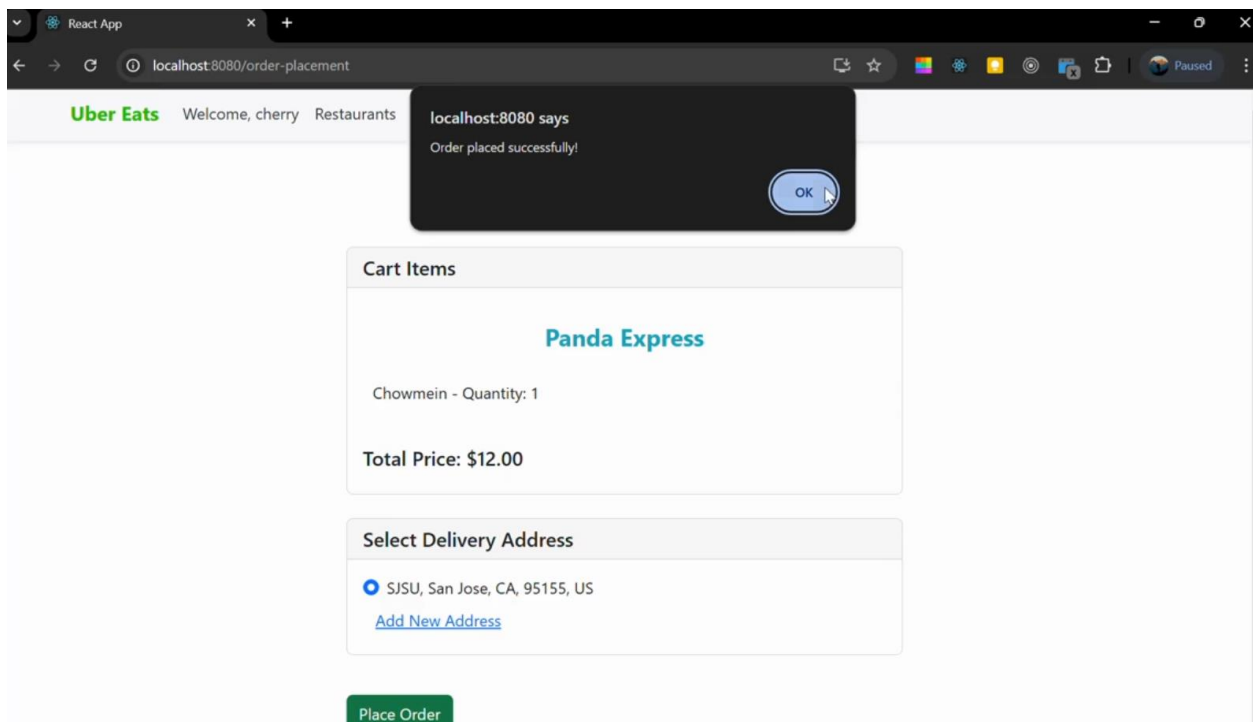

```
File Edit Selection View Go Run ... DS_Lab2_Uber_Eats
mers.conf (Untracked) U supervisord_restaurants.conf (Untracked) U customers.Dockerfile M supervisord_customers.conf U supervisord_restaurants.conf U
uber_eats_backend > supervisord_customers.conf
1 [supervisord]
2 nodaemon=true
3
4 [program:django]
5 command=sh -c "python manage.py makemigrations && python manage.py migrate && gunicorn uber_eats_backend.wsgi:application --bind 0.0.0.0:80
6 autostart=true
7 autorestart=true
8
9 [program:kafka_consumer]
10 command=sh -c "sleep 10 && python manage.py customers_kafka_consumer"
11 autostart=true
12 autorestart=true
13 stdout_logfile=/var/log/kafka_consumer.log
14 stderr_logfile=/var/log/kafka_consumer.err
15

PROBLEMS 2 OUTPUT DEBUG CONSOLE TERMINAL PORTS AZURE COMMENTS
Received message: {"order_id": 1, "customer_id": 1, "restaurant_id":
1, "total_price": 11.00, "items": [{"dish": "idly", "quantity": 1}]}
Received message: {"order_id": 2, "customer_id": 1, "restaurant_id":
1, "total_price": 44.00, "items": [{"dish": "idly", "quantity": 4}]}

Received message: {"order_id": 3, "customer_id": 1, "restaurant_id":
1, "total_price": 11.00, "items": [{"dish": "idly", "quantity": 1}]}
Received message: {"order_id": 4, "customer_id": 2, "restaurant_id":
2, "total_price": 12.00, "items": [{"dish": "Chowmein", "quantity": 1
}}}

Nikhil@DELL-PC MINGW64 ~/Documents/workspace/cherry/DS_Lab2_Uber_Eats
/kubernetes (feature-orchestration)
$ kubectl exec -it backend-deployment-f9f6b868b-mvw9n -c customers --
bash
root@backend-deployment-f9f6b868b-mvw9n/app# tail -f /var/log/kafka_
consumer.log
Subscribed to topic: order_updates
Received message: {"order_id": 3, "status": "preparing"}
```

React App

localhost:8080/restaurant/2/orders

Uber Eats Dashboard Logout

Orders Management

All

Order #4
Status: NEW

On the Way UPDATE STATUS

Name: Charishma
Email: cherry@gmail.com
Phone: 9876765676
Delivery Address: SJSU
City: San Jose
State: CA
Country: US


Status updated successfully!

The image shows a VS Code editor window with a file named `supervisord_customers.conf` open. The file contains a `[supervisord]` section with `nodaemon=true` and a `[program:django]` section with a command to run a Django application using `gunicorn`. Below this is a `[program:kafka_consumer]` section with a command to run a Kafka consumer. The terminal window shows the execution of `kubectl exec` to run a command in a pod, followed by `tail -f /var/log/kafka_consumer.log` to view the logs. The logs show several messages received by the consumer, including order updates and status changes.


```
1 [supervisord]
2 nodaemon=true
3
4 [program:django]
5 command=sh -c "python manage.py makemigrations && python manage.py migrate && gunicorn uber_eats_backend.wsgi:application --bind 0.0.0.0:80
6 autostart=true
7 autorestart=true
8
9 [program:kafka_consumer]
10 command=sh -c "sleep 10 && python manage.py customers_kafka_consumer"
11 autostart=true
12 autorestart=true
13 stdout_logfile=/var/log/kafka_consumer.log
14 stderr_logfile=/var/log/kafka_consumer.err
15
```

```
$ kubectl exec -it backend-deployment-f9f6b868b-mvwhn -c customers -- bash
root@backend-deployment-f9f6b868b-mvwhn:/app# tail -f /var/log/kafka_consumer.log
Subscribed to topic: order_updates
Received message: {"order_id": 3, "status": "preparing"}
Received message: {"order_id": 4, "status": "on_the_way"}
```

Docker Desktop containing the Kubernetes container minikube.

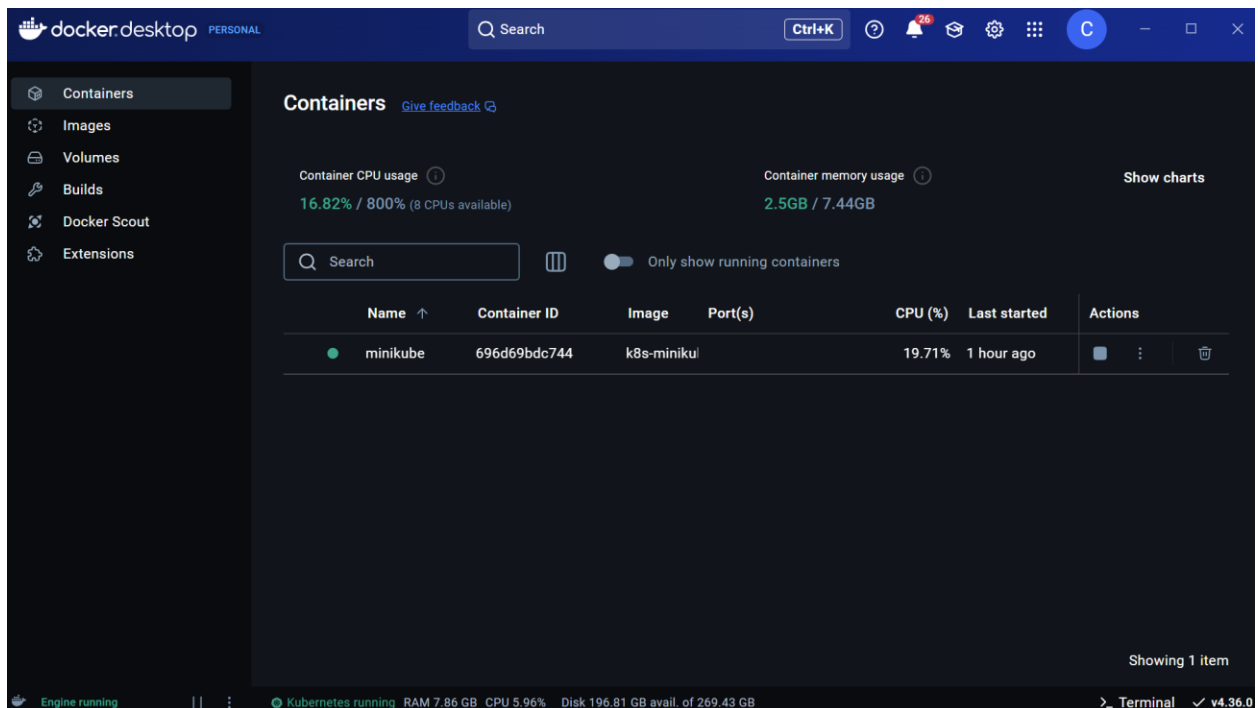

On docker hub , the docker images created for backend restaurants , customers , order , frontend and nginx.

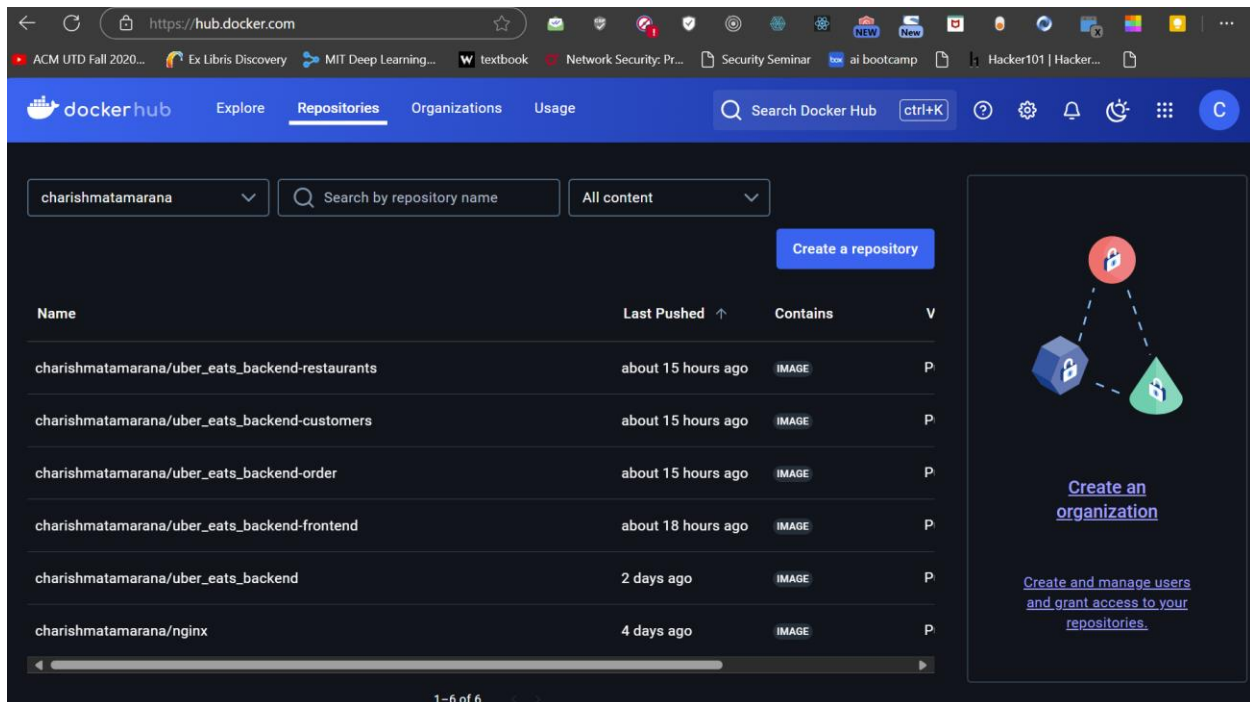

The pods and services created which are in running status

