

Exception Handling

CHAPTER 9

Slides prepared by Rose Williams, *Binghamton University*

Introduction to Exception Handling

- Sometimes the best outcome can be when nothing unusual happens
- However, the case where exceptional things happen must also be prepared for
 - Java exception handling facilities are used when the invocation of a method may cause something exceptional to occur

Introduction to Exception Handling

- Java library software (or programmer-defined code) provides a mechanism that signals when something unusual happens
 - This is called ***throwing an exception***
- In another place in the program, the programmer must provide code that deals with the exceptional case
 - This is called ***handling the exception***

try-throw-catch Mechanism

- The basic way of handling exceptions in Java consists of the *try-throw-catch* trio
- The **try** block contains the code for the basic algorithm
 - It tells what to do when everything goes smoothly
- It is called a **try** block because it "tries" to execute the case where all goes as planned
 - It can also contain code that throws an exception if something unusual happens

```
try
{
    CodeThatMayThrowAnException
}
```

The try-throw-catch Trio

```
. . . // method code
try
{
    . . .
    throw new Exception(StringArgument);
    . . .
}
catch(Exception e)
{
    String message = e.getMessage();
    System.out.println(message);
    System.exit(0);
} . . .
```

Eg. Dancelesson, Dancelesson2

throw

throw new

ExceptionClassName (PossiblySomeArguments);

- If exception is thrown, **try** block stops
 - Normally, the flow of control is transferred to another portion of code known as the **catch** block
- The value thrown is the argument to the **throw** operator, and is always an object of some exception class

throw

- A **throw** statement is similar to a method call:

```
throw new ExceptionClassName(SomeString);
```

 - In the above example, the object of class ***ExceptionClassName*** is created using a string as its argument
 - This object, which is an argument to the **throw** operator, is the exception object thrown
- Instead of calling a method, a **throw** statement calls a **catch** block

catch

- When an exception is thrown, the **catch** block begins execution
 - The **catch** block has only **one** parameter
 - The exception object thrown is plugged in for the **catch** block parameter
- The execution of the **catch** block is called *catching the exception*, or *handling the exception*; the catch block is an exception handler
 - Whenever an exception is thrown, it should ultimately be handled (or caught) by some **catch** block

catch

```
catch (Exception e)
{
    ExceptionHandlingCode
}
```

- A **catch** block looks like a method definition that has a parameter of type *Exception* class
 - It is not really a method definition

catch

```
catch(Exception e) { . . . }
```

- **e** is called the **catch block parameter**
- The **catch** block parameter does two things:
 1. It specifies the type of thrown exception object that the **catch** block can catch (e.g., an **Exception** class object above)
 2. It provides a name (for the thrown object that is caught) on which it can operate in the **catch** block
 - Note: The identifier **e** is often used by convention, but any non-keyword identifier can be used

try-throw-catch Mechanism

- When a **try** block is executed, two things can happen:
 1. No exception is thrown in the **try** block
 - The code in the **try** block is executed to the end of the block
 - The **catch** block is skipped
 - The execution continues with the code placed after the **catch** block

try-throw-catch Mechanism

2. An exception is thrown in the **try** block and caught in the **catch** block
 - The rest of the code in the **try** block is skipped
 - Control is transferred to a following **catch** block (in simple cases)
 - The thrown object is plugged in for the **catch** block parameter
 - The code in the **catch** block is executed
 - The code that follows that **catch** block is executed (if any)

Using the getMessage Method

```
. . . // method code
try
{
    . . .
    throw new Exception(StringArgument);
    . . .
}
catch (Exception e)
{
    String message = e.getMessage();
    System.out.println(message);
    System.exit(0);
} . . .
```

Using the `getMessage` Method

- Every exception has a `String` instance variable that contains some message
 - This string typically identifies the reason for the exception
- In the previous example, `StringArgument` is an argument to the `Exception` constructor
- This is the string used for the value of the string instance variable of exception `e`
 - Therefore, the method call `e.getMessage()` returns this string

Exception Classes

- There are more exception classes than just the single class **Exception**
 - There are more exception classes in the standard Java libraries
 - New exception classes can be defined like any other class
- All predefined exception classes have the following properties:
 - There is a constructor that takes a single argument of type **String**
 - The class has an accessor method **getMessage** that can recover the string given as an argument to the constructor when the exception object was created
- All programmer-defined classes must be derived from the class **Exception**

Exception Classes from Standard Packages

- The predefined exception class **Exception** is the root class for all exceptions
 - Every exception class is a descendent class of the class **Exception**
 - Although the **Exception** class can be used directly in a class or program, it is most often used to define a derived class
 - The class **Exception** is in the **java.lang** package, and so requires no **import** statement

Exception Classes from Standard Packages

- Numerous predefined exception classes are included in the standard packages that come with Java

- For example:

- `IOException`

- `NoSuchMethodException`

- `FileNotFoundException`

- Many exception classes must be imported in order to use them

- `import java.io.IOException;`

Defining Exception Classes

- A **throw** statement can throw an exception object of any exception class
- Instead of using a predefined class, exception classes can be programmer-defined
 - These can be tailored to carry the precise kinds of information needed in the **catch** block
 - A different type of exception can be defined to identify each different exceptional situation

Defining Exception Classes

- Every exception class to be defined must be a derived class of some already defined exception class
 - It can be a derived class of any exception class in the standard Java libraries, or of any programmer defined exception class
- Constructors are the most important members to define in an exception class
 - They must behave appropriately with respect to the variables and methods inherited from the base class
 - Often, there are no other members, except those inherited from the base class
- The following exception class performs these basic tasks only

A Programmer-Defined Exception Class

Display 9.3 A Programmer-Defined Exception Class

```
1 public class DivisionByZeroException extends Exception
2 {
3     public DivisionByZeroException()           You can do more in an exception
4     {                                           constructor, but this form is common.
5         super("Division by Zero!");
6     }

7     public DivisionByZeroException(String message)
8     {
9         super(message);           super is an invocation of the constructor for
10    }                             the base class Exception.
11 }
```

Eg. DivisionDemoFirstVersion.java

Tip: An Exception Class Can Carry a Message of Any Type: int Message

- An exception class constructor can be defined that takes an argument of another type
 - It would store its value in an instance variable
 - It would need to define accessor methods for this instance variable

An Exception Class with an `int` Message

Display 9.5 An Exception Class with an `int` Message

```
1  public class BadNumberException extends Exception
2  {
3      private int badNumber;

4      public BadNumberException(int number)
5      {
6          super("BadNumberException");
7          badNumber = number;
8      }

9      public BadNumberException()
10     {
11         super("BadNumberException");
12     }

13     public BadNumberException(String message)
14     {
15         super(message);
16     }

17     public int getBadNumber()
18     {
19         return badNumber;
20     }
21 }
```

Eg. `BadNumberExceptionDemo.java`

Exception Object Characteristics

- The two most important things about an exception object are its **type** (i.e., exception class) and the **message** it carries
 - The message is sent along with the exception object as an instance variable
 - This message can be recovered with the accessor method **getMessage**, so that the catch block can use the message

Programmer-Defined Exception Class Guidelines

- Must be a derived class of an already existing exception class
- At least two constructors should be defined, sometimes more
- The exception class should allow for the fact that the method **getMessage** is inherited

Preserve getMessage

- For all predefined exception classes, **getMessage** returns the string that is passed to its constructor as an argument
 - Or it will return a default string if no argument is used with the constructor
- This behavior must be preserved in all programmer-defined exception class, two constructors must be included:
 - A constructor that takes a string argument and begins with a call to **super**, which takes the string argument
 - A no-argument constructor that includes a call to **super** with a default string as the argument

Multiple catch Blocks

- A **try** block can potentially throw any number of exception values, and they can be of differing types
 - In any one execution of a **try** block, at most one exception can be thrown (since a throw statement ends the execution of the **try** block)
 - However, different types of exception values can be thrown on different executions of the **try** block

Multiple `catch` Blocks

- Each `catch` block can only catch values of the exception class type given in the `catch` block heading
- Different types of exceptions can be caught by placing more than one `catch` block after a `try` block
 - Any number of `catch` blocks can be included, but they must be placed in the correct order

r1

Example

rui, 10/09/2007

Pitfall: Catch the More Specific Exception First

- When catching multiple exceptions, the order of the **catch** blocks is important
 - When an exception is thrown in a **try** block, the **catch** blocks are examined in order
 - The first one that matches the type of the exception thrown is the one that is executed

Pitfall: Catch the More Specific Exception First

```
catch (Exception e)
{ . . . }
catch (NegativeNumberException e)
{ . . . }
```

- Because a **NegativeNumberException** is a type of **Exception**, all **NegativeNumberExceptions** will be caught by the first **catch** block before ever reaching the second block
 - The catch block for **NegativeNumberException** will never be used!
- For the correct ordering, simply reverse the two blocks

Throwing an Exception in a Method

- Sometimes it makes sense to throw an exception in a method, but not catch it in the same method
 - Some programs that use a method should just end if an exception is thrown, and other programs should do something else
 - In such cases, the program using the method should enclose the method invocation in a **try** block, and catch the exception in a **catch** block that follows
- In this case, the method itself would not include **try** and **catch** blocks
 - However, it would have to include a **throws** clause

Declaring Exceptions in a **throws** Clause

- If a method can throw an exception but does not catch it, it must provide a warning in the heading
 - This warning is called a **throws clause**
 - The process of including an exception class in a throws clause is called *declaring the exception*
throws *AnException* //throws clause
 - The following states that an invocation of **aMethod** could throw **AnException**
public void aMethod() throws AnException
- If a method throws an exception and does not catch it, then the method invocation ends immediately

Declaring Multiple Exceptions in a **throws** Clause

- If a method can throw more than one type of exception, then separate the exception types by commas

```
public void aMethod() throws  
    AnException, AnotherException
```

Defining Exceptions in a Method

- Here is an example of a method from which the exception originates:

```
public void someMethod()  
    throws SomeException  
{  
    . . .  
    throw new  
        SomeException (SomeArgument) ;  
    . . .  
}
```

Handling Exceptions in another Method

- When `someMethod` is used by an `otherMethod`, the `otherMethod` must then deal with the exception:

```
public void otherMethod()  
{  
    try  
    {  
        someMethod();  
        . . .  
    }  
    catch (SomeException e)  
    {  
        CodeToHandleException  
    }  
    . . .  
}
```

Eg. `DivisionDemoSecondVersion.java`

The Catch or Declare Rule: Two ways

- Two ways of handling exceptions thrown in a method:
 1. The code that can throw an exception is placed within a **try** block, and the possible exception is caught in a **catch** block within the same method
 2. The possible exception can be declared at the start of the method definition by placing the exception class name in a **throws** clause

The Catch or Declare Rule: An Exception must be handled somewhere

- The first technique handles an exception in a **catch** block
- The second technique is a way to shift the exception handling responsibility to the method that invoked the exception throwing method
- The invoking method must handle the exception, unless it too uses the same technique to "pass the buck"
- Ultimately, every exception that is thrown should eventually be caught by a **catch** block in some method that does not just declare the exception class in a **throws** clause


The Catch or Declare Rule: Mixed usage

- Two techniques can be **mixed**
 - Some exceptions may be caught, and others may be declared in a **throws** clause
- However, these techniques must be used consistently with a given exception
 - If an exception is not declared, then it must be handled within the method
 - If an exception is declared, then the responsibility for handling it is shifted to some other calling method
 - Note that if a method definition encloses an invocation of a second method, and the second method can throw an exception and does not catch it, then the first method must catch or declare it

Hierarchy of Throwable Objects

Display 9.10 Hierarchy of Throwable Objects

All descendents of the class Throwable can be thrown and caught in a catch block.

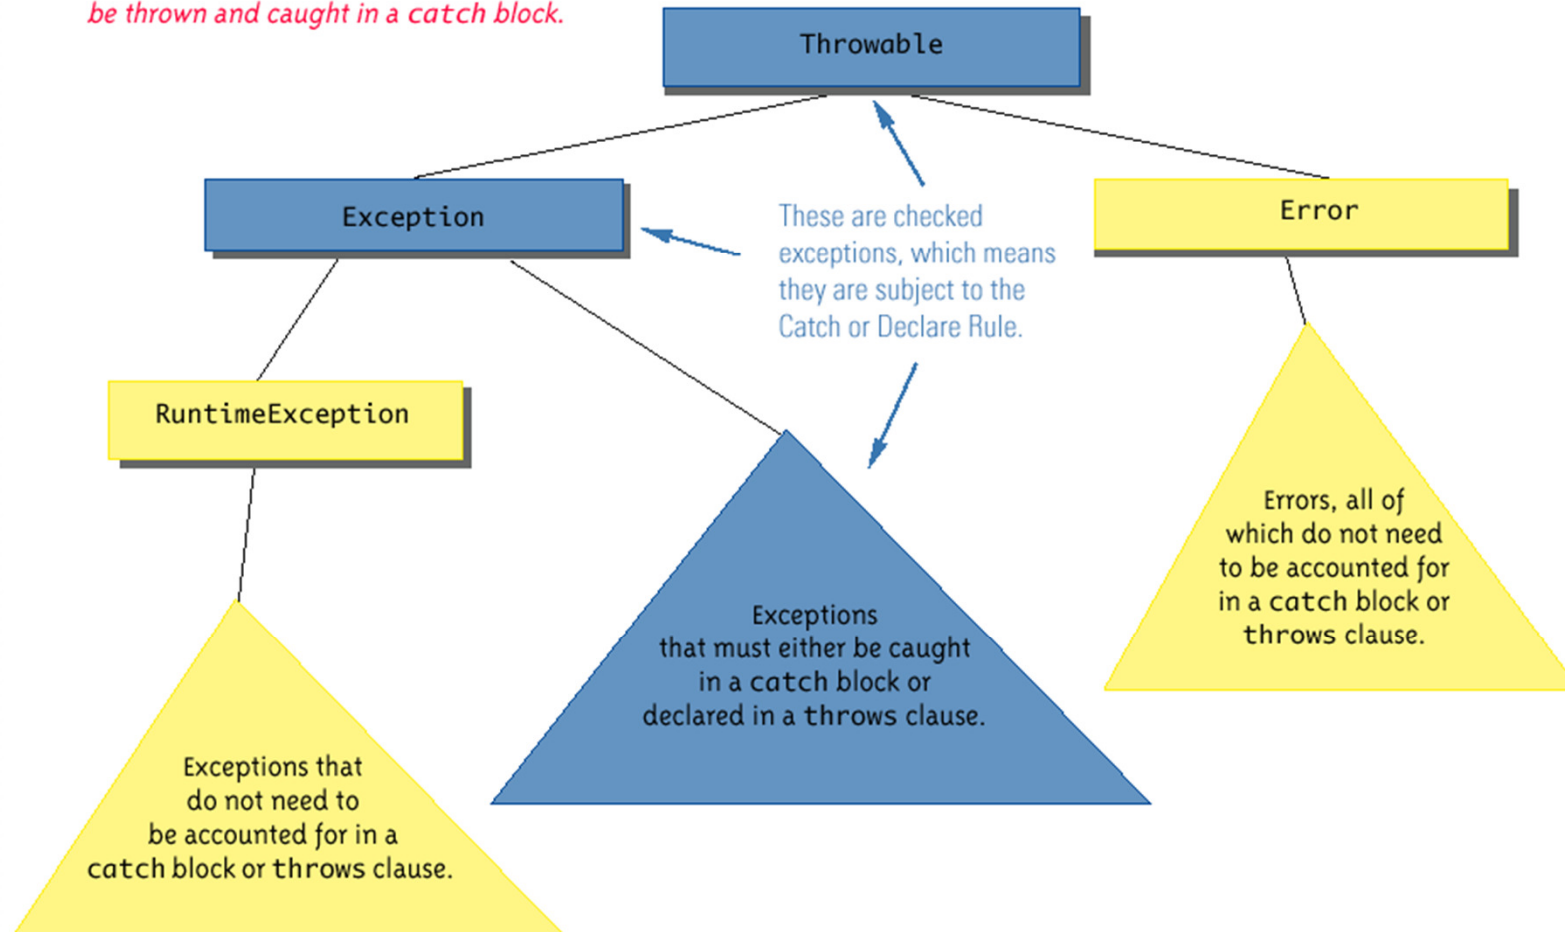

Checked and Unchecked Exceptions

- Exceptions that are subject to the catch or declare rule are called *checked* exceptions
 - The compiler checks to see if they are accounted for with either a catch block or a throws clause
 - The classes **Throwable**, **Exception**, and all descendants of the class **Exception** are checked exceptions
- All other exceptions are *unchecked* exceptions -- **must be corrected.**
- The class **Error** and all its descendant classes are called *error classes*
 - Error classes are *not* subject to the Catch or Declare Rule

The **throws** Clause in Derived Classes

- When a method in a derived class is overridden, it should have the same exception classes listed in its **throws** clause that it had in the base class
 - Or it should have a subset of them
- A derived class may not add any exceptions to the **throws** clause
 - But it can delete some

What Happens If an Exception is Never Caught?

- If every method up to and including the main method simply includes a **throws** clause for an exception, that exception may be thrown but never caught
 - In a GUI program (i.e., a program with a windowing interface), nothing happens - but the user may be left in an unexplained situation, and the program may be no longer be reliable
 - In non-GUI programs, this causes the program to terminate with an error message giving the name of the exception class
- Every well-written program should eventually catch every exception by a **catch** block in some method

When to Use Exceptions

- Exceptions should be reserved for situations where a method encounters *an unusual or unexpected case that cannot be handled easily in some other way*
- How exceptions are handled depends on how a method is called.

Event Driven Programming

- Exception handling is an example of a programming methodology known as *event-driven programming*
- When using event-driven programming, objects are defined so that they send events to other objects that handle the events
 - An event is an object also
 - Sending an event is called *firing an event*

Event Driven Programming

- In exception handling, the event objects are the exception objects
 - They are fired (thrown) by an object when the object invokes a method that throws the exception
 - An exception event is sent to a **catch** block, where it is handled

Pitfall: Nested `try-catch` Blocks

(Non-examinable)

- It is possible to place a `try` block and its following catch blocks inside a larger `try` block, or inside a larger `catch` block
 - If a set of `try-catch` blocks are placed inside a larger `catch` block, **different names** must be used for the `catch` block parameters in the inner and outer blocks, just like any other set of nested blocks
 - If a set of `try-catch` blocks are placed inside a larger `try` block, and an exception is thrown in the **inner try** block that is **not caught**, then the exception is thrown to the **outer try** block for processing, and may be caught in one of its `catch` blocks

The `finally` Block

- The `finally` block contains code to be executed whether or not an exception is thrown in a `try` block
 - If it is used, a `finally` block is placed after a `try` block and its following `catch` blocks

```
try
{ . . . }
catch (ExceptionClass1 e)
{ . . . }
. . .
catch (ExceptionClassN e)
{ . . . }
finally
{
    CodeToBeExecutedInAllCases
}
```

The `finally` Block

- If the `try-catch-finally` blocks are inside a method definition, there are three possibilities when the code is run:
 1. The `try` block runs to the end, no exception is thrown, and the `finally` block is executed
 2. An exception is thrown in the `try` block, caught in one of the `catch` blocks, and the `finally` block is executed
 3. An exception is thrown in the `try` block, there is no matching `catch` block in the method, the `finally` block is executed, and then the method invocation ends and the exception object is thrown to the enclosing method

The **AssertionError** Class

- When a program contains an assertion check, and the assertion check fails, an object of the class **AssertionError** is thrown
 - This causes the program to end with an error message
- The class **AssertionError** is derived from the class **Error**, and therefore is an unchecked Throwable
 - In order to prevent the program from ending, it could be handled, but this is not required

Exception Handling with the **Scanner** Class

- The **nextInt** method of the **Scanner** class can be used to read **int** values from the keyboard
- However, if a user enters something other than a well-formed **int** value, an **InputMismatchException** will be thrown
 - Unless this exception is caught, the program will end with an error message
 - If the exception is caught, the **catch** block can give code for some alternative action, such as asking the user to reenter the input

The `InputMismatchException`

- The `InputMismatchException` is in the standard Java package `java.util`
 - A program that refers to it must use an `import` statement, such as the following:

```
import java.util.InputMismatchException;
```
- It is a descendent class of `RuntimeException`
 - Therefore, it is an unchecked exception and does not have to be caught in a `catch` block or declared in a `throws` clause
 - However, catching it in a `catch` block is allowed, and can sometimes be useful

Tip: Exception Controlled Loops

- Sometimes it is better to simply loop through an action again when an exception is thrown, as follows:

```
boolean done = false;
while (! done)
{
    try
    {
        CodeThatMayThrowAnException
        done = true;
    }
    catch (SomeExceptionClass e)
    {
        SomeMoreCode
    }
}
```

An Exception Controlled Loop (Part 1 of 3)

Display 9.11 An Exception Controlled Loop

```
1 import java.util.Scanner;
2 import java.util.InputMismatchException;

3 public class InputMismatchExceptionDemo
4 {
5     public static void main(String[] args)
6     {
7         Scanner keyboard = new Scanner(System.in);
8         int number = 0; //to keep compiler happy
9         boolean done = false;
```


(continued)

An Exception Controlled Loop (Part 2 of 3)

Display 9.11 An Exception Controlled Loop

```
10     while (! done)
11     {
12         try
13         {
14             System.out.println("Enter a whole number:");
15             number = keyboard.nextInt();
16             done = true;
17         }
18         catch(InputMismatchException e)
19         {
20             keyboard.nextLine();
21             System.out.println("Not a correctly written whole number.");
22             System.out.println("Try again.");
23         }
24     }
25     System.out.println("You entered " + number);
26 }
27 }
```

If nextInt throws an exception, the try block ends and so the boolean variable done is not set to true.

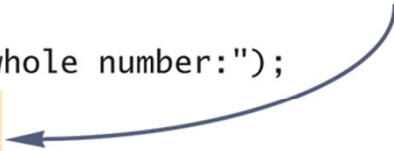

(continued)

An Exception Controlled Loop (Part 3 of 3)

Display 9.11 An Exception Controlled Loop

SAMPLE DIALOGUE

Enter a whole number:

forty two

Not a correctly written whole number.

Try again.

Enter a whole number:

fortytwo

Not a correctly written whole number.

Try again.

Enter a whole number:

42

You entered 42

ArrayIndexOutOfBoundsException

- An **ArrayIndexOutOfBoundsException** is thrown whenever a program attempts to use an array index that is out of bounds
 - This normally causes the program to end
- Like all other descendents of the class **RuntimeException**, it is an unchecked exception
 - There is no requirement to handle it
- When this exception is thrown, it is an indication that the program contains an error
 - Instead of attempting to handle the exception, the program should simply be fixed