

Charlie Crisp

# Building a Blockchain Library for OCaml

Computer Science Tripos – Part II

Pembroke College

May 1, 2018



# Proforma

Name: **Charlie Crisp**  
College: **Pembroke College**  
Project Title: **Building a Blockchain Library for OCaml**  
Examination: **Computer Science Tripos – Part II, July 2018**  
Word Count: **????<sup>1</sup>**  
Project Originator: **KC Sivaramakrishnan**  
Supervisor: **KC Sivaramakrishnan**

## Original Aims of the Project

To build a library in OCaml, which can be used as a building block for blockchain applications. The library should allow participating nodes to own a shared copy of a blockchain data structure, agreed upon by all participating nodes. Nodes should also be able to commit transactions to the blockchain, which should then be visible to other participating nodes.

## Work Completed

All that has been completed appears in this dissertation.

## Special Difficulties

None

## Declaration

I, Charlie Crisp of Pembroke College, being a candidate for Part II of the Computer Science Tripos, hereby declare that this dissertation and the work described in it are my own work, unaided except as may be specified below, and that the dissertation does not contain material that has already been used to any substantial extent for a comparable purpose.

Signed

Date

# Contents

<b>1</b>	<b>Introduction</b>	<b>9</b>
1.1	The History of the Blockchain . . . . .	9
1.2	Blockchain Today . . . . .	10
1.3	Work Completed . . . . .	10
<b>2</b>	<b>Preparation</b>	<b>13</b>
2.1	Starting Point . . . . .	13
2.2	Using OCaml . . . . .	13
2.3	Requirements Analysis . . . . .	17
2.3.1	Data Structure . . . . .	17
2.3.2	Consensus . . . . .	19
<b>3</b>	<b>Implementation</b>	<b>21</b>
3.1	System Architecture . . . . .	21
3.2	The Blockchain Data Structure . . . . .	22
3.2.1	Irmin . . . . .	22
3.2.2	Ezirmin . . . . .	24
3.3	Achieving Consensus . . . . .	27
3.3.1	Existing Consensus Algorithms . . . . .	27
3.3.2	Roles in a Logan's Approach . . . . .	29
3.3.3	Retrieving Updates from Mempools . . . . .	31
3.4	Tolerating Leader Failure . . . . .	35
<b>4</b>	<b>Evaluation</b>	<b>39</b>
4.1	Performance with a Local Participant . . . . .	40
4.1.1	Latency . . . . .	40
4.1.2	Throughput . . . . .	41
4.2	Performance with Single Remote Participant . . . . .	41
4.2.1	Latency . . . . .	41
4.2.2	Using Pure Git . . . . .	43
4.2.3	Throughput . . . . .	45
4.2.4	Achieving Constant Time Latencies . . . . .	46
4.3	Performance with Multiple Remote Participants . . . . .	47
4.3.1	Latency . . . . .	47
4.3.2	Throughput . . . . .	48

4.4	Performance with Leader Replication . . . . .	49
<b>5</b>	<b>Conclusion</b>	<b>51</b>
5.1	Successes . . . . .	51
5.2	Possible Further Work . . . . .	51
5.2.1	Improved Synchronisation Protocol . . . . .	51
5.2.2	Failure Tolerance and Changing Leaders . . . . .	51
5.2.3	Adding Participants Dynamically . . . . .	52
	<b>Bibliography</b>	<b>54</b>
<b>A</b>	<b>Project Proposal</b>	<b>55</b>

# List of Figures

1.1	A typical blockchain structure . . . . .	10
3.1	Logan system architecture overview . . . . .	22
3.2	Architecture of an Irmin store . . . . .	23
3.3	Merging Ezirmin logs . . . . .	26
3.4	Retrieving updates from a single participant mempool . . . . .	32
3.5	Missing mempool updates with a naïve consensus mechanism . . . . .	33
3.6	Buffering updates in a complex consensus mechanism . . . . .	34
3.7	Blockchain data structure with cache for pushing to replicas . . . . .	37
4.1	Latency variation with blockchain size on a local participant . . . . .	40
4.2	Latency variation with throughput on a single local participant . . . . .	41
4.3	Logan latencies with increasing blockchain size . . . . .	42
4.4	Delays incurred by leader for every poll cycle. Throughput is constant at 10tps . . . . .	43
4.5	Logan latencies using pure Git instead of OCaml’s implementation . . . . .	44
4.6	Delays incurred by leader when using pure Git. Throughput is constant at 10tps . . . . .	44
4.7	Observed throughput plateau with increasing applied throughput . . . . .	45
4.8	Latency variations against blockchain size with two remote participants using pure Git . . . . .	47
4.9	Latency variations against blockchain size with two remote participants using pure Git . . . . .	48
4.10	Time taken between transactions being added to cache branch and being merged to main blockchain branch, for a single remote replica . . . . .	49

## Acknowledgements

I would like to thank KC Sivaramakrishnan for being an extremely helpful supervisor throughout the duration of the dissertation, as well as over the past three years.

I would also like to thank Anil Madhavapeddy for allowing me to use his laptop for the duration of the dissertation, and being a very supportive DoS.

Finally I would like to thank my friends and family for supporting me through my final year.



# Chapter 1

## Introduction

Blockchain technology has existed for a long time, but the definition of ‘blockchain’ has changed drastically since its conception. Previously used just to describe a data structure, the term ‘blockchain’ is now widely used to also describe the accompanying consensus mechanisms. This is mainly due to the increasing popularity of cryptocurrencies such as Bitcoin [13] which use the ‘Proof of Work’ algorithm to solve the double spending problem. Blockchain is undoubtedly the most important technology in the field of cryptocurrencies where no single client can be trusted, however, it also has many use cases outside this sector. For instance, blockchain can be used in situations where clients *can* be trusted, such as a hospital maintaining internal medical records, or a bank wishing to record transactions from many of its own distributed clients.

In this report I present ‘Logan’, a blockchain library that I have built in OCaml which allows the easy creation of blockchain applications. The blockchain is synchronised via a leader-based consensus mechanism with strict consistency. Logan also provides the ability to ensure passive replication such that in the event of a leader failure, the leader’s state at the point of failure can be recovered. Developers using this library are also able to define custom validation of transactions being added to the blockchain. Because the application is written in OCaml, it can be compiled to bytecode, unikernels or even javascript and is therefore suitable for a wide range of destination applications and devices.

### 1.1 The History of the Blockchain

The blockchain, in its simplest form, is a series of blocks of data, where each block contains the hash of the content of the previous block. Figure 1.1 is a graphical representation of a typical blockchain data structure with a ‘genesis block’ and different chains branching from it.

The blockchain, as a cryptographically secure chain of blocks, was first conceptualised by Stuart Haber and W. Scott Stornetta in 1990 [10]. However, the most significant uses of the technology did not come until the creation of Git [16] in 2005, and the invention of Bitcoin [13] in 2008. Bitcoin uses the Proof of Work consensus algorithm to create a

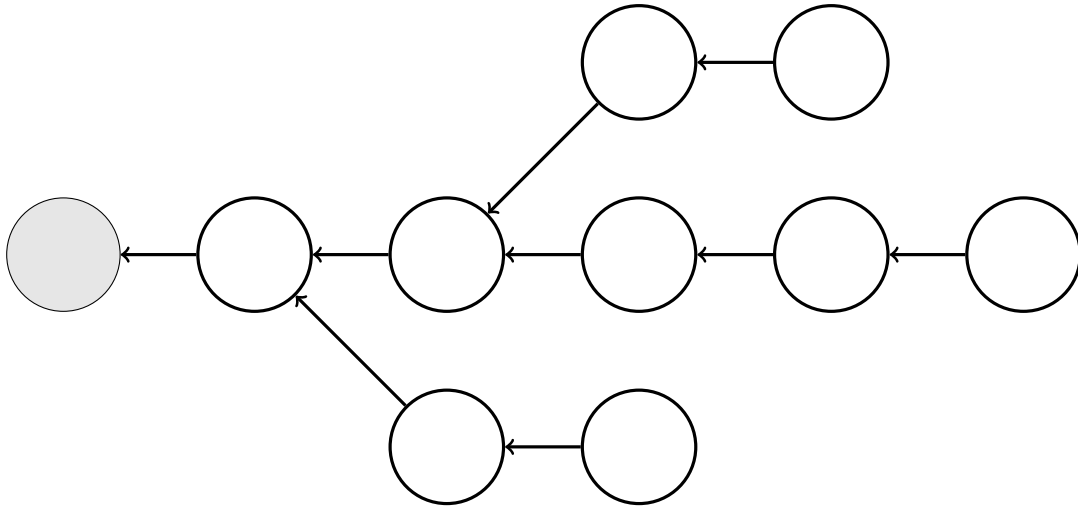


Figure 1.1: A typical blockchain structure

decentralised, trust-less, peer to peer network which is used to make transactions between virtual wallets.

## 1.2 Blockchain Today

At the time of writing, cryptocurrencies are generating both a huge amount of excitement and cynicism in popular media. Aside from Bitcoin, cryptocurrencies like Ethereum [2] have introduced the concept of Smart Contracts which allow the execution of code on the blockchain. Whilst it is possible to think of applications for blockchain technology in almost every sector, the development of applications outside the scope of cryptocurrencies has been limited. If one considers the example of OCaml, there are currently no libraries which allow a user to easily get started with building blockchain applications.

### 1.3 Work Completed

I have created Logan, a library that allows developers to create blockchain applications with the ease of importing a library. Logan was designed to exist outside the realm of cryptocurrencies and therefore assumes that all participants are trustworthy. Consensus is achieved by using a simple leader-based mechanism where the leader will periodically pull updates from participants and add them to a central blockchain. This blockchain can be viewed by all participants, with the guarantee of strict consistency. The system is also capable of running passive replication so that in the case of leader failure, the state of the leader at the point of failure can be manually recovered. To use Logan, all that a developer needs to specify is the location of the leader, participants and replicas, and to specify, if necessary, how the leader should perform validation.

I have evaluated Logan's performance by observing how the throughput that the system achieves varies with applied throughput, and by measuring how the latencies change as the blockchain size increases. My results showed that Logan is capable of dealing with throughputs and latencies which are much better than those achieved by Bitcoin. I have also shown that for a network with remote participants, the latency of adding transactions increases linearly with blockchain size. However, I have been able to attribute this to the implementation of Git that Irmin/Ezirmir uses to pull updates over the network. I have also shown that pure Git achieves a much better efficiency and that a better OCaml implementation of this protocol would allow Logan to achieve constant transaction latency with blockchain size. Finally, I have shown that participant and replica nodes can be added to a Logan network with only a modest increase in transaction latencies.



# Chapter 2

## Preparation

Before starting work on the project code, I completed a lot of preparation in order to aid the development process. I spent some time learning to use OCaml and familiarising myself with its features. This was important because it allowed me to write idiomatic code which was not only powerful, but could also provide an intuitive API for other developers to use. I also spent some time investigating a few key libraries, such as Irmin and Lwt. Understanding these libraries, the data structures they provide, and the technologies they present, allowed me to focus on the technological challenges in the project and not waste time reinventing the wheel. Setting up a good development environment allowed me to run automated builds and, therefore, catch any errors in the code early. This was particularly useful during the evaluation as it involved installing the project on many remote machines. Being able to catch issues like dependency resolution or out of date build commands made the evaluation process much easier. Lastly, I spent some time developing a Requirements Analysis for the final product. This analysis helped drive the design and development of the blockchain library whilst not restricting the work that I was able to complete.

### 2.1 Starting Point

The project built upon functionality provided by Irmin [1] which is a distributed data store system. Irmin is fast, durable and has all the necessary capabilities required to build a blockchain. The project also made use of Ezirmin [15] which provides a simplified API to Irmin, and defines a log data structure which was used to build the blockchain and mempool structures for this project.

### 2.2 Using OCaml

At the start of the project, I had never used OCaml for any project of significance. Whilst the first year Foundations of Computer Science course had given me some background into functional programming, there were still many key OCaml features which I had to learn. In the first few weeks of my project, I spent time studying the book Real World OCaml [17] which proved a great introduction to many of OCaml's features.

## Pattern Matching

OCaml provides a very powerful syntax for matching patterns which allow you to write functions as shown by Listing 2.1.

```
let pattern_matcher_1 input = match input with
| Card("spades", 1) -> Printf.printf "It's the ace of spades!"
| _ -> Printf.printf "Unlucky"
let pattern_matcher_2 = function
| Card(suit, 1) -> Printf.printf "It's the ace of %s!" suit
| _ -> Printf.printf "Unlucky"
```

Listing 2.1: OCaml Pattern Matching

Listing 2.1 shows a function that will print a special string if it is passed the Ace of Spades. Here, the pattern matching checks that the tuple associated with the data type contains the string `spades` and the number `1`. The second example assigns the variable `pattern_matcher_2` to an anonymous function which matches the first argument of the tuple to the variable `suit`.

## Options

An `Option` is a built in data type that provides a powerful way of using OCaml's pattern matching. By using the `Some(...)` and `None` constructors, one can create something of the type `'a option`. This is comparable to the `null` type in languages such as Java, however as it is part of the type system, it forces the programmer to handle any cases where `null` could be returned.

## Error Handling

OCaml provides multiple different ways of dealing with errors and exceptions. A simple way of signifying an error in your return type, is to return an `option` which will be `None` if there is an error. Whilst this can be inflexible for larger solutions, it also provides a quick and simple way of signifying that something has gone wrong.

Another way of dealing with options in return types is to use the `bind` function:

```
val bind: 'a option -> ('a -> 'b option) -> 'b option
```

As the type signature demonstrates, `bind` takes an `option` and applies a function to its contents if it exists, or returns `None` otherwise.

OCaml provides a built in type `Result.t` which is an extension of optional return types, where the programmer is able to define arbitrary data to accompany the error type. The following demonstrates a successful return type of `int` (with an unspecified `Error` type), and a `string` error type (with an unspecified `Ok` type).

```
# Ok 3;;
- : ('a, int) result = Ok 3
# Error "Something went wrong";;
- : (string, 'a) result = Error "Something went wrong";;
```

## Polymorphic Variants

OCaml allows the programmer to define variant types such as the `Card` type that was defined earlier. This makes it very easy to make use of pattern matching with custom defined types.

OCaml also introduces the notion of polymorphic variants which are more flexible and do not require an explicit type declaration.

```
# let card = `Card ("spades", 1);;
- : val card : [> `Card of string * int ] = `Card ("spades", 1)
```

Listing 2.2: Polymorphic Variants

Listing 2.2 shows how a back-tick can be used to define a polymorphic type, and OCaml has automatically inferred a type. The `>` symbol acts as a lower limit on the tags that the variant `card` can take, i.e. it can have the tag `Card` or any other unspecified tag. When dealing with variant types as *parameters*, the `<` symbol often appears in the type signature to show that the parameter can belong to only a subset of given set of tags. The absence of both of these symbols indicates that a variant can take any value from the given set of tags, rather than a superset or subset.

## Modules and Functors

Modules provide a way of grouping together related code in OCaml. They can be thought of as similar to traditional namespaces, although there are a few key differences. OCaml also lets you define module type signatures which modules have to conform to.

```
module type Math = sig
  type t
  val add: t -> t -> t
  val subtract: t -> t -> t
end

module IntegerMath : Math with type t = int = struct
  type t = int
  let add int1 int2 = int1 + int2
  let subtract int1 int2 = int1 - int2
end
```

Listing 2.3: OCaml Modules and Functors

Listing 2.3 is a simple example that defines a module signature `Math` for adding and subtracting a custom type. The module `IntegerMath` is a module which adheres to this signature. The syntax with type `t = int` serves the purpose of letting the compiler know that the type `t` is externally visible. Whilst this example uses the trivial example of integer maths, it is easy to imagine this extending to, for example, matrices or sets where these functions are not part of the language.

Modules are really useful for allowing the effective division of code into isolated units, but on their own, they are slightly inflexible. Maybe a developer would want to abstract some lower level details of code used by a module. In this case, she would have to create a whole new module for each possible implementation of this abstraction. An example of this could be a datastore that uses either an in-memory or on-disc format for storing data. Functors allow modules to be created from other modules.

```
module Log (AO : Irmin.AO_MAKER) (V: Tc.S0) = struct
  ...
end
```

Listing 2.4: Ezirmin Log Module

Listing 2.4 is an example from the Ezirmin codebase and shows how to define a functor. The parameter `AO` is a module used for creating append only stores, and the parameter module `V` defines a data type. The result of this is a functor, `Log`, which can be used to create a `Log` module with either an in-memory or on-disk backend.

## Development Environment

When developing a large scale system with OCaml, there are a couple of build systems available to use. `jbuilder` [4] is one of these systems which is becoming increasingly popular and is used daily by hundreds of developers. `jbuilder` allows the developer to specify arbitrary directory structures containing executables, libraries and more. I set up my project to compile `Logan`, which includes the interface for running both leader and participant nodes. I also defined multiple executables for running both the leader and participants in example and test cases. I used GNU Make [3] to invoke `jbuilder` which allowed me to easily build and run any executables from the root of the directory.

In order to ensure that the project would always build, I set up a continuous integration workflow using Travis-CI. This ensured that whenever I pushed any updates to my GitHub repository, Travis would attempt to build the system and would notify me whenever there were any errors during the build. This was particularly useful during the evaluation stage when I was installing my project on multiple remote machines for testing. Over the development period, Travis flagged issues such as dependency resolution failures or out of date build scripts and I was able to fix these at the point when they first occurred, rather than weeks later when they would have caused many issues during remote installation.



## Lwt

A library which I spent some time familiarising myself with was Lwt [5]. Lwt provides a way of interacting with threads in OCaml, although in Lwt they are known as ‘Promises’.

```
val Lwt.return : 'a -> 'a Lwt.t
val Lwt_main.run : 'a Lwt.t -> 'a
val Lwt.bind : 'a Lwt.t -> ('a -> 'b Lwt.t) -> 'b Lwt.t
```

Listing 2.5: Lwt Promises

Listing 2.5 shows the basic functions for creating, running and combining threads. The above type `'a Lwt.t` refers to a thread which will eventually terminate with a value of type `'a`, and follows the well established Monad design pattern. `Lwt.return` is a function that takes a value and will create a promise that immediately returns with this value. This is useful when inserting static or precomputed variables into Lwt pipelines. `Lwt_main.run` is the dual of `Lwt.return` and will run a Lwt promise until completion and then return its value. This is useful when retrieving values from an Lwt pipeline. Finally, `Lwt.bind` (or the infix notation `>>=`) will pass the result of a Lwt promise to a function returning another Lwt promise. This is useful for chaining together Lwt promises in a pipeline.

## 2.3 Requirements Analysis

During the preparation stage of my project, I spent some time analysing the requirements that would be suitable for Logan. This proved a good way of guiding the progress of the project and making sure that I solved all the problems that I set out to. Here, I will set out the criteria that I decided upon before starting development on the project.

### 2.3.1 Data Structure

It is required that any node in a Logan network should be able to add items to and view items in a blockchain. The data in the blockchain will be referred to as either *blocks* or *transactions*<sup>1</sup>. From a participant, it should be possible to transactions of arbitrary type. It should also be possible to view an ordered list of all transactions which currently exist in the blockchain. The latency of adding transactions should not increase as the size of the blockchain increases because it is important the library will cope well for systems with extremely long blockchains.

---

<sup>1</sup>Whilst blocks in this project shall be referred to as transactions, most blockchain systems use blocks which contain multiple transactions

```

module type I_LogStringCoder = sig
  type t
  val encode_string: t -> string
  val decode_string: string -> t option
end

module type I_Validator = sig
  type t
  val init: t list -> unit Lwt.t
  val filter: t list -> t list Lwt.t
end

module type I_Config = sig
  type t
  module LogCoder: I_LogStringCoder with type t = t
  module Validator: I_Validator with type t = t
  val remotes: string list
end

module type I_Blockchain = sig
  type t
  val add_transaction_to_blockchain: t -> [> `Error | `Ok] Lwt.t
  val get_all_transactions: unit -> [> `Error | `Ok of t list] Lwt.t
  val get_transactions: int -> [> `Error | `Ok of t list] Lwt.t
end

module Make(Config: I_Config): I_Blockchain with type t =
  Config.t = struct
    ...
  end

```

Listing 2.6: Blockchain Specification

Listing 2.6 is the initial technical specification that I used to define Logan, and the functions complete the following operations:

- `I_Config` contains information which is required to run the blockchain, including `remotes` which is a list of other participating nodes.
- `I_LogStringCoder` is a module that allows the user to specify arbitrary types to be stored on the blockchain, so long as they can be encoded to (and decoded from) a string.
- `I_Validator` is an interface which is defined by the library user. Validation is

performed by initialising a `Validator` module with the transactions already committed to the blockchain. From then on, `Validator.filter` will take a list of requested transactions and will return a subset of them which are the valid transactions. The `Validator` can then assume that these transactions have been committed for future calls to `filter`.

- `Make` is a functor which accepts a configuration module and will return a blockchain module.
- `addtransactiontoblockchain` adds a user defined type to the blockchain and then returns a polymorphic variant type containing information about whether the operation was successful. This will return an error in the case that the transaction is not validated.

This specification differs slightly from the final specification for Logan because it does not take into account the difference between leader and participant nodes. The specification was deliberately designed without focus on consensus so that the focus was on the external functionality rather than the internal implementation. The final interface, while different, provides exactly this functionality.

### 2.3.2 Consensus

Ensuring that Logan maintains consensus was a very crucial part of this project. The actual design and development of the consensus algorithm was completed throughout the duration of the project and involved a lot of research into other consensus mechanisms. However, during the requirements analysis phase of the project I set out some goals for the final implementation. These goals were laid out in order to help drive the design and development of the consensus mechanism. I decided on the following success criteria which I have given names that are used in the evaluation section<sup>2</sup>:

- SC\_1** The consensus mechanism must guarantee strict consistency in the blockchain state. Although strict consistency could add large overhead costs, it is necessary for some applications and so is an important part of the final project.
- SC\_2** As a baseline, Bitcoin achieves a maximum throughput of roughly 10 transactions per second (tps) [11]. Logan should be able to achieve comparable throughputs.
- SC\_3** Again as a baseline, transaction latency achieved by Bitcoin is more than 10 minutes [11]. This is widely regarded as poor performance so Logan should be able to achieve better latencies of an order of magnitude of seconds.
- SC\_4** The latency of adding a block should be constant in the size of the blockchain.
- SC\_5** The consensus mechanism must be scalable. Within the scope of this project, it should be possible for the blockchain to be shared by 3 in a network. Latencies will inevitably grow with the number of nodes in the network. Logan's performance

---

<sup>2</sup>SC stands for success criteria

should demonstrate only modest decreases in performance for increases in nodes in a network.

# Chapter 3

## Implementation

Over the course of this project, I have successfully built Logan, a blockchain library which can perform custom transaction validation. Logan uses a leader-based consensus protocol inspired by Raft [14] and also uses the concept of a ‘transaction waiting room’, or *mempool*, which is used by Bitcoin. Section 3.1 gives a general overview of Logan’s system architecture. Section 3.2 describes the blockchain data structure that I have used, and justifies why it can be considered a blockchain. I will also describe two bugs that I encountered in these codebases and the fixes that I implemented for each. Finally, Section 3.3 gives a description of the research I completed when designing Logan’s consensus mechanism. I will first present a naïve approach to consensus and explain why this is flawed and will cause transactions to be committed out of order. I will then present an improved mechanism, which Logan uses, that guarantees correct ordering of requested transactions.

### 3.1 System Architecture

Logan’s goal is to allow multiple nodes in a distributed system to share a blockchain data structure. Nodes in this system should be able to add transactions to the blockchain and read the entire history of previous transactions. I shall refer to blocks in the blockchain as ‘transactions’ as if they contain only a single transaction, however they easily can be made to contain many transactions because the datatype of transactions is arbitrary and specified by the developer. Logan aims to achieve consensus by using a leader-based approach where a leader node can accept transactions from participant nodes and commit them to the blockchain for everyone to see. Participants view the blockchain by retrieving the latest copy over the network from the leader. Participants request for transactions to be committed by writing to their local mempool. The leader periodically polls the participant mempools over the network to find new transactions to add to the blockchain. When a poll finds new transactions, it will use the Validation module to filter all the valid transactions which are then added to the blockchain. It is also possible for a participant node to exist on the same physical machine as the leader, in which case the leader sources updates directly from the mempool, rather than over an SSH connection. Figure 3.1 shows how the architecture for this system is organised.

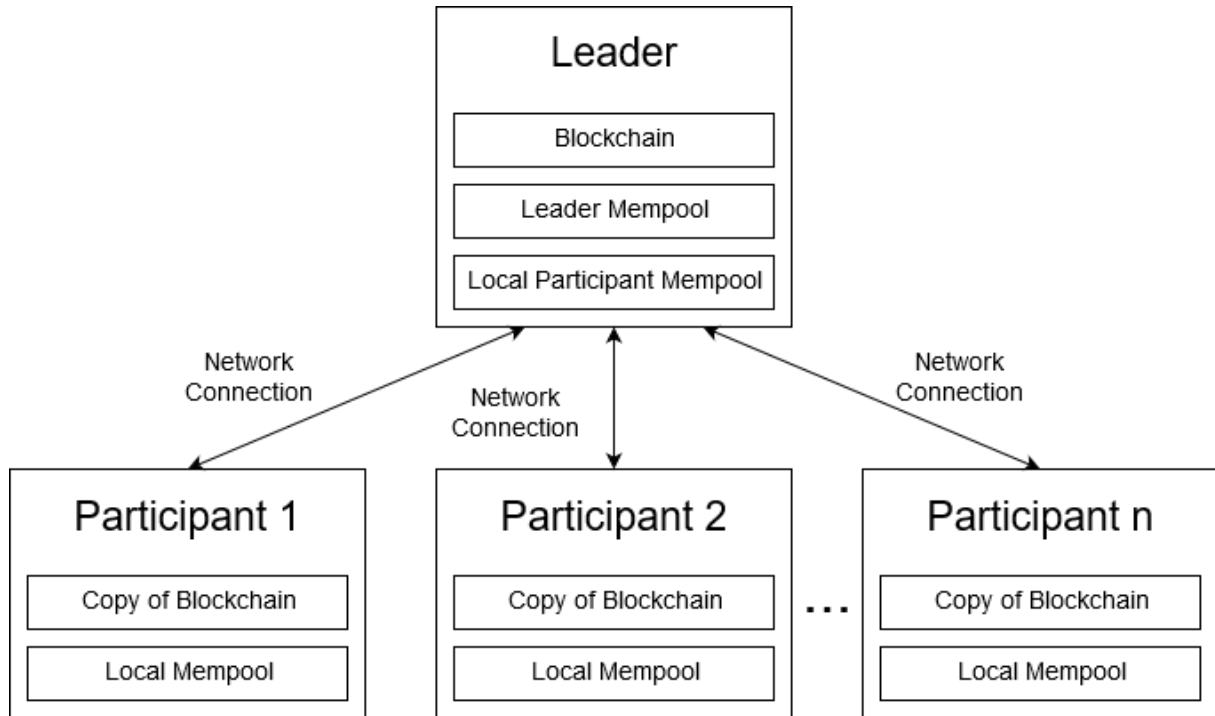


Figure 3.1: Logan system architecture overview

## 3.2 The Blockchain Data Structure

Irmin [9] is a library for OCaml providing datastore functionality using a Git backend. Ezirmin is a wrapper around Irmin that provides a simple log data structure which I have used as a blockchain. In order to justify that this data structure can be considered a blockchain, I took some time to investigate its semantic properties. Whilst there is no universally agreed-upon definition of a blockchain, I have used the following two criteria to define the blockchain:

1. Data is stored in ‘blocks’.
2. Blocks are ordered in a tree structure where each block contains the hash its parent block.

This definition deliberately makes no mention of consensus, and exists purely to justify the validity of the blockchain data structure.

### 3.2.1 Irmin

Irmin exposes three main structures as shown in Figure 3.2: The Block Store, the Tag Store and the Irmin Store. For the reader familiar with Git, these can intuitively be thought of as objects/commits, branches and repositories respectively.



Figure 3.2: Architecture of an Irmin store

## The Block Store

The Irmin Block Store is a heap of immutable blocks. Rather than being addressed by a physical address, these blocks are addressed by the hash of their content. Because the Block Store is content-addressable, once blocks are added, their content can never be updated. Instead, updates to Irmin data structures are always made by adding new blocks to the store.

## The Tag Store

Any mutability in Irmin data structures derive from *tags*. Tags provide a way of indexing into any block in the Block Store. This concept is similar to that of branches or references in Git, which provide a way of indexing into a particular commit in the Git history. Because blocks are immutable, any changes to an Irmin data structure can only be visible if a tag is updated to point to a different block. In this report, I will refer to the HEAD tag, which indexes into the latest recognised log item. When Irmin merges data structures, it creates new blocks and updates the relevant tags to point to these, however, the old blocks remain in the block store.

## Irmin Stores

An Irmin Store is simply the combination of a Block Store and a Tag Store. Considering the criteria set out earlier for a data structure to be considered a blockchain, Irmin Stores satisfy the first criteria, i.e. that data is stored in Blocks. Indeed, they also come close to satisfying the second criteria, as all blocks are indexed by the hash of their content. However, this is not quite enough, as blocks are not required to contain hashes of parents in a chain. In order to satisfy these criteria, I looked to Ezirmin which provides a log data structure.

### 3.2.2 Ezirmin

Ezirmin is a library that provides a simplified interface to the Irmin library. It is designed to provide a interface to Irmin without functors, but useful defaults instead. Importantly, it has a built in log data structure which uses Irmin's append-only store, saved on disk in the Git format.

```
module type FS_Log = sig
  type elt
  type cursor
  val append : ?message:string -> branch -> path:string list ->
    elt -> unit Lwt.t
  val get_cursor : branch -> path:string list -> cursor option
    Lwt.t
  val read : cursor -> num_items:int -> (elt list * cursor
    option) Lwt.t
  val read_all : branch -> path:string list -> elt list Lwt.t
end
```



```
...
end
```

Listing 3.1: Ezirmin Log

Listing 3.1 gives some of the interface for an Ezirmin log which uses a file system backend. The log allows for items to be appended to and read from a log, and the concept of cursors is simply an abstraction for Irmin tags. In particular, the function `read` will read from the item indexed by a cursor, and will return a new cursor for the next unread log item, alongside the result of the read.

### Ezirmin Log as a Blockchain

Logan uses an Ezirmin Log as an implementation of a blockchain, and to verify that this is a valid data structure to use, I investigated the implementation of Ezirmin Logs. Ezirmin Logs use Irmin blocks to store log entries, and therefore satisfy the first criteria for being considered a blockchain. To verify that they also satisfy the second criteria, i.e. that blocks are ordered and contain the hash of their parent, I looked at the implementation of log items.

```
type log_item =
{ time      : Time.t;
  message   : V.t;
  prev      : K.t option }
```

Listing 3.2: Ezirmin Log Item

Listing 3.2 is taken from the Ezirmin Log implementation and shows how each log item has a `prev` value which is a key pointing to its parent log item. This imposes an ordering of log items, and means that any changes to previous log items will not be observed, as they will simply create a new block with a new address. Merging Ezirmin Logs causes new Merge blocks (as opposed to Value blocks) to be created that collate multiple log entries from divergent log histories. These entries are ordered by their timestamps and this means that after a merge, items may appear to have been inserted into the log history. This is not desirable behaviour for a blockchain, so I have ensured that the blockchain data structure maintained by Logan is never merged with other structures, only appended to. Consequently, each blockchain transaction will exist in its own Value block and will never be removed or reordered in the blockchain. Therefore an Ezirmin Log satisfies both of my conditions to be considered a blockchain.

### Merging Ezirmin Logs

Aside from using an Ezirmin Log as the blockchain data structure for this project, I also use a *mempool* log to retrieve updates/transactions from remote mempools. This retrieval process uses the `Ezirmin.Repo.Sync` module to merge new log items into the leader's mempool. Under the hood, this module uses the Git protocol to pull updates over the network.

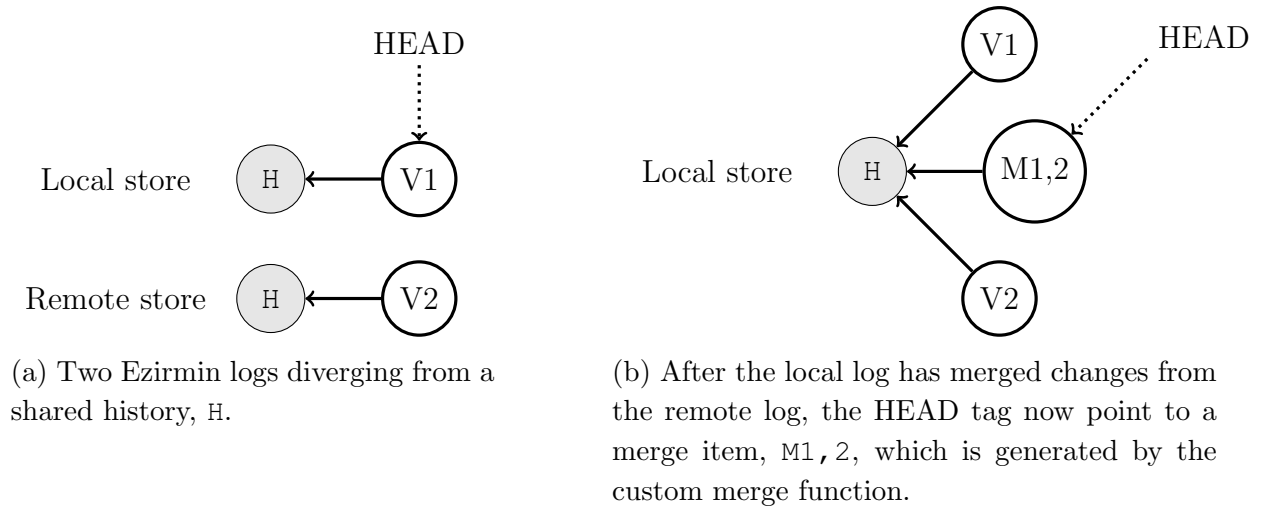


Figure 3.3: Merging Ezirmin logs

Irmin allows for the developer to specify custom merge strategies. Whenever a Irmin Store merges changes from a remote Store, Irmin will do one of two things:

1. If the newly discovered blocks do not have a divergent history to the current store, they will simply be added to the Block Store. In other words, if only new blocks have been added in the remote store, these will be added to the local store.
2. If the remote and local stores have divergent histories, then a custom three way merge is made using the heads of each store and their latest common ancestor. This merge is defined by the developer.

Figure 3.3 shows how a local Ezirmin Log performs a merge from a remote log with a diverging history. Before the merge, the local store has a Value block, V1, but the remote store has a different Value block, V2. After the local store has merged changes from the remote store, a new Merge block, M1,2, has been created which contains both histories as defined by the custom merge function. Blocks V1 and V2 still exist in the block store, but the HEAD tag has been updated to point to M1,2.

### Ezirmin Bugs

Whilst Ezirmin provides a set of very desirable semantic properties, it is not a widely used library. Consequently, during the course of the project, I encountered bugs in the Ezirmin codebase which I had to debug and fix. In this section I shall outline the two bugs that I encountered the changes I made to the Ezirmin codebase to fix them.

The first bug occurs when updates are merged into a log over a network.<sup>1</sup> Irmin uses Git as a backend and in order to merge updates over a network, the `git pull` command is used. In Git, objects are stored as blobs on the leaves of a tree and `git pull` works by retrieving all blobs at the leaf nodes of the tree for a given branch. However in Ezirmin, blobs can contain pointers to other blobs, and `git pull` will not

<sup>1</sup>The issue on GitHub can be found at <https://github.com/kayceesrk/ezirmin/pull/7>

know to retrieve these blob too. This will cause an error when Ezirmin tries to read these objects which do not actually exist locally. The solution that I implemented to this problem is to use an internal branch which uses an Irmin Store to explicitly track every blob in the log. Items are added to this Irmin Store on the internal branch every time they are added to the log. This operation inserts these blobs into the git tree such that if `git pull` is performed on the internal branch, all the blocks required by the master branch will be retrieved.

The second bug that I encountered derived from the merge behaviour of Ezirmin logs when there are more than two remote machines merging updates from each others' log.<sup>2</sup> The issue is that when a Merge block is created, it may contain log items which, on other machines, are stored as Value blocks or as different Merge blocks. The result is that Irmin sees these blocks as different, and Ezirmin does not perform any checks to detect or remove duplicate log items occurring in different contexts. This behaviour resulted from complex sequences of merge operations and so was difficult to reproduce, but in the worst case caused the size of the blockchain to grow exponentially with the number of merge operations performed. In one case, a log with 40 unique log items grew to be greater than 120,000 log items in size due to duplicates. I implemented a fix by removing duplicate log items when a merge operation takes place. Duplicates are found by comparing the log item timestamps, and whilst this does not guarantee their individuality, the timestamps have such significant precision to make this highly unlikely.

## 3.3 Achieving Consensus

Building consensus was by far the most important part of work completed for this project. In order to guide the design of the consensus mechanism, I completed an extensive amount of research on existing algorithms. This section will briefly summarise this research and my conclusions about their suitability for Logan. The resulting design for consensus is a leader based approach, where participants can commit transactions to a mempool. The leader polls these mempools for updates, which are validated and then committed to the blockchain. This blockchain can be read by all participants, and provides a definitive source of ordered, committed transactions.

### 3.3.1 Existing Consensus Algorithms

#### Proof of Work

Proof of Work (PoW) is a consensus mechanism, used by many cryptocurrencies to avoid the double spending problem [13]. This mechanism uses the concept of *miners* which are nodes that add random *nonce* values to blocks before computing the hash of the resulting block. If the hash is preceded by a certain number of zeros, this is considered a proof of computational work and blocks are broadcast out to a network. Participants can be sure that a block is not fake with a probability that increases with the size of the

---

<sup>2</sup>The issue on GitHub can be found at <https://github.com/kayceesrk/ezirmin/pull/8>

chain after that block.

Importantly, this scheme assumes that no participant can be trusted and it also wastes a large amount of energy [1]. It also assumes that Miners can always be rewarded for Mining and this may not always be true, so this scheme would not be suitable for some applications.

## **Mempools**

Mempools are an important part of the design of Bitcoin, and whilst they are not inherently linked to the Proof of Work consensus algorithm, they are worth investigating as they are used by Logan. When a Bitcoin transaction is made, it is first written into what is known as a Mempool. This transaction can then be seen by participating miners, who can then choose to put this in the next block that they mine. This is significant, as it provides a ‘waiting room’ for any transactions that have not yet been validated.

## **Proof of Stake**

The Proof of Stake (PoS) algorithm [7] is used by some cryptocurrencies and works by randomly allowing participants to create (or ‘forge’) a single block. However, the probability that a participant is chosen to forge a block, is weighted by its stake, such that participants with higher stakes in the blockchain are more likely to be chosen to forge a block. With PoS, there is no need to waste lots of energy in the process of mining. Using PoS also allows trust to be distributed according to an arbitrary heuristic which can be desirable property in some applications.

Unfortunately, the notion of stake that is used by PoS may not always be available in the design of a general blockchain system. It also, like PoW, assumes no trust in participating nodes and is therefore not suitable for use in Logan.

## **Paxos**

Paxos is a family of consensus protocols which can be used to guarantee consistency in distributed systems. It was first proposed in a paper by Leslie Lamport in 1998 [12], although the paper was first submitted in 1990. The main part of the algorithm is split into two sections, propose and accept where a value is proposed by a node and accepted if a quorum of nodes make a promise to accept, and then accept the value.

Paxos has many issues including unspecified behaviour in certain situations, lack of guaranteed progress and overhead of implementation. I have not used it in this project but I have partially taken inspiration from the Roles used by Paxos in the design of my leader based protocol.

## Raft

Raft [14] is an algorithm that was designed to be equivalent and as efficient as Paxos, however, it also places a much greater emphasis on comprehensibility. It uses the notion of a *strong leader*, which is an elected server that has total control over which log entries are accepted. If the leader does not send a heartbeat message within a certain timeout period, other nodes in the network will detect this and start an election for a new leader.

Raft is a simple algorithm that is easy to understand, but it also guarantees the *Log Matching Property* that if two logs contain a log entry with the same index and term, then that entry, and all preceding entries will be identical. The notion of a strong leader used in Logan is inspired by Raft.

### 3.3.2 Roles in a Logan's Approach

Logan uses a mempool and a simple leader-based algorithm that is inspired by the previously described consensus protocols, and in this section I will describe this approach. Because I have implemented a centralised algorithm, my specification has differed slightly from that presented in the Requirements Analysis to take into account differing functional requirements for a leader and for a participant. As I am assuming that all participants can be trusted, it is possible to use a leader-based approach without introducing security issues such as the ones tackled by the Proof of Work mechanism. This approach also reduces the potential complexity and overheads of implementing completely decentralised consensus. I have introduced the notion of validation which allows the leader to accept or reject transactions depending on arbitrary conditions defined by the developer. Finally, Logan uses the notion of a *replica* which is a machine that performs some of the leader's functionality to improve fault tolerance. Fault tolerance will be described in detail in Section 3.4.

## Leaders

Logan uses the notion of a *strong leader* similar to that used by the Raft protocol. The leader is chosen statically in order to reduce the complexity of implementation, and it also has a statically defined list of *remotes* which specifies the location of all participants. The leader is a node which will never actually request transactions to be added to the blockchain, its role is simply to periodically read requests from the mempools of participants, validate them, and then add them to the blockchain. This blockchain can be read by any participant, and is treated as the empirical source of which transactions have been committed and in which order. That is, any two nodes that read a copy of the blockchain, will always agree on content and ordering of transactions in the blockchain, up until the end of the shortest copy.

```
module type I_LeaderConfig = sig
  type t
  module LogCoder: Participant.I_LogStringCoder with type t = t
```

```

    module Validator: I_Validator with type t = t
    val remotes: string list
end
module type I_Leader = sig
    val init_leader: unit -> (unit -> unit Lwt.t) Lwt.t
end
module MakeLeader (Config: I_LeaderConfig) : I_Leader = struct
    ...
end

```

Listing 3.3: Leader Specification

Listing 3.3 is the specification of the leader module, which differs slightly from the specification presented in the Requirements Analysis. In particular, `init_leader` performs an initialisation step, and then returns a function which, when executed, will actually start the consensus process.

## Participants

Participants, in contrast to leaders, can request transactions to be added to the blockchain. This is done by writing a transaction to a local mempool, which is then read by the leader.

```

module type I_LogStringCoder = sig
    type t
    val encode_string: t -> string
    val decode_string: string -> t option
end
module type I_ParticipantConfig = sig
    type t
    module LogCoder: I_LogStringCoder with type t = t
    val leader_uri: string option
end
module type I_Participant = sig
    type t
    val add_transaction_to_mempool: t -> [> `
        Could_Not_Pull_From_Remote | `Validation_Failure | `Ok]
        Lwt.t
    val get_transactions_from_blockchain: int -> [> `Error | `Ok
        of t list] Lwt.t
    val get_all_transactions_from_blockchain: unit -> [> `Error |
        `Ok of t list] Lwt.t
end
module Make(Config: I_ParticipantConfig): I_Participant with
    type t = Config.t = struct
    ...

```

end

#### Listing 3.4: Participant Specification

Listing 3.4 is a specification that shines a light on the role of participants and the functionality they provide. The module includes the ability to define custom data types that can be stored on the blockchain, to read from the blockchain, and to attempt to write to the blockchain by writing to a mempool. It is also important to note that participants can exist on the same machine as a leader, but will exist in an entirely separate process.

### Replicas

Replicas are nodes which contain the latest copy of the blockchain. I shall explain later how fault tolerance can be introduced by ensuring that transactions only exist on the visible blockchain once they have been recognised by a quorum of replicas. Replicas are useful because the leader is a single point of failure, and if it fails, it is important to have another machine which can recover the state of the leader just before the point of failure.

### 3.3.3 Retrieving Updates from Mempools

In order to see requested transactions, the leader has to observe the mempools of the participants. The leader does this by pulling updates from participant mempools and then adding them to the blockchain. However, it is important to make sure that the leader does not miss transactions or commit transactions out of order. This is tricky because after pulling updates from many mempools the local copies will reflect each mempool at a different moment in time. In this section, I will give a naïve method for retrieving updates and I will show how this method is flawed. This will then motivate the design of a more complex approach that ensures all transactions are committed in order. In both approaches, the leader will continuously poll mempools for updates and commit transactions that it believes to be valid.

#### A Naïve Approach

The first approach to retrieving updates from participants is to pull updates from all the participants into separate branches of the leader's mempool. It is possible view newly retrieved updates for each mempool by maintaining a *Latest Known Cursor* that points to the latest transaction seen by the leader, i.e. in its last poll. Figure 3.4 shows how the *Latest Cursor*, LC, to the latest item in the mempool, is used to retrieve updates. In this diagram the dotted nodes represent transactions that have been pulled in the latest poll. The leader can traverse back through the log from this cursor until it reaches the *Latest Known Cursor*, LKC, and then it can return the newly found updates.

Once the leader has retrieved updates from the mempools of all participants, it can order these transactions by their Ezirmin log item timestamp. After pulling updates from all participants, the leader can now see a list of newly retrieved transactions which are

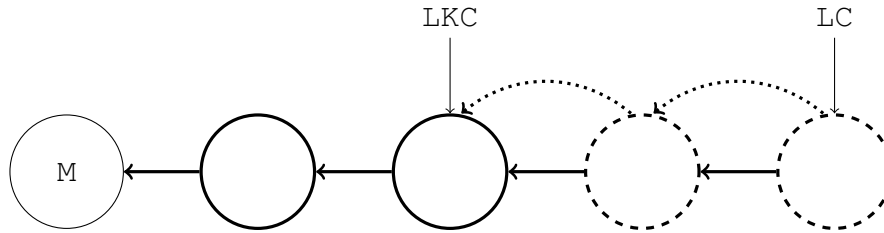


Figure 3.4: Retrieving updates from a single participant mempool

ordered by a timestamp. These updates can be validated and added to the blockchain, and the *Latest Known Cursor* updated to the latest message in each of the mempool.

However, this approach is fundamentally flawed and causes many updates to be seen out of order. This is because of the delays that occur when mempool updates are retrieved over the network from multiple participants. Figure 3.5 demonstrates a typical situation where this occurs. The chains labelled  $\bar{w}$  represent the mempools on the Workers' machines and the middle chain represents the stream of updates as seen by the leader. These updates are shown as if they are part of a single merged mempool, although in reality they exist on isolated branches in the leader's mempool, and are only merged by the leader in memory. In the figure, updates from the first worker are pulled before updates from the second. Whilst the operations may take place in parallel, network latencies can cause these operations to pull updates at different times. After the pull from the first participant has completed, the participant may have added additional transactions. These transactions will be timestamped before the latest transaction in the second participant's mempool, such that when the leader next polls for updates, transactions will be found which have a timestamp before the latest item committed to the blockchain. These items should have been committed first as they have an earlier timestamp. This transaction cannot be inserted into an earlier position of the blockchain because it would mean that different participants might observe the blockchain in diverging states. It is not clear whether or not these transactions should be committed late or skipped, but ideally all transactions should be committed to the blockchain in the order that they were committed at participants. I shall refer to these transactions as *missed*.

### A Complex Approach

In order to solve this problem, I first examined the nature of these *missed* transactions and noted the following properties:

1. Missed transactions must have been added whilst the leader is pulling updates. If they had been added before the poll had begun, then they would have been retrieved in previous poll. Therefore, *missed* transactions must occur after the latest timestamped transaction from the previous pull.
2. Missed transactions must have been added at a point in time earlier than the latest update from the subsequent round of retrieved updates. If they occurred at a later point in time, then they would be correctly received in that subsequent leader poll.



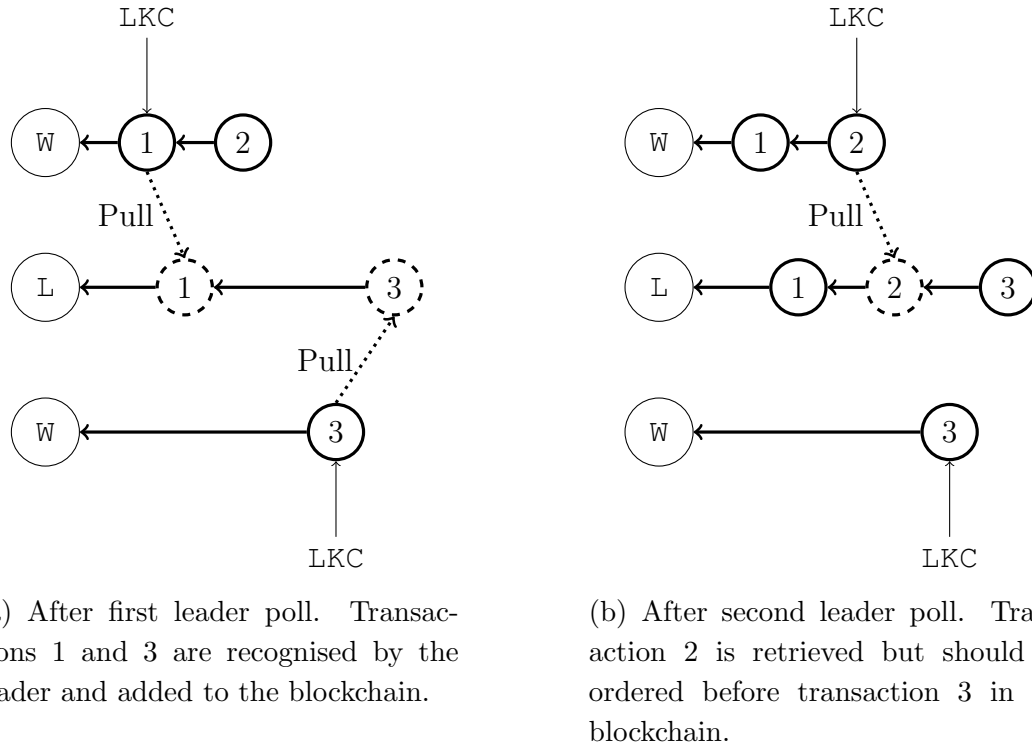


Figure 3.5: Missing mempool updates with a naïve consensus mechanism

These properties naturally suggest a less naïve algorithm for retrieving updates which only adds updates that have existed for more than one poll cycle. Once the leader has retrieved a set of updates, it will add them to a *retrieved* buffer. In the next poll cycle, the leader will transfer the retrieved buffer to a new *to-be-committed* buffer. The leader now retrieves new updates from mempools, as before, and will do one of two things for each newly retrieved transaction:

- If a transaction is earlier than the latest transaction in the to-be-committed buffer, the leader will insert it into the correct position in the to-be-committed buffer based on its timestamp.
- If a transaction is later than the latest transaction in the to-be-committed buffer, the leader will add it to the retrieved buffer.

Figure 3.6 demonstrates how this approach would solve the problem presented in Figure 3.5. In Figure 3.6a, transaction 2 has been missed whilst transactions 1 and 3 have been added to the retrieved buffer. In Figure 3.6b, transactions 1, 2 and 3 have all been inserted into the to-be-committed buffer and will be added to the blockchain. Transaction 4 has occurred after the latest item in the to-be-committed buffer, i.e. transaction 3, and is therefore added to the retrieved buffer instead.

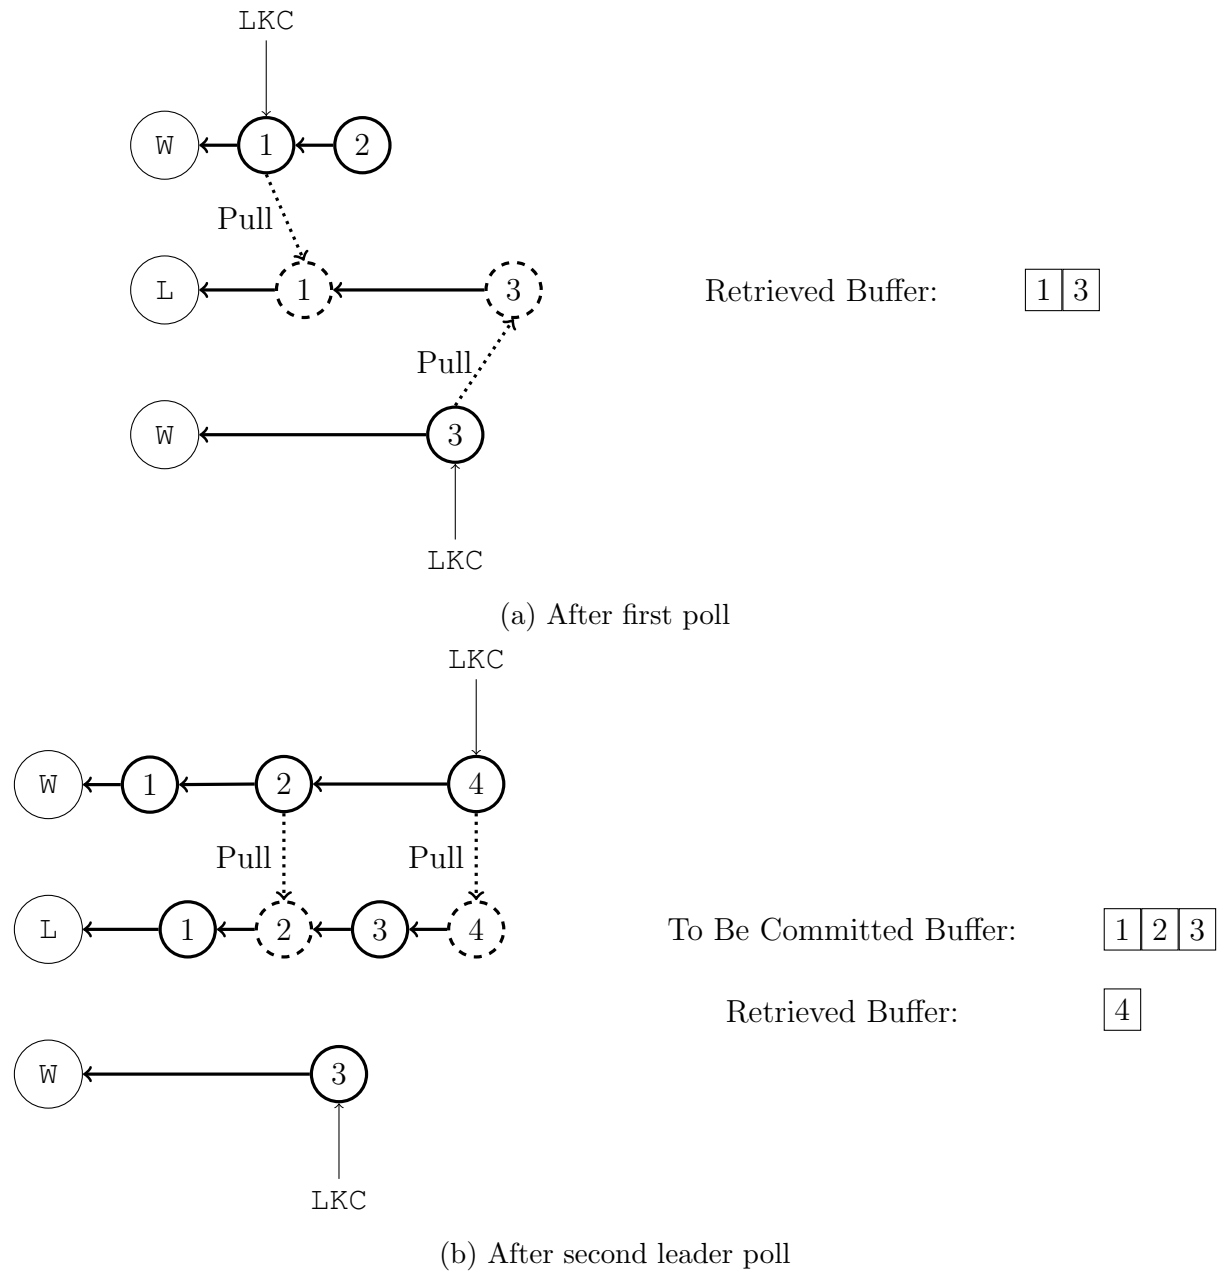


Figure 3.6: Buffering updates in a complex consensus mechanism

## 3.4 Tolerating Leader Failure

Now that I have detailed Logan's data structures and how it achieves consensus, the only aspect of the implementation left to consider is Fault Tolerance. Because Logan implements a leader-based consensus mechanism, this means that the leader is a single point of failure. In the event of a failure, different participants may have views of the blockchain at different times and the leader may have committed transactions to the blockchain which were never viewed by any participants. Building full fault tolerance and recovery into Logan would be outside the scope of this Part II Project. Instead, in this section I will show the simple mechanism that Logan uses which allows manual recovery of the blockchain state in the case of a leader failure. I will also give a more advanced mechanism which uses a daemon thread that removes the bottleneck from the leader's execution. This solution was not implemented as Git has very coarse grained locking that causes many race conditions for this solution, but it will demonstrate how Logan could operate if a protocol with finer grained locking was used. This will justify that a more complex and automated approach to recovering from leader failure is possible, and will demonstrate a good starting point for implementing such a mechanism.

To introduce fault tolerance, I have used *replicas*. Replicas, in computer science, are nodes which duplicate some part of another node's behaviour in order to allow recovery from failure. They can be either *active*, if they fully duplicate the actions of another replica, or *passive*, if they complete some operation and then transfer the results to another replica [8]. The replication I will demonstrate will be passive.

In order to incorporate the notion of a replica, the process of adding commits to the blockchain needs to be altered slightly. Now, before a commit is made, it needs to be recognised by a quorum of replicas. Irmin's notion of branches exposes a perfect primitive for this application. In a poll, the leader can commit transactions to an uncommitted *cache* branch before pushing this to all replicas. If a quorum of these push operations return successfully, then the leader can merge these transactions into the main blockchain branch to be viewed by all participants. If a failure were to occur at any point after this merge, it is now guaranteed that any transactions in the leader's blockchain will also exist on a quorum of replicas. This means that the system has access to sufficient information to reconstruct the contents of the blockchain before failure.

```
let rec start_leader () =  
    retrieve_and_process_updates() >>=  
    commit_to_temporary_blockchain_branch >>=  
    push_to_replica_quorum >>=  
    merge_temp_branch_into_blockchain_master >>=  
    start_leader
```

Listing 3.5: Naive Leader Loop

Listing 3.5 shows pseudocode for the leader's poll cycle, now incorporating replicas.

One of the major issues with this approach is that it presents a bottleneck in the leader's execution which is likely to cause significant delays.

The above describes the replication process that Logan currently implements, however I will now suggest a better method that removes the bottleneck from the leader's execution. I was not able to implement this as the coarse grained locking provided by Git caused many race conditions, but a better protocol with finer locking would allow the following mechanism to work because there are no real data dependencies in this solution. I propose a different approach that starts an asynchronous thread which is in charge of pushing to replicas and merging the transactions which have been pushed. I shall refer to this as the *push thread*, and the *main thread* will now only commit items to the *cache* branch. This thread takes the blockchain cache branch and use this to create a new *push-cache* branch which it pushes to replicas. The difference between these two branches is that the cache branch will constantly be updated as new items are added, whereas the push-cache branch will remain fixed pointing to a particular transaction whilst a series of transactions are being pushed to replicas. When this push returns successfully, the thread will then merge this branch into the blockchain master branch, and loop. Figure 3.7a shows a blockchain with four transactions in the cache branch. The first two of these transactions have been recognised by the push thread and are in the process of being pushed to a quorum of Replicas. The final two transactions have been added after the push thread started its latest loop, and are therefore currently not being pushed to replicas. Figure 3.7b shows the state of the blockchain after the push thread has successfully pushed its updates to a quorum. Now the master branch includes the two new transactions, and the *push-cache* branch has been updated such that the two newest cache transactions will be pushed to the blockchains of all the replicants.

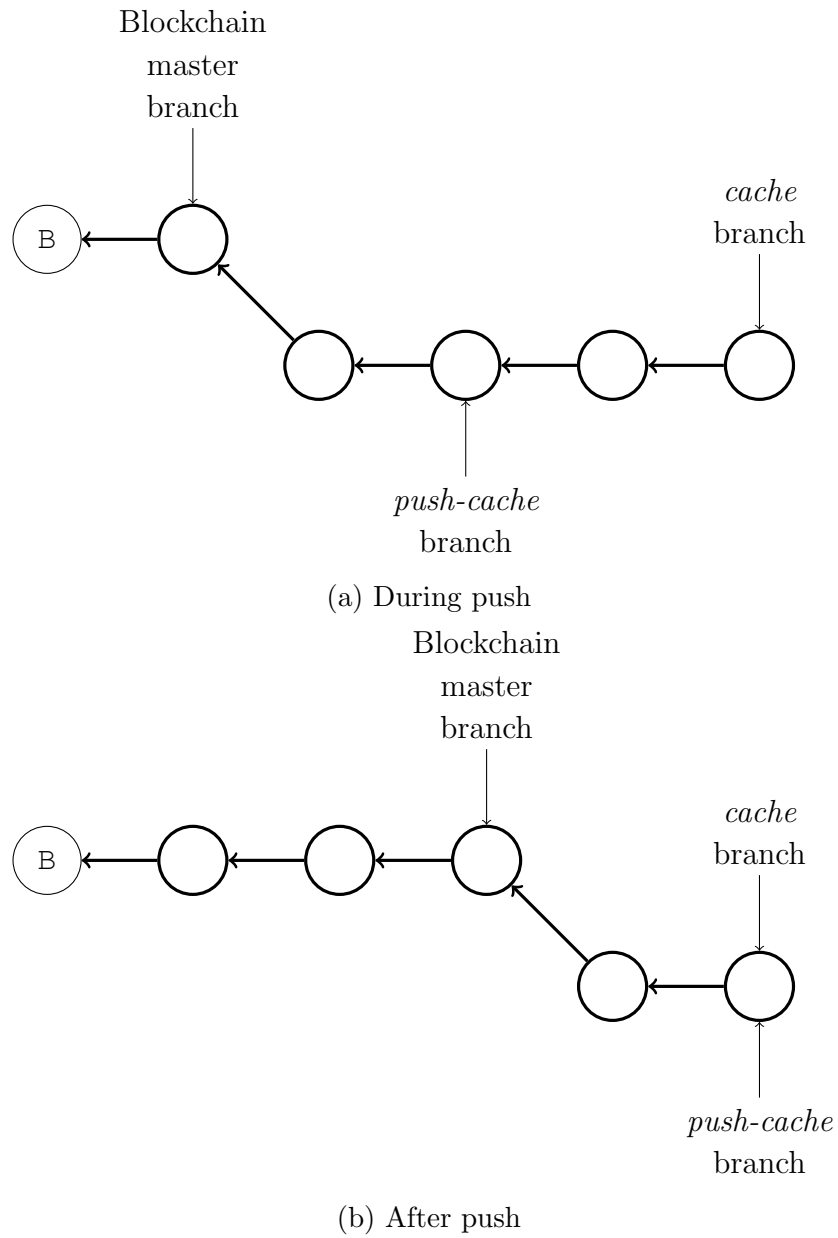


Figure 3.7: Blockchain data structure with cache for pushing to replicas



# Chapter 4

## Evaluation

I have successfully built Logan, a blockchain library for OCaml, and in this section I will describe my evaluation of its performance. In Section 2.3.2 I set out 5 success criteria which are presented again here in short:

**SC\_1** Logan should achieve strict consistency

**SC\_2** Logan should be able to achieve throughputs greater than 10tps

**SC\_3** Logan should be able to achieve latencies on the order of magnitude of seconds

**SC\_4** Logan should achieve constant latencies in the size of the blockchain

**SC\_5** Logan should have a scalable consensus mechanism

Of these success criteria, the Implementation chapter shows how SC\_1 is satisfied. In this chapter I will detail how Logan fulfils SC\_2 and SC\_3. Lastly, I will show how Logan fails to achieve SC\_4 and SC\_5, however, I will justify why this is not caused by my implementation. I will describe how a better synchronisation library would allow my implementation to achieve these goals. In this evaluation I have used a leader machine with a single core Intel Xeon 2.60GHz CPU, a 2.0MB cache and running Ubuntu 16.04.3 LTS. My first participant machine has single core Intel Xeon 2.20GHz CPU with a 2.0MB cache and running Ubuntu 17.10. My second participant machine is a single core Intel Xeon 2.40GHz CPU with a 3.0MB cache and running Ubuntu 16.04.4 LTS.

### Metrics Used

In order to evaluate the performance of Logan, I have looked at three key metrics: latency, applied throughput and observed throughput. In this evaluation, I will define the latency of a transaction as the time elapsed between it being committed to a participant's mempool, and it being committed to the blockchain. In a blockchain system, it is important that the latency is as low as possible because latency dictates how long a user must wait before they can be sure of their transaction. In the context of a cryptocurrency, for example, long latencies will cause users to become irritated and potentially stop using the currency. Another useful measure is throughput, measured in transactions per second (tps), because it shows how well a system can cope with large loads. Specifically I will look

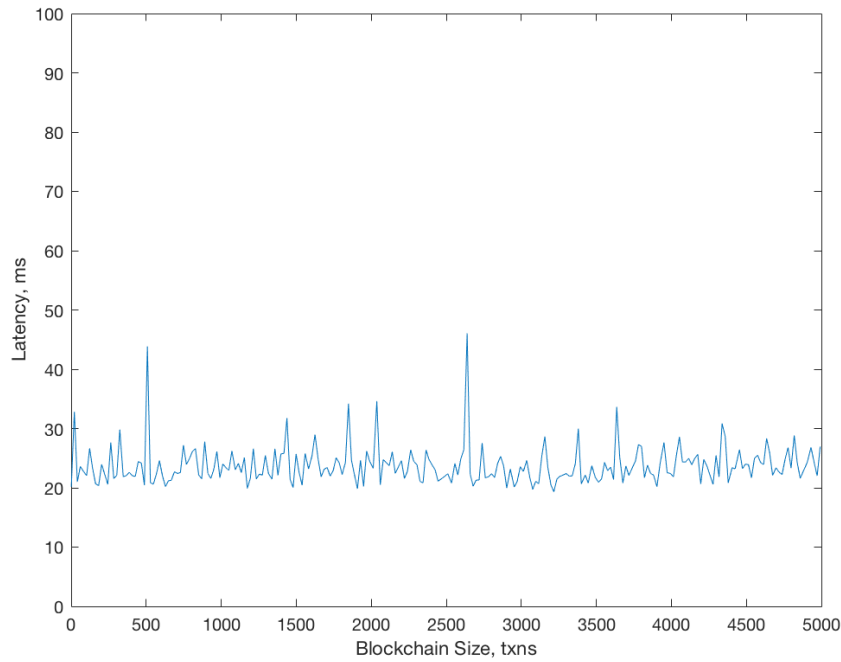


Figure 4.1: Latency variation with blockchain size on a local participant

at the *applied* throughput which describes how frequently the participants are collectively making transactions, and the *observed* throughput which describes how frequently the leader commits transactions to the blockchain. In my experiments I have control over applied throughput and I have measured the resulting observed throughput. It is important that Logan should be able to achieve high observed throughputs because it is a limiting factor on how many users can interact with Logan at once. I have evaluated how the applied throughput affects the latency and observed throughput of Logan transactions, in order to try to determine the optimal use case conditions for a Logan system. Lastly, I have looked at how latency varies with the size of the blockchain at a constant applied throughput. It is important that the system should be able to work well even when the size of the blockchain is large so that performance will not degrade over time.

## 4.1 Performance with a Local Participant

### 4.1.1 Latency

Figure 4.1 shows how the latency of Logan transactions varies as the size of the blockchain increases in the case that there is one participant on the same physical machine as the leader. It is clear that the latency of adding a transaction is constant in the size of the blockchain. This is a very significant result because it proves that the logic which Logan uses is capable of achieving constant time blockchain appends in the size of the blockchain. This means that Logan achieves SC<sub>4</sub> for the case where there is a single local participant. Latencies are also very low, of the order



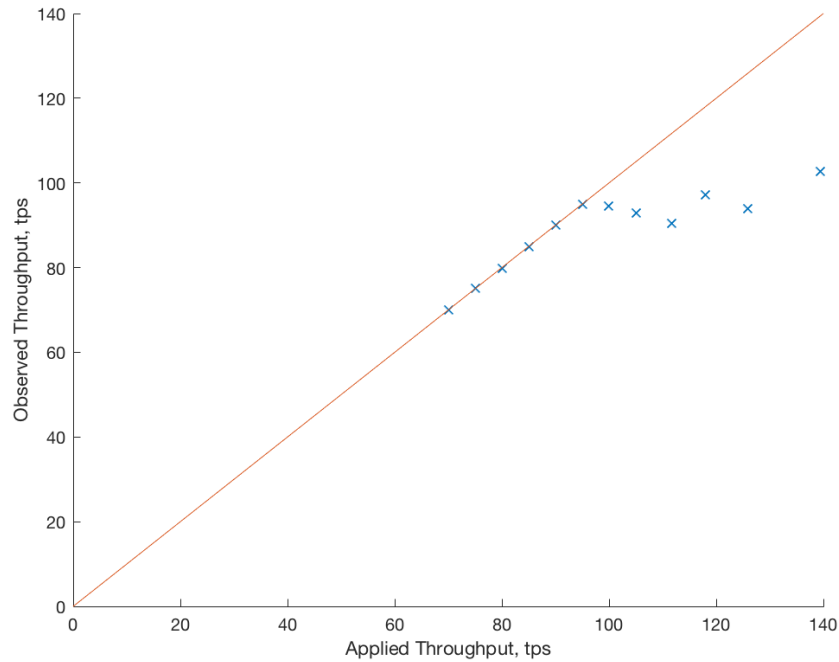


Figure 4.2: Latency variation with throughput on a single local participant

of magnitude of milliseconds, which means that Logan also achieves SC\_3, in this use case.

### 4.1.2 Throughput

Now that I have evaluated latencies, I will look at the throughputs that the system is capable of achieving. Figure 4.2 shows how the observed throughput varies with the applied throughput. The straight line plot in this figure indicates the performance of an ideal system that is capable of matching any applied throughput. The figure clearly shows that Logan is achieving ideal performance up until 100tps. At this point, the observed throughput starts to plateau as the system starts to become overloaded. This result well exceeds the requirement of 10tps set out by SC\_2 and shows that Logan's logic is capable of achieving high throughputs. It is worth noting that this result is using a low performance virtual machine hosted in the cloud, with limited disk write performance. It is reasonable to expect that a more powerful machine would be able to achieve significantly better results.

## 4.2 Performance with Single Remote Participant

### 4.2.1 Latency

In order to see how the system performs when network latencies are involved, I first looked at Logan's performance when there is just one leader and one remote participant,

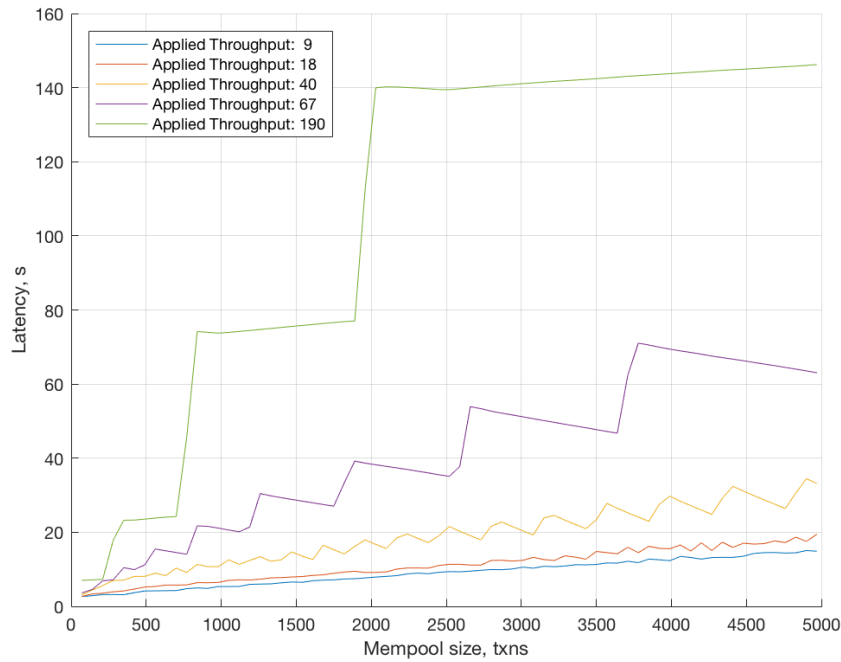


Figure 4.3: Logan latencies with increasing blockchain size

i.e. a participant on a different machine to the leader. Figure 4.3 compares the latency of making a transaction and the size of the mempool, for different applied throughputs. Mempool size has been used in place of blockchain size because it is the structure being pulled over the network, not the blockchain. The first noticeable feature of this graph is the saw-tooth shape of the latencies at high throughputs. In these cases, the flat or downward sloping segments represent transactions which were committed in the same poll cycle after being collectively retrieved over the network. Importantly, these teeth are relatively small up until around 40tps. This figure also shows an obvious linear increase in latency for all throughputs and this is undesirable behaviour as it indicates that large mempools will accompany poor performance.

In order to examine what was causing the linear increase in latencies with mempool size, I logged the time that the leader spent completing the most time consuming tasks for each poll cycle. These tasks turned out to be pulling mempool updates over the network and adding updates to the blockchain. Figure 4.4 shows how these delays increase linearly over time and compares them with the number of updates that are pulled in each poll cycle. The figure demonstrates a causality where an increase in time taken to pull mempool updates causes an increase the number of updates pulled in the next cycle. This has the knock on effect of increasing the time spent adding these updates to the blockchain. I can therefore conclude that the increase in the latency of pulling mempool updates prevents the system from being able to add transactions to the blockchain in constant time.

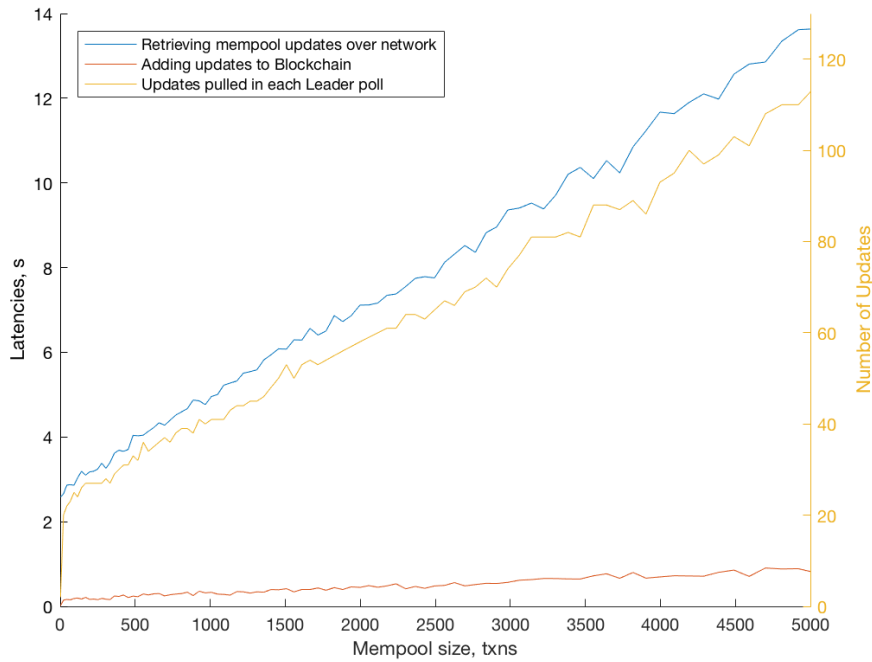


Figure 4.4: Delays incurred by leader for every poll cycle. Throughput is constant at 10tps

### 4.2.2 Using Pure Git

The latencies shown in Figure 4.4 are particularly high. This is because Irmin uses an OCaml implementation of Git called ‘OCaml Git’ [6], and the performance of this implementation is much worse than the performance of ‘pure’ Git [16], i.e. the implementation that is interacted with via a shell. I have built an implementation of Logan which calls pure Git commands directly rather than using OCaml Git. In this section I will show the extent to which this improves Logan’s performance. This comes with many disadvantages such as worse compatibility with unikernel systems and a lack of type checking. I am not suggesting that this is an adequate solution, but I am simply showing that a better Git implementation in OCaml can drastically improve performance.

Figure 4.5 is a parallel of Figure 4.3 but using this new implementation instead. The figure shows that the system can perform significantly better by using pure Git. Specifically, the system can achieve much better constant factors in the increase of latencies with mempool size. At a mempool size of 5000 and an applied throughput of 10tps, latencies have been reduced from 15s (with OCaml Git) to 8s (with pure Git). Figure 4.6 is a parallel of Figure 4.4 that demonstrates that this speedup is due to the greatly reduced times that the leader spends pulling mempool updates as the mempool size grows. Whilst this bottleneck is much lower than before, it still takes up much more time than any other stage of the leader’s execution. This suggests that Git is still a very inefficient way of transferring updates to the leader. This could be due to many unnecessary overheads in the implementation of Git, such

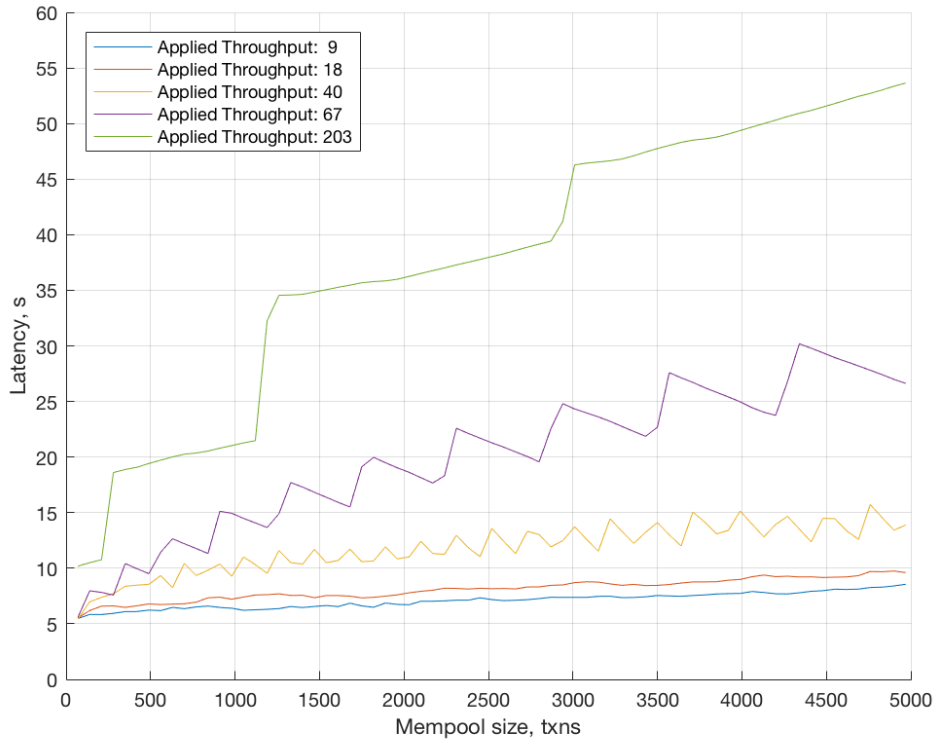


Figure 4.5: Logan latencies using pure Git instead of OCaml's implementation



Figure 4.6: Delays incurred by leader when using pure Git. Throughput is constant at 10tps

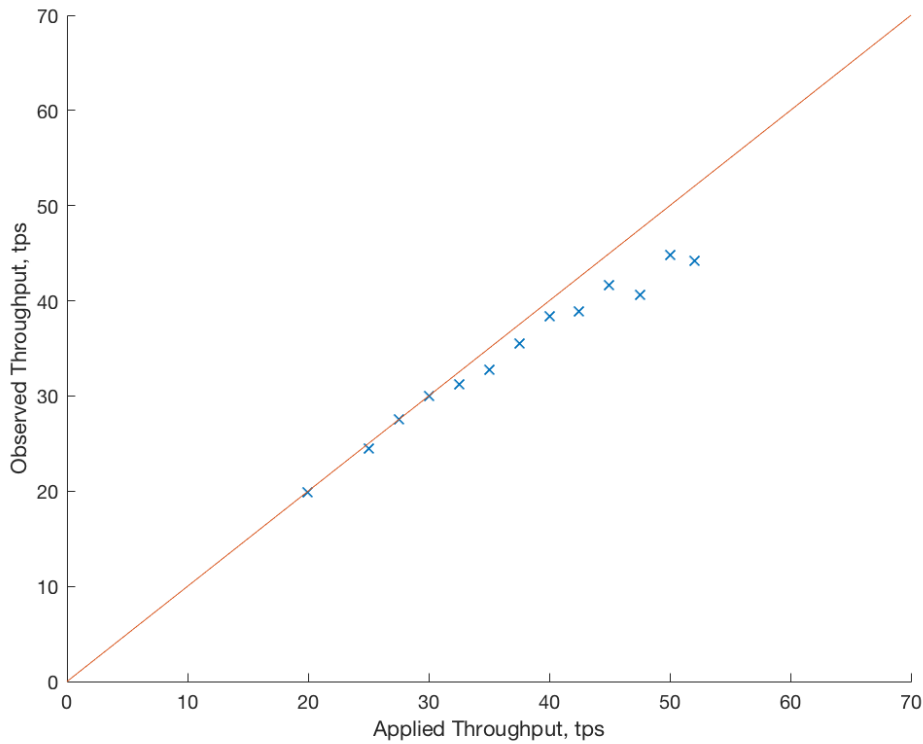


Figure 4.7: Observed throughput plateau with increasing applied throughput

as the mechanism Git uses for finding new updates to be transferred between repositories. Therefore if a better protocol was used, even better performance could be achieved.

### 4.2.3 Throughput

In the previous sections, I have evaluated how transaction latencies evolve over time, and compared the results for different applied throughputs. This does not, however, shed light on when the system reaches its maximum throughput capacity. Figure 4.7 shows how the throughput of transactions made to the blockchain (observed throughput) varies with the throughput of transactions made to a participants mempool (applied throughput). This is compared to a linear plot showing the ideal performance of a leader that never becomes overloaded. This figure shows that the system starts diverging from ideal performance at an applied throughput of around 30tps. Whilst the performance gets worse, it does not quite plateau. This is because the participant is not capable of committing enough transactions to overload the leader in this scenario. Overall, this result demonstrates that an ideal sustained operating throughput is around 20tps transactions per second which fulfils SC.2. Although the system will be able to handle bursts of higher throughputs, it will not be able to cope with these throughputs for sustained periods of time.

### 4.2.4 Achieving Constant Time Latencies

I have now shown that Logan can perform well by using pure Git, however, there is still the unfortunate result that transaction latencies increase linearly with the size of the mempool being pulled. This is due to the linear increase shown by Figure 4.6 and the fact that Logan’s mempools are always growing. There are two ways of solving this problem which I will detail in this section.

The first approach requires a better synchronisation mechanism that allows updates to be pulled with constant time in the size of the mempool. This could be achieved by using, for instance, a streaming protocol that keeps track of all the updates which have previously been sent, rather than reevaluating all the updates that need to be sent every time a pull operation is made. This protocol would allow a leader to pull updates in constant time, which would in turn mean that the time taken for adding blocks to the blockchain would be constant. This means that all of the leader’s operations could be completed in constant time and therefore latencies would be constant in the size of the mempool/blockchain.

Another approach would be to use a queue rather than a log for the mempool data structures. The fact that mempools are always growing is not a requirement for Logan. A mempool only needs to contain the latest uncommitted transactions and could therefore a queue data structure would be a natural choice. In this scenario, participants would add transactions to their mempool queue which would then be pulled and popped by the leader. Participants could periodically merge changes (which are just pops) from the leader’s copy in order to reduce the size of their mempool. This would mean that the size of the mempool would not be linear in the number of transactions made by a participant, and would no longer cause a linear increase in the time taken by a leader to pull updates. This would also have the desirable side effect of allowing the participant to see when the leader has recognised requested transactions, because they would get popped off the queue. Whilst Ezirmin provides a Queue data structure, I have not used it in this project in order to reduce implementation complexity. Using this structure would also likely decrease initial performance as it uses OCaml’s implementation of Git. Because of the bidirectional nature of merging changes (i.e. popping and pushing), it would not be trivial to use command line Git in this case.

Overall, in the case of a single remote participant, Logan is able to comfortably reach throughputs of up to 40tps which is much above the requirement of 10tps set out by SC\_2. Latencies in this case are initially less than 10s which is a good result for most applications and fulfils SC\_3. Finally, whilst Logan does not fulfil SC\_4, I have demonstrated how this is due to the overheads from using Git, and I have shown two methods that would allow Logan to achieve this goal.

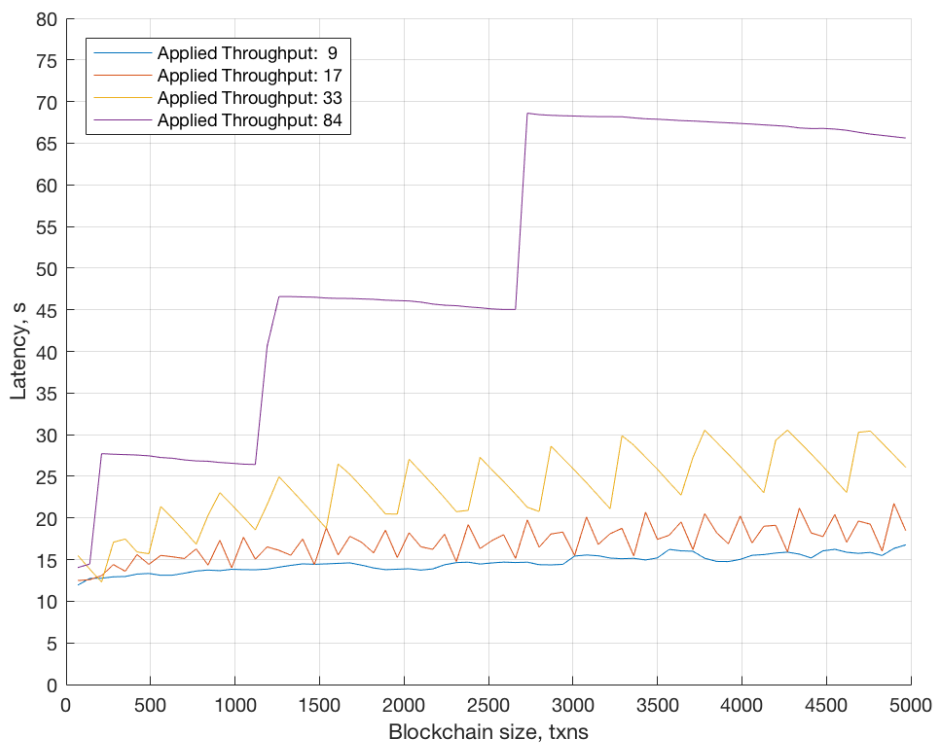


Figure 4.8: Latency variations against blockchain size with two remote participants using pure Git

## 4.3 Performance with Multiple Remote Participants

### 4.3.1 Latency

I have shown that Logan can perform well with a single remote participant, but it remains to show how this performance scales to multiple participants. Figure 4.8 shows how the latency of making transactions varies with throughput when the pure Git protocol is used. An important feature of this graph is the fact that the slope of the plots has not changed much from the case with only one remote participant. For a throughput of around 10tps, transaction latencies will rise by 4.5s over 5000 transactions compared to 3.1s in the single participant case. I consider this a modest increase that would indeed be solved by using a better synchronisation protocol as described in Section 4.2.4. With this protocol, Logan would satisfy SC<sub>4</sub>.

Another difference is the fact that transaction latencies now start at 11.9s, whereas they were 5.5s in the single participant case. This is because native Git does not allow any parallelism when pulling updates from multiple different remote repositories, and therefore, all remote repositories must be pulled sequentially. Even if a protocol is used that can achieve constant time blockchain appends, this result limits latencies to be linear in the number of remote nodes in a network which is undesirable. Indeed, using the OCaml Git implementation shows a similar increase of initial transaction latency

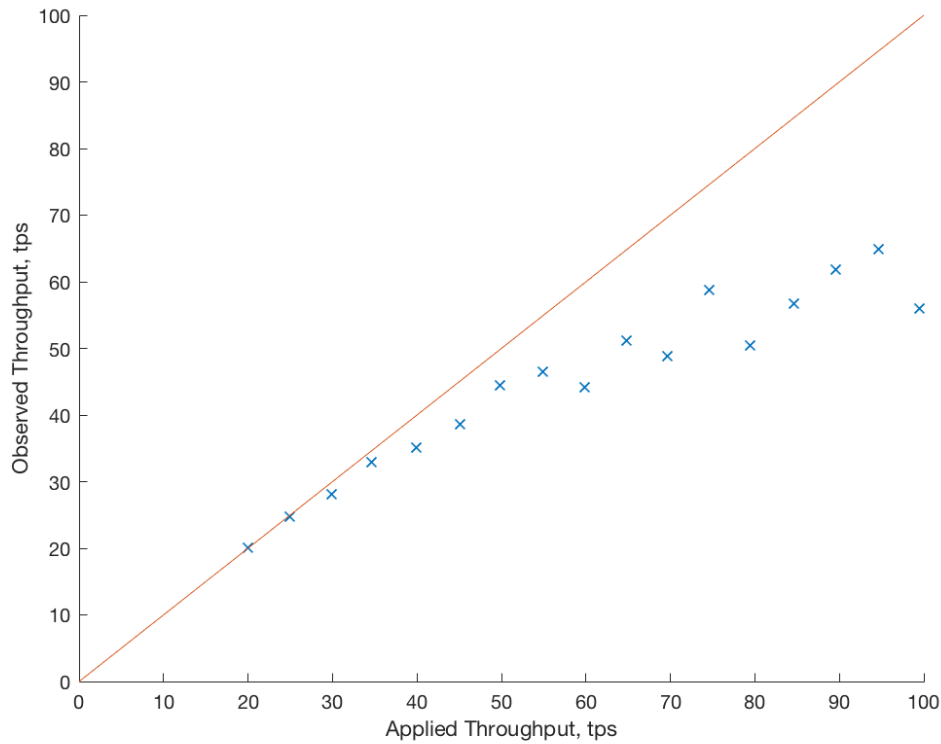


Figure 4.9: Latency variations against blockchain size with two remote participants using pure Git

from 2.7s to 4.5s. It is unfortunate that neither OCaml Git nor pure Git are able to exploit more levels of parallelism, because it is not unreasonable to expect that these implementations should be able to handle concurrent pulls into isolated branches. Should this be possible, the latencies would only be bound by the largest participant pull latency, not the number of participants, and Logan would be able to achieve SC<sub>5</sub>.

Overall I conclude that Logan does not satisfy SC<sub>4</sub> or SC<sub>5</sub>, but a synchronisation mechanism should allow these goals to be reached. However, even with multiple nodes in a network, latencies will still be modest in comparison to the 10 minute latency of a Bitcoin transaction, so even in its current state I can consider my implementation to be somewhat successful.

### 4.3.2 Throughput

The last aspect of Logan's performance to evaluate for two remote participants is Throughput. Figure 4.9 shows the observed throughput against the applied throughput of a Logan system with two participants and one leader. The system starts to diverge from ideal throughput at around 30tps, indicating that a suitable sustained operating throughput would be around 20tps. Again, it can be seen that the system can cope with higher applied throughputs for short bursts but not for sustained periods of time. This is exactly the same as the case for only a single remote participant. Whilst in the previous section,



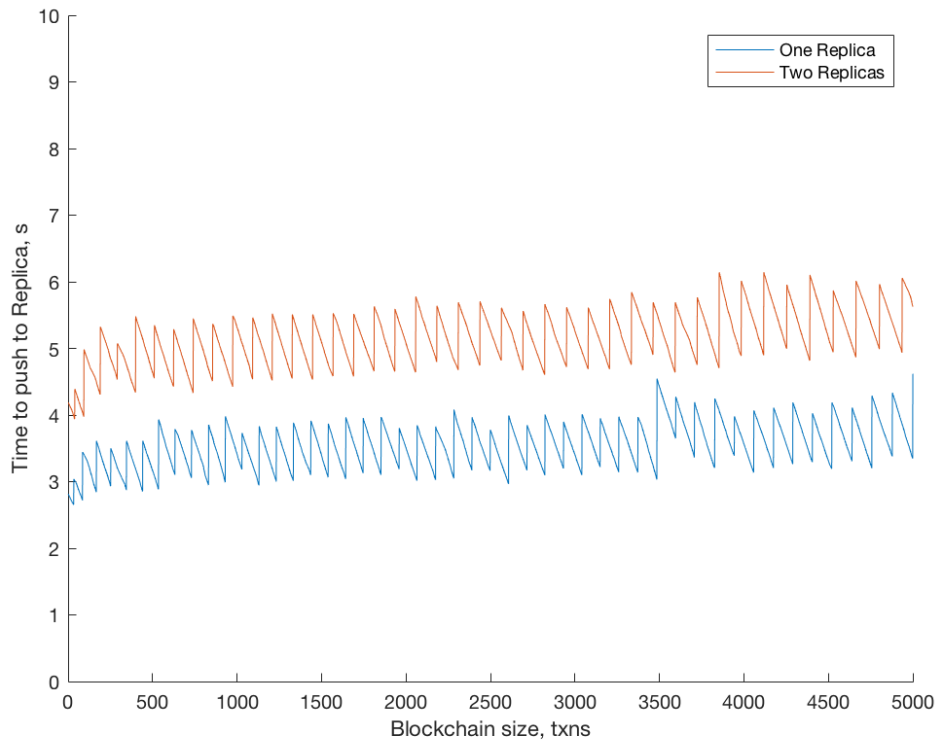


Figure 4.10: Time taken between transactions being added to cache branch and being merged to main blockchain branch, for a single remote replica

I showed that the latencies will grow with the number of nodes in a network, this result shows that a system will still be able to cope with the same throughputs. In this sense, not only does Logan satisfy SC<sub>2</sub>, but also the SC<sub>5</sub>.

## 4.4 Performance with Leader Replication

In section 3.4 I described how Logan can be updated to introduce the simple notion of a passive replica. In order to justify that this only introduces minor latencies, I have tested the performance of the system with one remote participant at a throughput of 10tps. Figure 4.10 shows the time taken between a transaction being added to the blockchain's cache branch, and it being merged into the blockchain's main branch, i.e. after being pushed to a replica. Unfortunately the latencies of pushing to a remote repository also increase with the size of the blockchain, as is the case for pulling. However, this is again a problem that is minor and would not exist with a better synchronisation protocol. Importantly, for the case where there is one Replica, the additional latencies are around 3s which is small and would be an acceptable waiting time for most applications. In this case, the system's latencies are still well within the requirements of SC<sub>3</sub>. Figure [?] also shows that using two Replicas rather than one increases latencies by roughly 1.5s. I again conclude that this is a very acceptable latency in the context of SC<sub>3</sub>.

Additionally should the use my suggested approach of using a daemon thread to push transactions to replicas, there would be no additional latencies to the leader's loop cycle and this means that it should in theory be able to sustain exactly the same throughputs as it would without having any replicas. I therefore consider this a successful demonstration of passive Replication and a good starting point for developing a more complex Fault tolerance solution.

# Chapter 5

## Conclusion

### 5.1 Successes

When I started this project, my goals were to design a library that would allow developers to easily create blockchain applications using OCaml. I have successfully designed and implemented Logan, a blockchain library that achieves that goal. Logan uses a leader based approach to consensus and can achieve latencies of around 10s and throughputs of up to 30tps. Logan uses Git to store data and to communicate over the network and this has proved to be a large bottleneck in this project. Latencies are linear in the size of the blockchain if there are multiple nodes in a network and this is due to the implementation of Git. Git also has very coarse grained locking that doesn't allow for much of the parallelism required by Logan for pulling updates and pushing to Replicas. However, I have shown that Git is the only bottleneck in Logan's operation and that a better synchronisation protocol would allow the linear blockchain appends and much better latencies.

### 5.2 Possible Further Work

#### 5.2.1 Improved Synchronisation Protocol

The biggest flaw with Logan that I have mentioned in this report is the use of Git. Further work on Logan should include a new implementation of the network synchronisation protocol.

#### 5.2.2 Failure Tolerance and Changing Leaders

Tolerating failure is an aspect of this project that I have only touched upon in this project. I have shown how Logan can perform replication but further work could include implementing an automated approach for detecting and recovering from Failure. This work could also include allowing a network to reallocate a leader after leader failure.

### 5.2.3 Adding Participants Dynamically

Currently, as well as only being able to define a single leader, participants can only be defined statically. Some consensus mechanisms introduce ways of adding and removing nodes to a network and I think it would be very feasible to build this feature into Logan.

# Bibliography

- [1] Bitcoin energy consumption index. <https://digiconomist.net/bitcoin-energy-consumption>.
- [2] Ethereum white paper. <https://github.com/ethereum/wiki/wiki/White-Paper>.
- [3] Gnu make. <https://www.gnu.org/software/make/>.
- [4] jbuilder. <https://jbuilder.readthedocs.io/en/latest/overview.html>.
- [5] Lwt: A cooperative threads library for ocaml. <https://ocsigen.org/lwt/>.
- [6] Ocaml git: Pure ocaml git format and protocol. <https://github.com/mirage/ocaml-git>.
- [7] Proof of stake faq. <https://github.com/ethereum/wiki/wiki/Proof-of-Stake-FAQ>.
- [8] DEFAGO, X., AND SCHIPER, A. Specification of replication techniques, semi-passive replication, and lazy consensus.
- [9] GAZAGNAIRE, T. Introducing irmin: Git-like distributed, branchable storage. <https://mirage.io/blog/introducing-irmin>, 2014.
- [10] HABER, S., AND STORNETTA, W. S. How to time-stamp a digital document.
- [11] KYLE, C., AND ITTAY, E. On scaling decentralised blockchains.
- [12] LAMPORT, L. The part-time parliament.
- [13] NAKAMOTO, S. Bitcoin: A peer-to-peer electronic cash system.
- [14] ONGARO, D., AND OUSTERHOUT, J. In search of an understandable consensus algorithm.
- [15] SIVARAMAKRISHNAN, K. Ezirmin: An easy interface to the irmin library. <http://kcsrk.info/ocaml/irmin/crdt/2017/02/15/an-easy-interface-to-irmin-library/>, 2017.
- [16] TORVALDS, L. Git: A distributed version control system, 2005.

- [17] YARON, M., ANIL, M., AND JASON, H. *Real World OCaml*. O'Reilly Media, Sebastopol, California, 2013.

# Appendix A

## Project Proposal

# Building a Blockchain Library for OCaml

---

Charlie Crisp, Pembroke College

December 29, 2017

**Project Supervisor:** KC Sivaramakrishnan

**Director of Studies:** Anil Madhavapeddy

**Project Overseers:** Timothy Jones & Marcelo Fiore

## Introduction

The blockchain, in its simplest form, is a tree-like data structure. Chunks of data are stored in 'blocks' which contain the hash of the contents of the previous block. This creates a 'blockchain' which can exhibit branching in the same way that a tree data structure can (see Figure 1). One of the most important features of a blockchain, is that a change in a block, will alter the block's hash, thereby altering all the future blocks in the chain. This makes it very easy to validate that the data in a blockchain is trustworthy, by verifying the hash in a block, is the same as the hash of it's parent's content.

Blockchain technology has generated a lot of interest in recent times, but



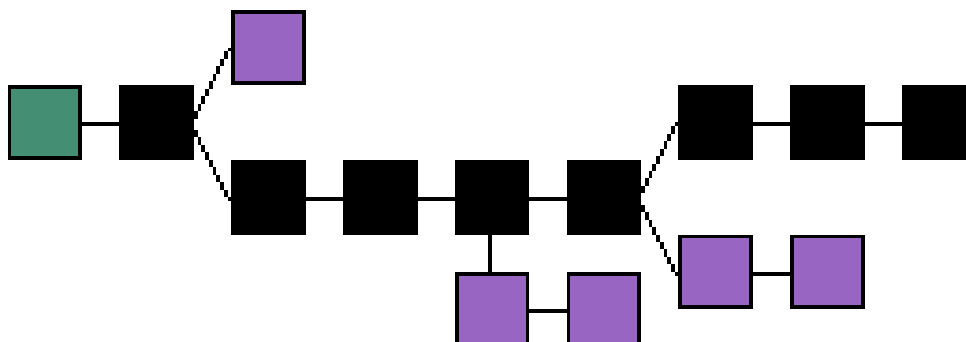


Figure 1: A typical blockchain structure [3]

mostly in the field of cryptocurrencies. With a simple Proof of Work consensus algorithm, the blockchain can be used to build a secure, distributed ledger of transactions. However, whilst the uses of the blockchain are far wider reaching than cryptocurrencies, progress outside of this field has been much slower.

I will build a pure OCaml, reusable blockchain library to allow the creation of distributed, secure ledgers, which are agreed upon by consensus. The library will allow users to create and add entries to a distributed blockchain ledger with just a few lines of code. The users will also be able to trust that entries in the blockchain are exactly replicated across all nodes in the network.

It will be built on top of Irmin [1] - a distributed database with git-like version control features. Being pure OCaml, the blockchain nodes can be compiled to unikernels or JavaScript to run in the browser. I will evaluate the blockchain by prototyping a decentralised lending library and evaluating the platform's speed and resilience.

## Starting point

The project will build upon functionality provided by Irmin [1] which is a distributed database system. Irmin is fast, durable and has the branching capabilities which are required to build a blockchain.

## Resources required

I will be using a Macbook provided by OCaml Labs [2] in order to develop the source code for the project. If the Macbook fails, then I will easily be able to transfer my work onto the MCS machines, as my project has no special requirements.

My work will also be backed up to a git repository hosted on GitHub and saved to a dedicated memory stick on a daily basis.

During the evaluation stage I will be running my platform on different cloud based devices and/or Raspberry Pi's. There are many possible providers for cloud computing, including Amazon Web Services and Microsoft Azure. OCaml Labs [2] will provide the necessary funds to acquire these resources.

## Background

### Consensus

Consensus is a group process where a network of nodes will reach a general agreement. There are different ways of achieving consensus but here are some of the most common:

1. **Proof of Work:** Trust is given to nodes which can prove that they have put in computational work. This is the consensus mechanism used by Bitcoin.
2. **Proof of Stake:** Nodes are selected to validate blocks based on their stake in the blockchain. There are few variations on this algorithm which introduce notions such as delegation or anonymity.
3. **Raft Consensus:** A leader is elected and acts as a governing authority until it fails or disconnects, whereupon a new leader is elected.

## Work to be completed

The work for this project will be split into the following major parts.

1. Design and build a module to allow nodes to create and maintain a blockchain ledger. This will include allowing nodes to add blocks to the chain and to form new branches.

2. Design and build a module to allow nodes to interact over a network and to achieve consensus. As highlighted the Background section, there are many different ways to achieve consensus, and a large part of this work will be to determine which method is most suitable. This decision will take into account a method's failure tolerance in terms of nodes failing and network failure, as well as general speed and any requirements (e.g. computational work for a Proof of Work algorithm).
3. Design an application using these modules. This will take the form of a book lending platform where nodes will be able to register books and lend them to other nodes in the network. This application has been chosen, because the blockchain library should allow for typically centralised applications to be created in a decentralised way. It will also allow for testing of critical features, for example, books should never be 'doubly-spent', i.e. if one user believes they have ownership of a book, then no other user will think the same.
4. Design an evaluation program to simulate different load on the lending platform. This will be run in different configurations in order to measure the performance of the platform.

## Evaluation metrics and success criteria

I will consider the project to be a success if the following criteria are achieved:

1. Nodes in the network are able to connect and communicate information.
2. Nodes are able to achieve consensus about the state of the distributed ledger.
3. Nodes are able to reconnect after being individually disconnected.
4. Nodes are able to re-converge after a network partition.

In order to evaluate the performance of the system, I will measure the *throughput* and *speed* of transactions of the book lending platform. Throughput will be measured in transactions per second, and speed will be quantified as time taken to complete a transaction. I will evaluate how these properties vary with respect to the following metrics:

1. **Number of nodes:** I will scale the number of nodes in the network between the range of 2 and 5.
2. **Rate of transactions:** I will vary the number of transactions made per second.

Should I achieve and be able to measure the above criteria within the time frame of my project, I will further test system against the following metrics:

1. **Network latency between nodes**
2. **Network bandwidth of nodes**

## Timetable

1. **Michaelmas Weeks 2-4** (12/10/17 - 01/11/17):  
Set up an environment for developing OCaml and familiarise myself with the language and it's module system. This is important because the blockchain library needs to be reusable, and therefore well isolated.
2. **Michaelmas Weeks 5-6** (02/11/17 - 15/11/17):  
Familiarise myself with Irmin and it's data structures. This is important as I have never used the library before, but it will be used to build the blocks in the blockchain library. In this time I will also begin to design the API of my library.
3. **Michaelmas Weeks 7-8** (16/11/17 - 29/11/17):  
Finalise the API and start to build the module for creating and interacting with a distributed ledger. This will also involve investigating which hashing algorithms can be used to form the blockchain data structure.
4. **Christmas Vacation** (30/11/17 - 17/01/18):  
Finalise the API of the module for achieving consensus between multiple nodes. This work will also include investigating different methods of consensus and their suitability for my project.
5. **Lent Weeks 1-2** (18/01/17 - 31/01/18):  
Build the module for achieving consensus between modules. I will also start work on an lending library application which will be used to evaluate the performance of the blockchain library.

6. **Lent Weeks 3-4** (01/02/18 - 14/02/18):  
Finish work on the lending library application and install it on a number of Raspberry Pi and/or cloud based devices. I will also begin work on my dissertation and I aim to complete the Introduction and Preparation chapters.
7. **Lent Weeks 5-6** (05/02/18 - 28/02/18):  
Evaluate the performance of the platform by simulating load from each of the devices and measuring the speed of transactions. A stretch goal for this period is also to evaluate a range of further metrics. Additionally I will continue work on my dissertation and aim to complete the Implementation chapter.
8. **Lent Weeks 7-8** (01/03/18 - 14/03/18):  
Finish a first draft of my the dissertation by writing the Evaluation and Conclusion chapters. I will also send the dissertation to reviewers to get feedback.
9. **Easter Vacation** (15/03/18 - 25/04/18):  
With a first draft of the dissertation completed, I will use this time to review the draft and to make improvements. I will also incorporate feedback from reviewers, and complete the Bibliography and Appendices chapters.
10. **Easter Weeks 1-2** (26/04/18 - 09/05/18):  
Conclude work on dissertation by incorporating final feedback from reviewers.
11. **Easter Week 3-Submission Deadline** (10/05/18 - 08/05/18):  
I aim to have completed the dissertation by this point, and to be focusing on my studies. However, this time may be needed to make any final changes.

## References

- [1] Irmin - A pure OCaml, distributed database that follows the same design principles as Git.  
<https://github.com/mirage/irmin>

- [2] OCaml Labs - An initiative based in the Computer Laboratory to promote research, growth and collaboration within the wider OCaml community  
**<http://ocamlabs.io/>**
- [3] Image of blockchain data structure from Wiki Commons.  
**<https://commons.wikimedia.org/wiki/File:Blockchain.png>**