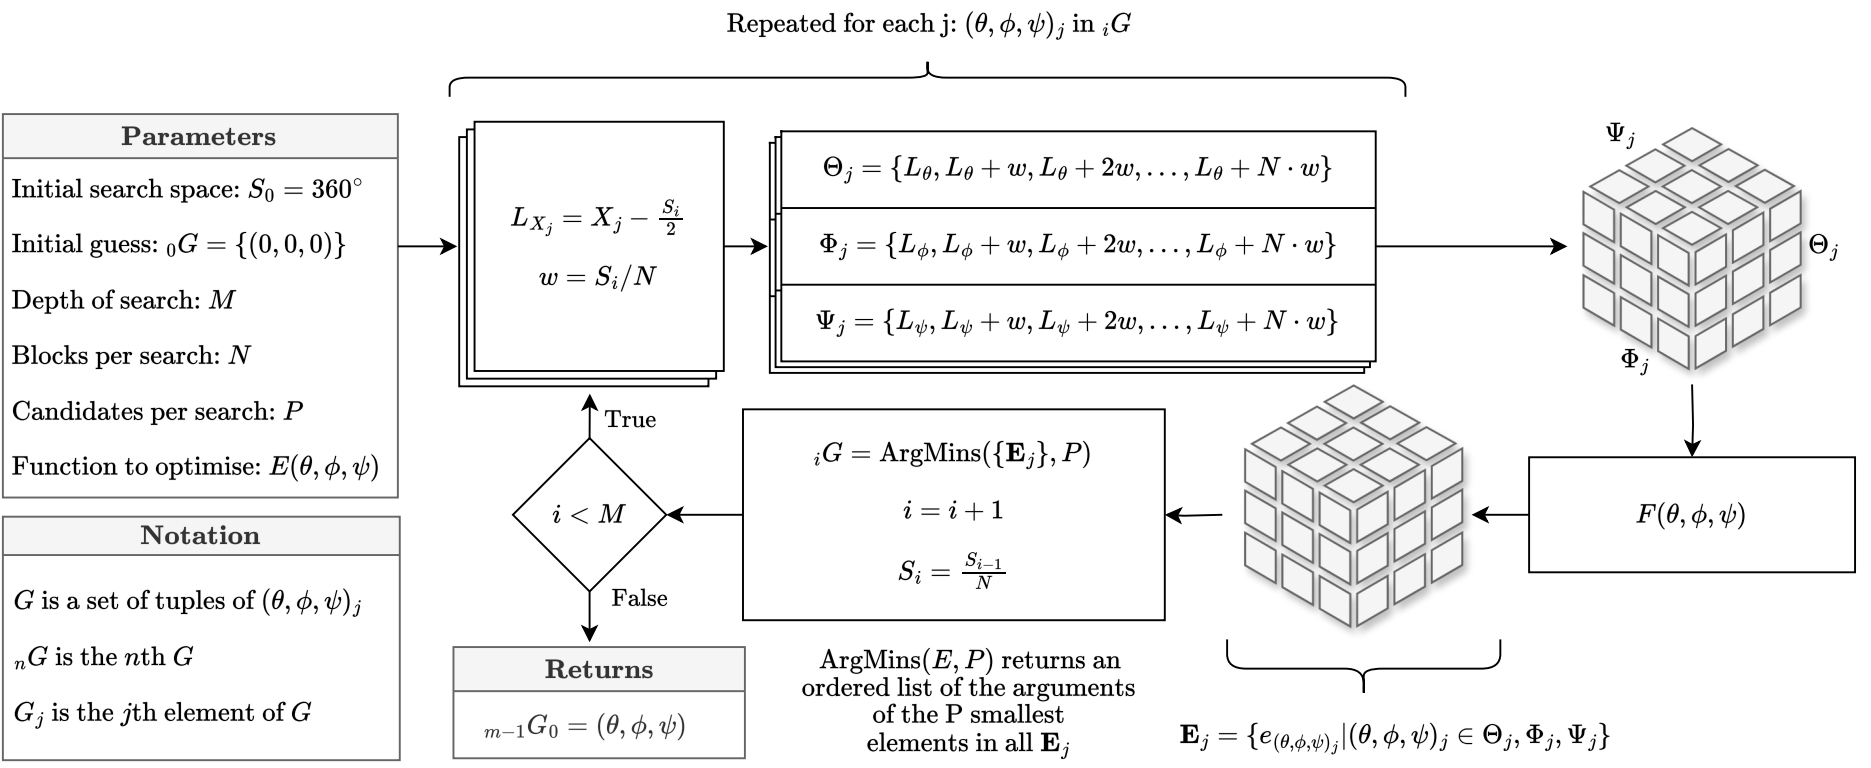
Repeated for each j: $(\theta, \phi, \psi)_j$ in ${}_iG$
Parameters
Initial search space: $S_0 = 360^\circ$
Initial guess: ${}_0G = \{(0,0,0)\}$
Depth of search: M
Blocks per search: N
Candidates per search: P
Function to optimise: $E(\theta, \phi, \psi)$
$L_{X_j} = X_j - \frac{S_i}{2}$
$w = S_i/N$
$\Theta_j = \{L_\theta, L_\theta + w, L_\theta + 2w, \ldots, L_\theta + N \cdot w\}$
$\Phi_j = \{L_\phi, L_\phi + w, L_\phi + 2w, \ldots, L_\phi + N \cdot w\}$
$\Psi_j = \{L_\psi, L_\psi + w, L_\psi + 2w, \ldots, L_\psi + N \cdot w\}$
Ψ_j
Θ_j
Φ_j
$F(\theta, \phi, \psi)$
$\mathbf{E}_j = \{e_{(\theta,\phi,\psi)_j} | (\theta, \phi, \psi)_j \in \Theta_j, \Phi_j, \Psi_j\}$
${}_iG = \text{ArgMins}(\{\mathbf{E}_j\}, P)$
$i = i + 1$
$S_i = \frac{S_{i-1}}{N}$
ArgMins(E, P) returns an ordered list of the arguments of the P smallest elements in all $\mathbf{E}_j$
$i < M$
True
False
Notation
G is a set of tuples of $(\theta, \phi, \psi)_j$
${}_nG$ is the nth G
G_j is the jth element of G
Returns
${}_{m-1}G_0 = (\theta, \phi, \psi)$