



Coverage comparison of different models: MCAR_30

```
source("../utils/compute_coverage.R")  
data_name = 'MCAR_30'  
n_imputations = 10
```


Coverage from different imputation methods: Univariate pmf

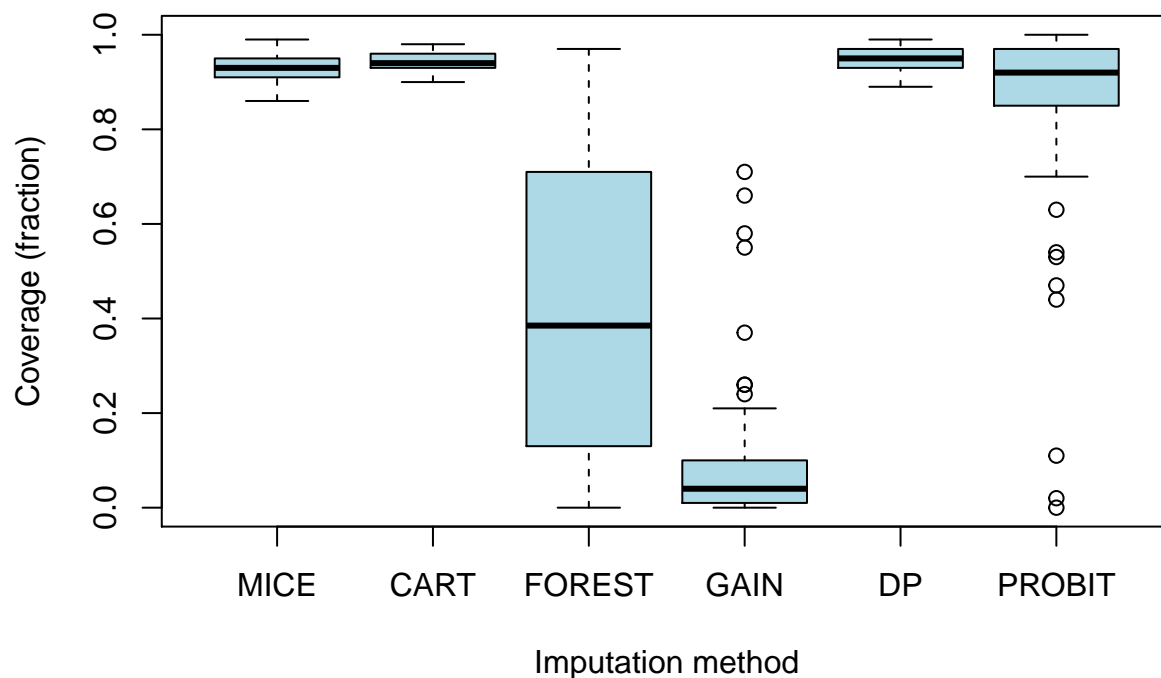

Coverage from different imputation methods: Bivariate pmf

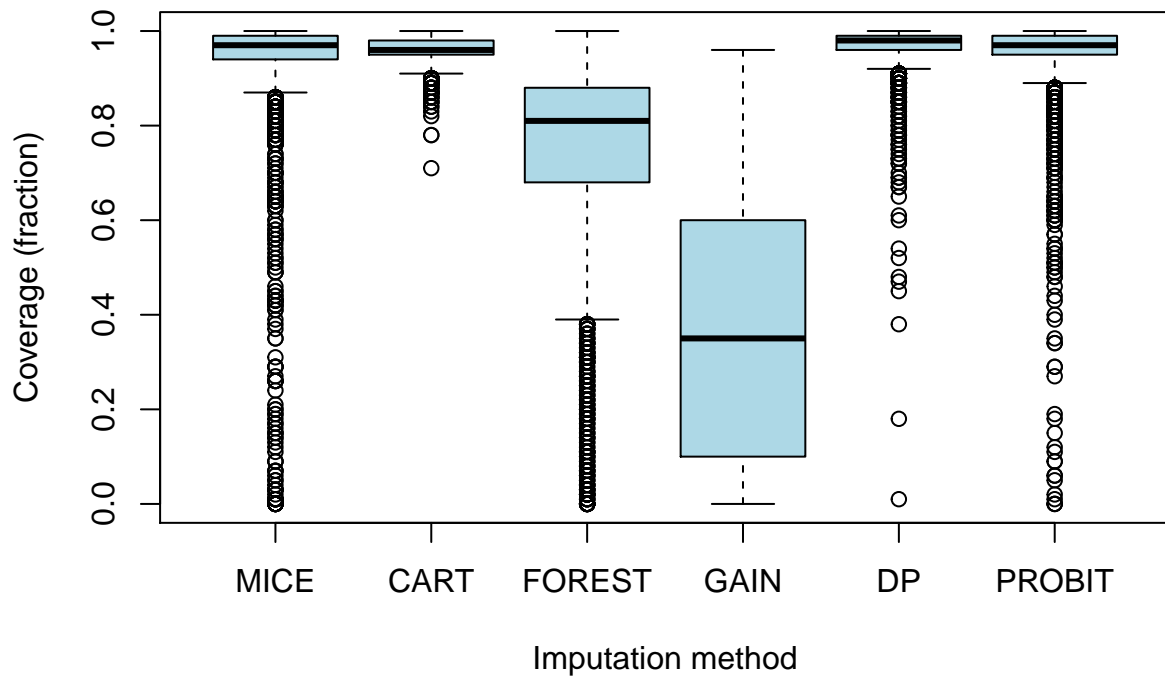

Coverage from different imputation methods: Trivariate pmf

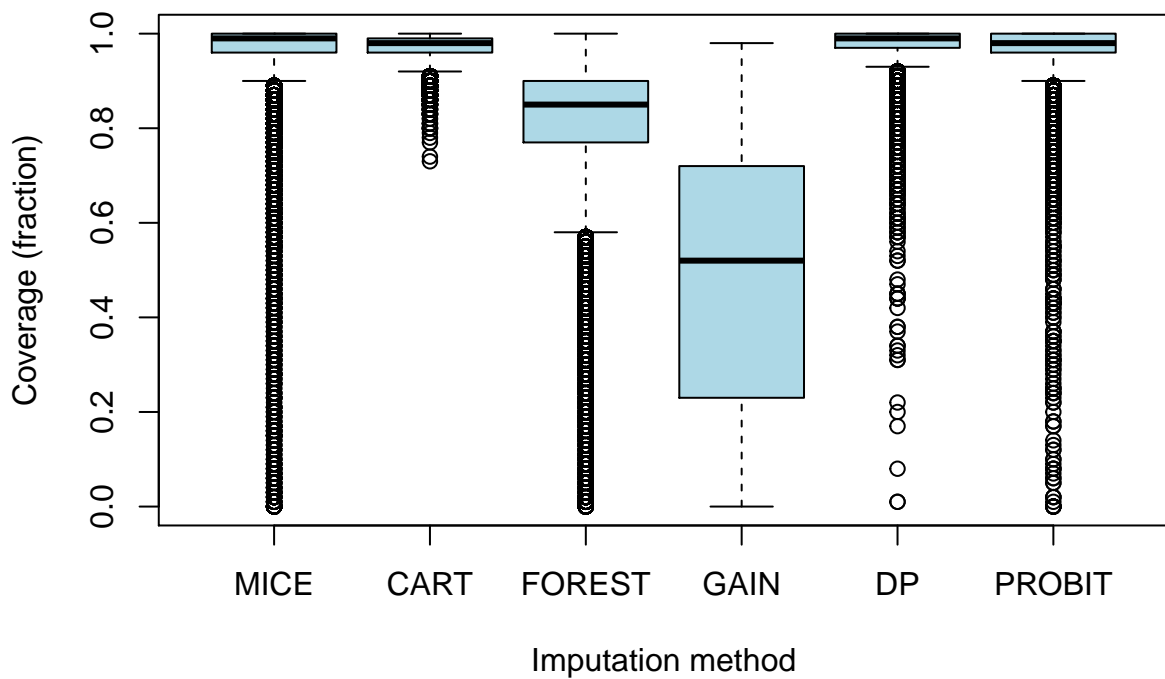

Coverage from different imputation methods: Quadvariate pmf

