

# MCAR 45% missing - DPMPM

```
# sample MCAR dataset from PUMS
source("../utils/sampleMCAR.R")
n = 10000
missing_col = c(1,3,7,9,10,11)
missing_prob = 0.45
set.seed(1)

output_list <- sampleMCAR(n, missing_prob)
df <- output_list[['df']]
df_observed <- output_list[['df_observed']]
```

## DPMPM

Multiple imputation using NPBayesImputeCat package

Ref: <https://cran.r-project.org/web/packages/NPBayesImputeCat/NPBayesImputeCat.pdf>

1. Create and initialize the Rcpp\_Lcm model object using CreateModel with the following arguments:

- X: dataframe to be imputed = df
- MCZ: dataframe with the definition of structural zero = NULL
- K: the maximum number of mixture components = 40
- Nmax: An upper truncation limit for the augmented sample size = 0
- aalpha: the hyper parameter alpha in stick-breaking prior = 0.25
- balpha: the hyper parameter beta in stick-breaking prior = 0.25
- seed = 0

2. Set the tracer for the sampling process

- k\_star: the effective cluster number
- psi: conditional multinomial probabilities
- ImputedX: imputation result

3. Run the model using the method Run of Rcpp\_Lcm class with the following arguments:

- burnin = 10000
- iter = 10000
- thinning = 5

4. Obtain result

```
N = 40
Mon = 10000
B = 10000
thin.int = 5

# 1. Create and initialize the Rcpp_Lcm model object
model = CreateModel(X = df_observed, MCZ = NULL, K = N, Nmax = 0,
                    aalpha = 0.25, balpha = 0.25, seed = 0)

# 2. Set tracer
model$SetTrace(c('k_star', 'psi', 'ImputedX', 'alpha'), Mon)

# 3. Run model using Run(burnin, iter, thinning)
model$Run(B, Mon, thin.int)
```

```

# Extract results
output <- model$GetTrace()
k_star <- output$k_star
psi <- output$psi
imputed_df <- output$ImputedX
alpha <- output$alpha


#retrieve parameters from the final iteration
result <- model$snapshot

#convert ImputedX matrix to dataframe, using proper factors/names etc.
ImputedX <- GetDataFrame(result$ImputedX,df)

```

Diagnostics


## Blocked Gibbs Sampling Assessment: VEH

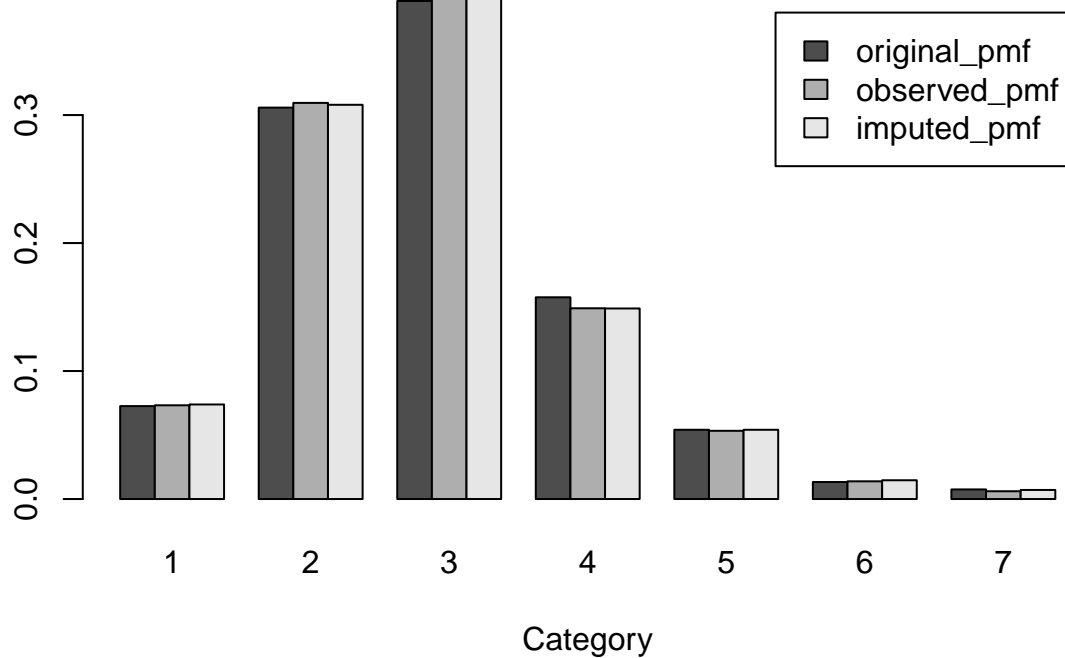


Assess bivariate joint distribution

Assess trivariate joint distribution


### Blocked Gibbs Sampling Assessment: NP

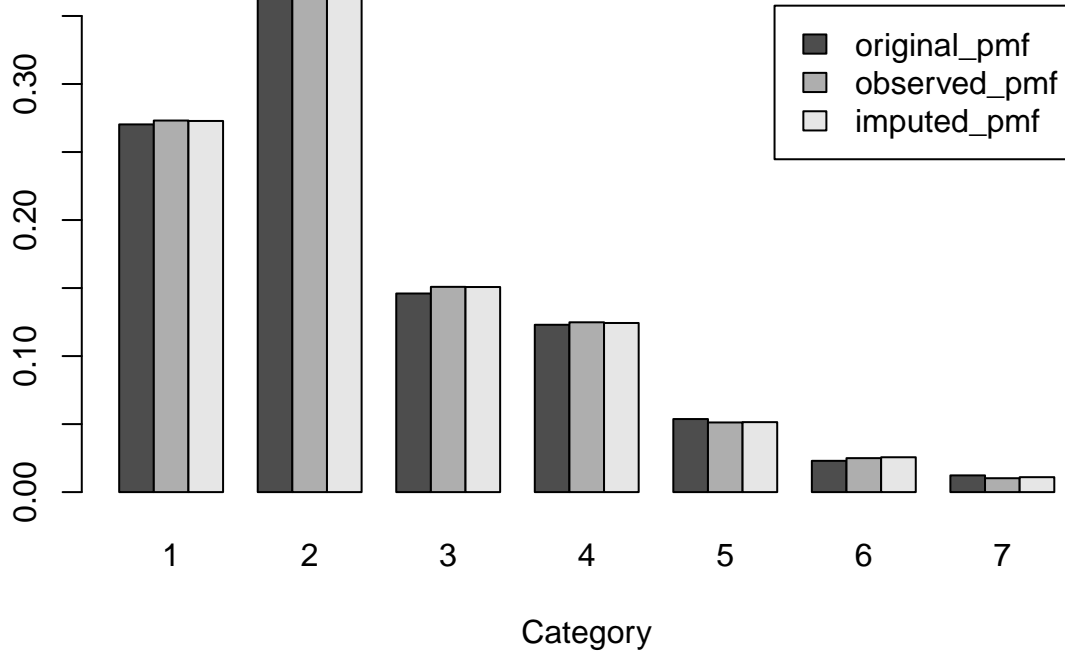


### Blocked Gibbs Sampling Assessment: SCHL

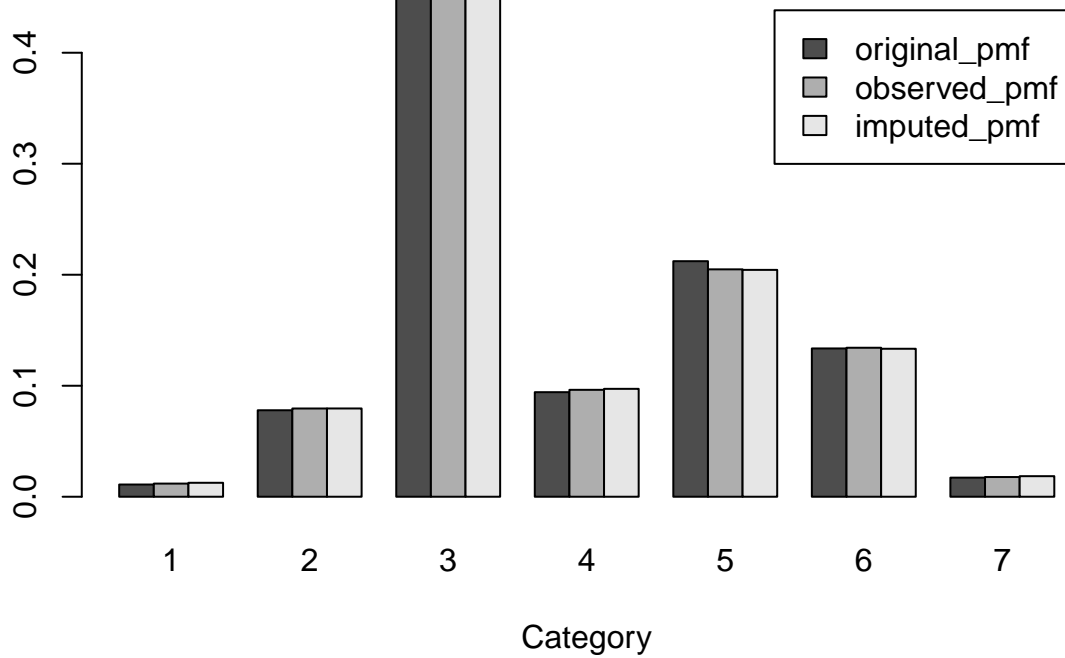


### Blocked Gibbs Sampling Assessment: AGEF

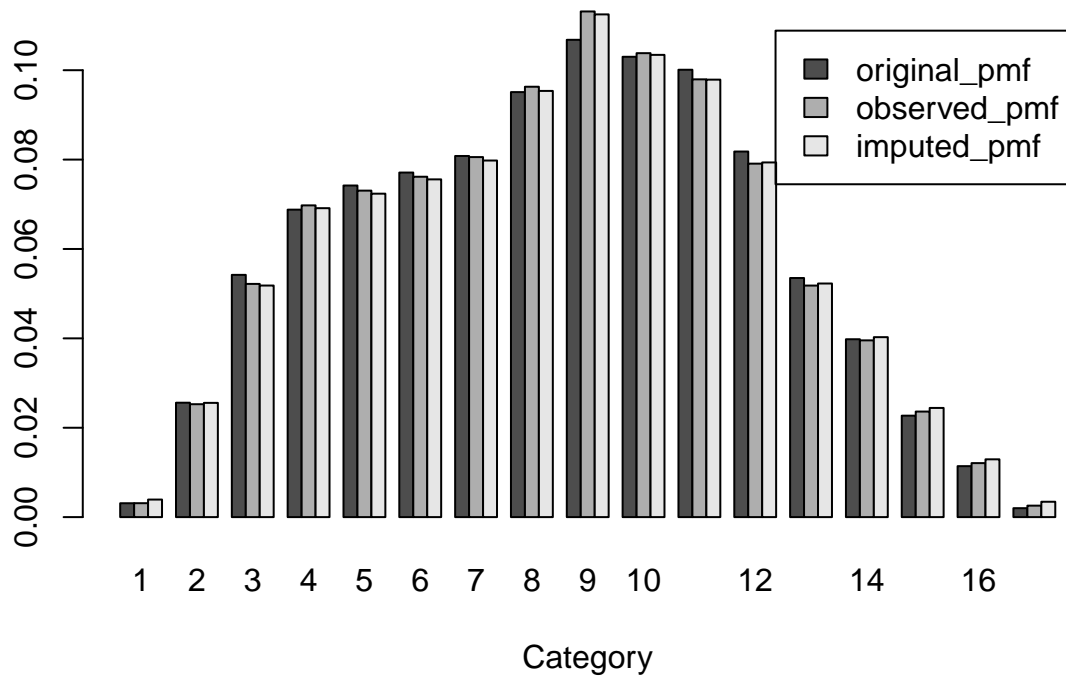


### Blocked Gibbs Sampling Assessment: WKL

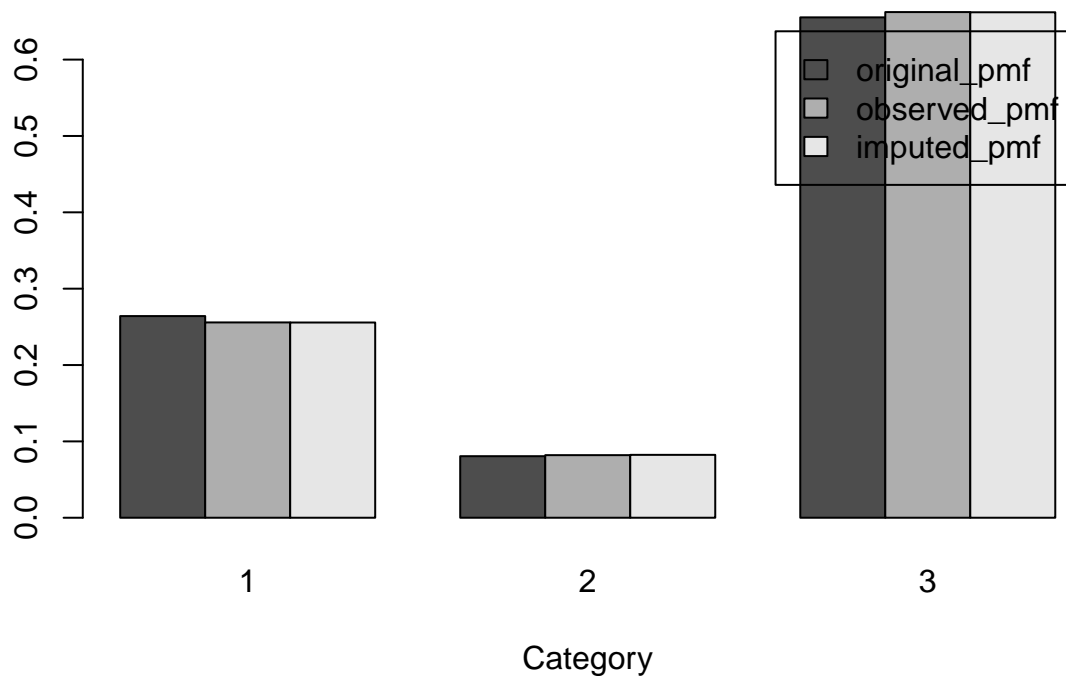



## Blocked Gibbs Sampling Assessment: PINCP

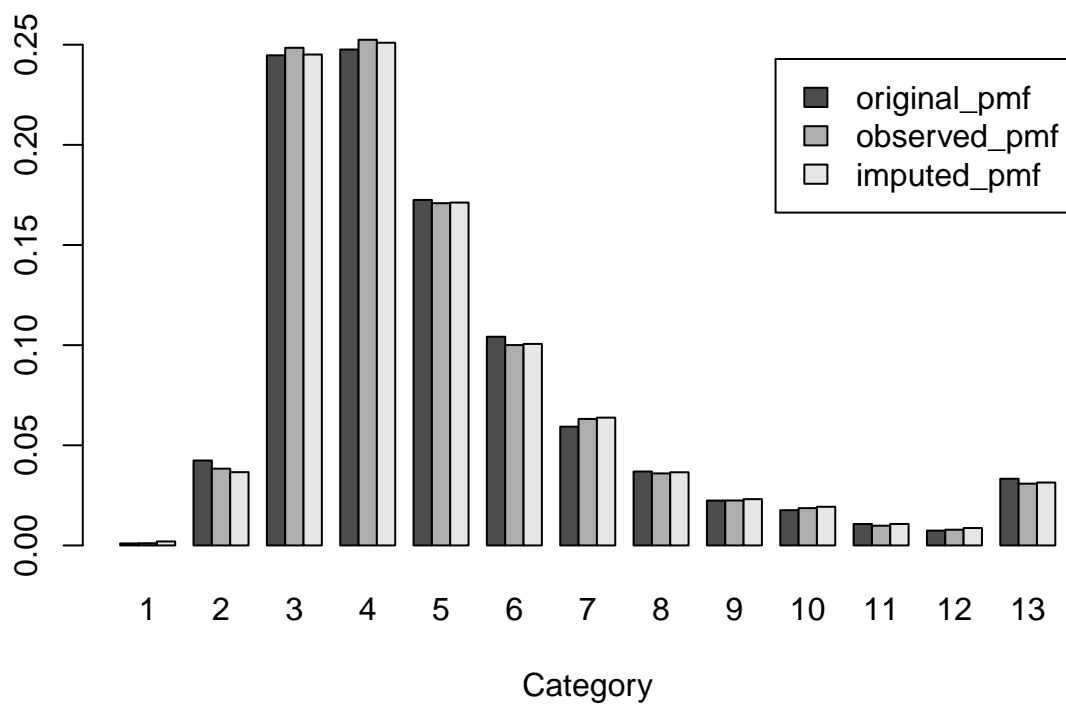


## Number of clusters used over time

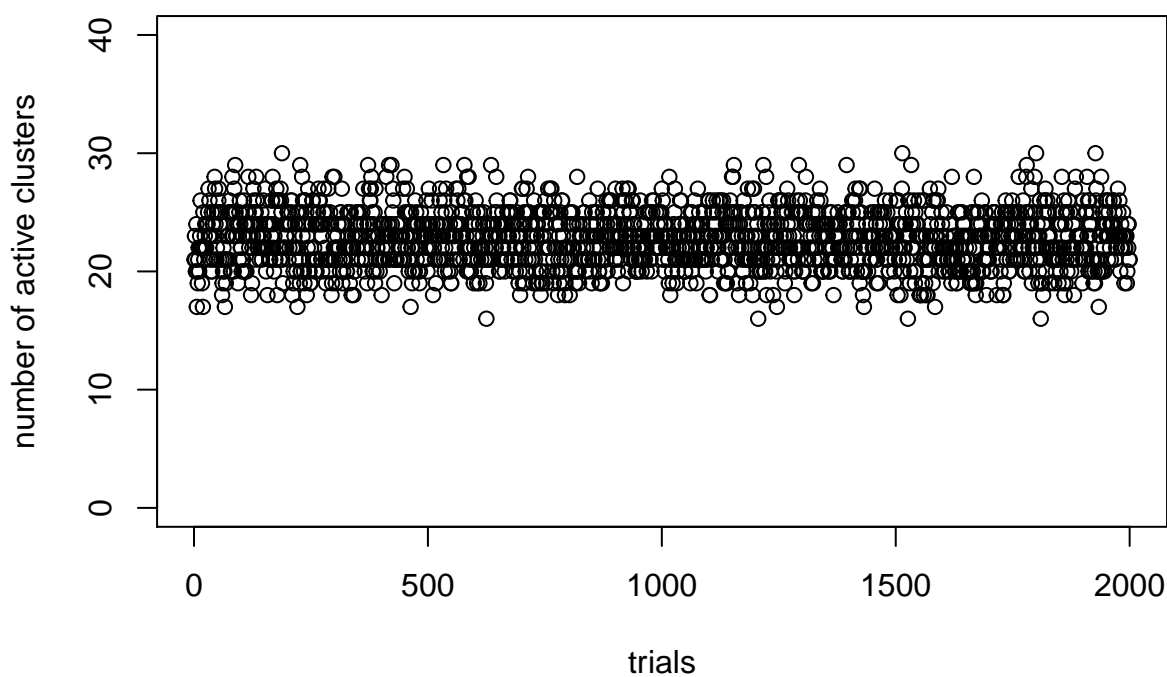

**alpha value for the stick breaking process**

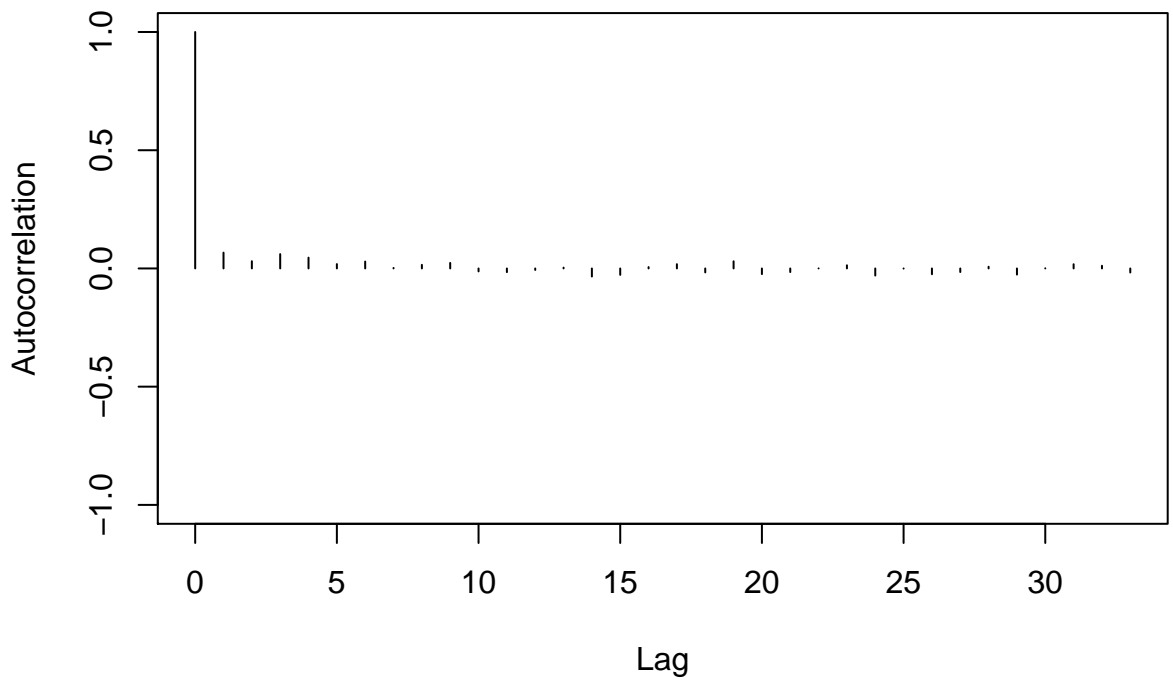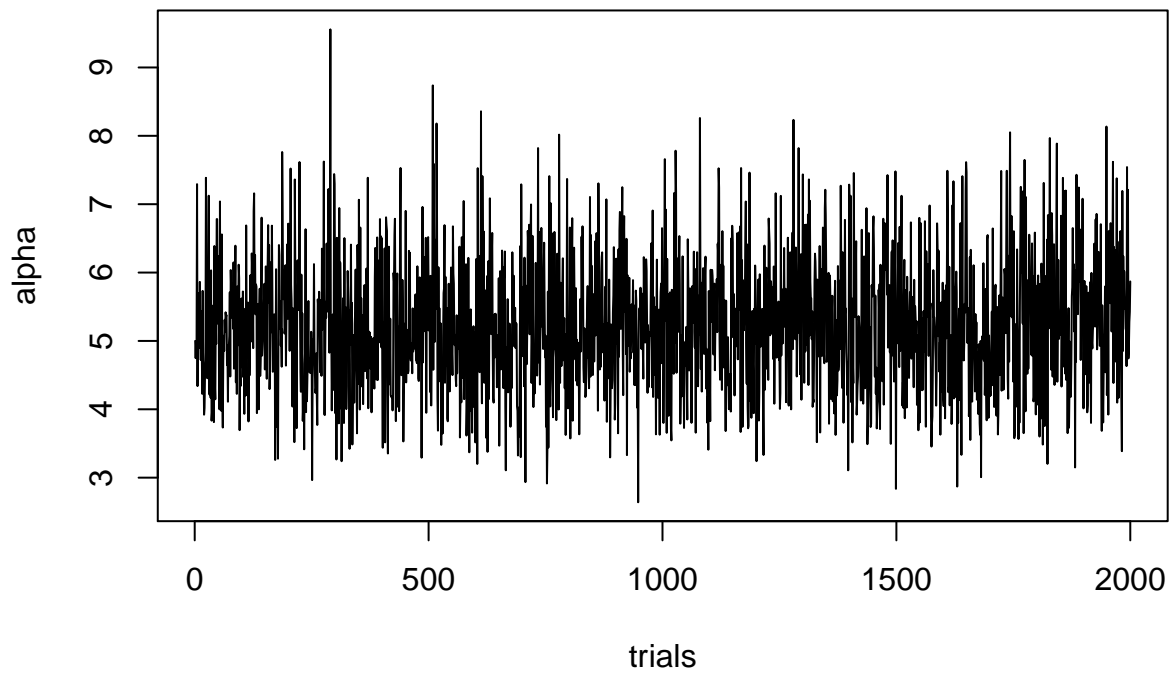

**Bivariate pmf**

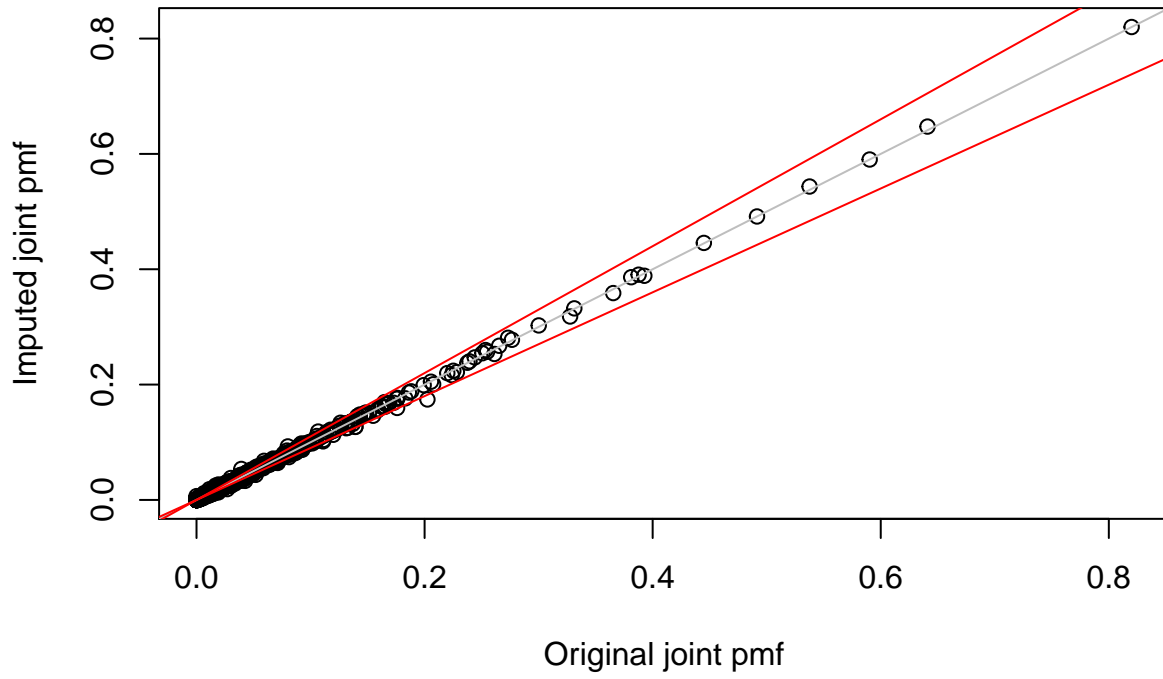

**Trivariate pmf**

