


WIA1005 Lab Task 3 Inter-VLAN Routing and DHCP (Week 10 – 5%)

In this activity, you need to configure all the devices and verify the network connectivity.

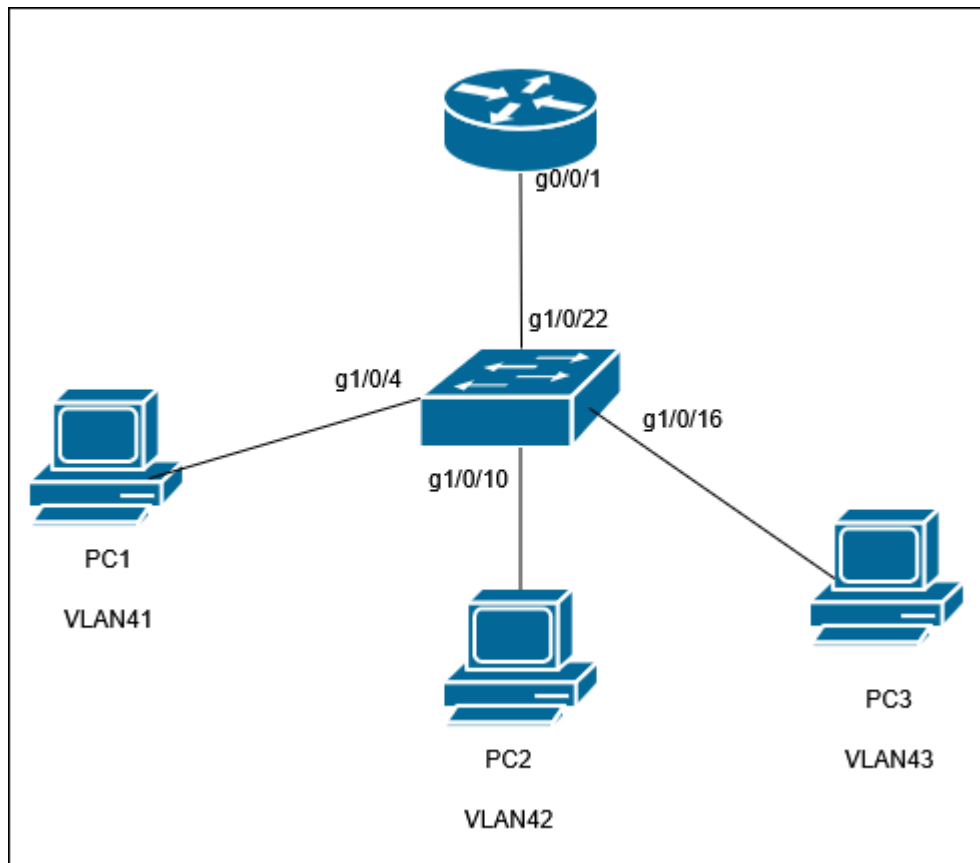

Duration : 1.5 hours

VLAN and IP Addressing Information

VLAN ID	Name	IPv4 Network Address	IPv6 Network Address
41	Lab-1	100.X.X.0/25	2001:X:X:X1::/64
42	Lab-2	100.X.X.128/27	2001:X:X:X2::/64
43	Lab-3	100.X.X.160/28	2001:X:X:X3::/64
XX	Management	100.X.X.176/29	2001:X:X:X4::/64

X is your Rack number, if you are Rack-8, X=8

IPv4

- Assign first host to the Router for VLAN41, 42 and 43.
- PC1 - Static IP (Assign third host to PC1)
- PC2 and PC3 – DHCP
 - Exclude the first 6 IP of VLAN42 and 43 for special purpose.

IPv6

- Assign interface ID ::1 to the Router, and ::2 to the PC for VLAN41, 42 and 43.

VLAN XX is native VLAN

- IPv4 - Assign first host to the Switch and last host to the Router
- IPv6 - Assign interface ID ::1 to the Router, and ::2 to the Switch
- Ensure all devices can ping each other.
- Ensure all group members understand the configuration tasks.