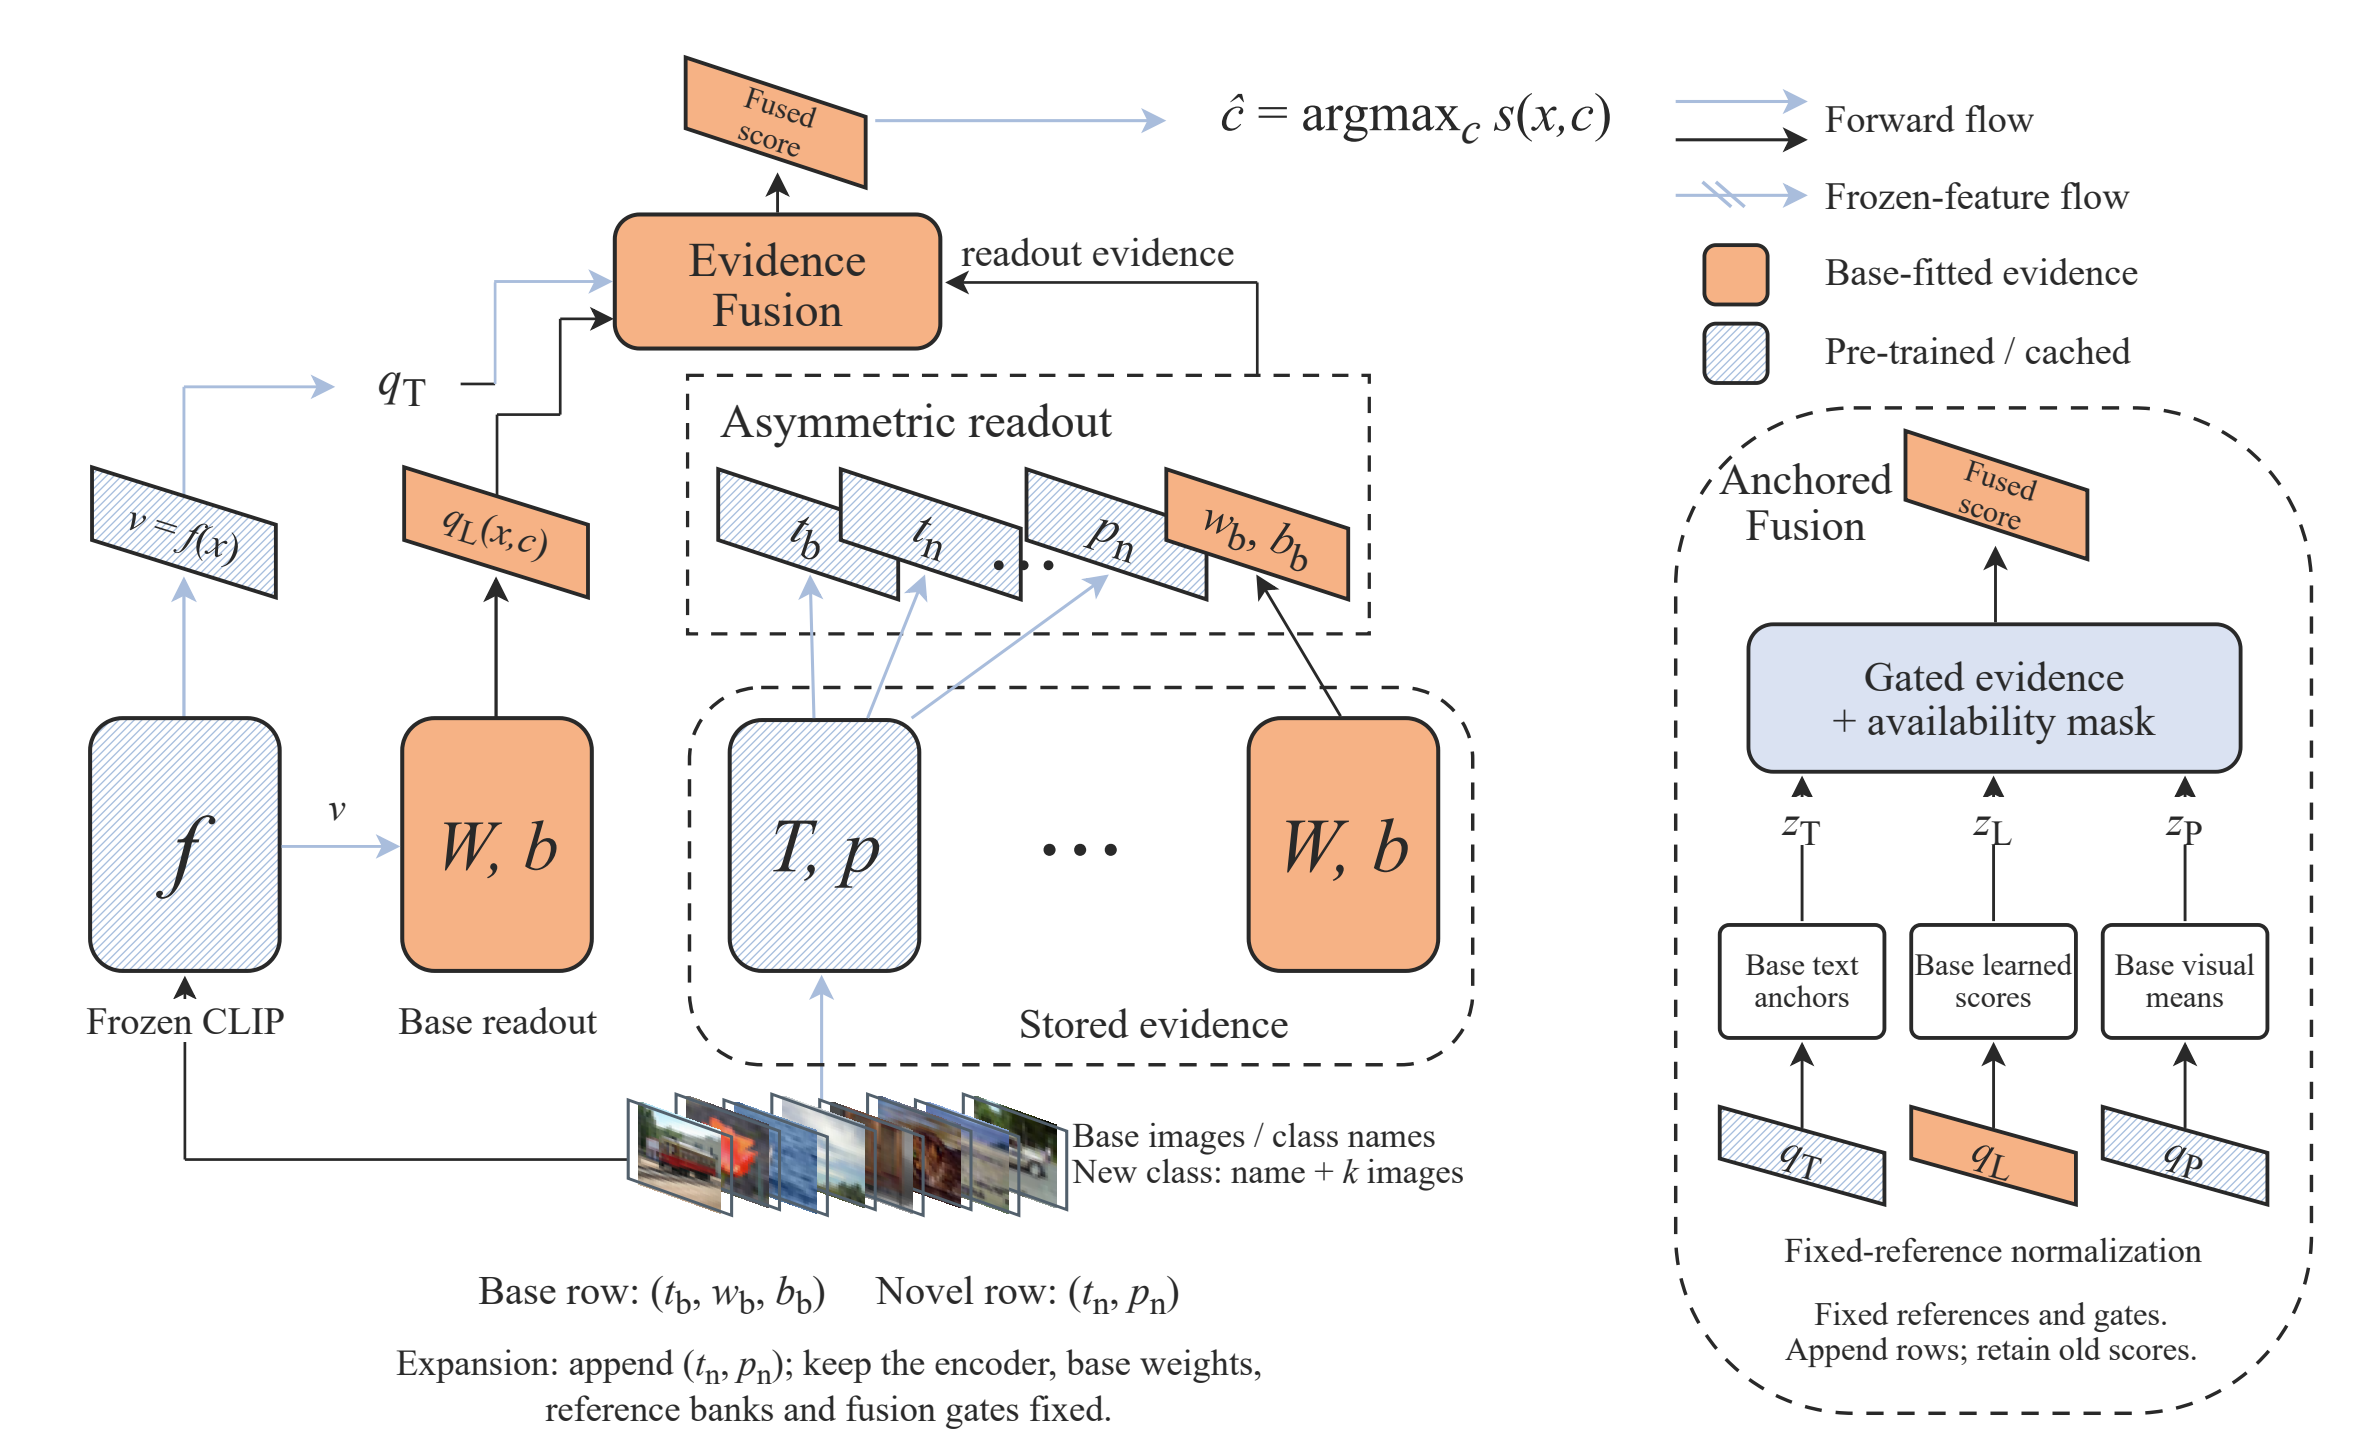

Fused score
$\hat{c} = \mathrm{argmax}_c\, s(x,c)$
Forward flow
Frozen-feature flow
Base-fitted evidence
Pre-trained / cached
Evidence Fusion
readout evidence
q_T
Asymmetric readout
$v = f(x)$
$q_L(x,c)$
t_b
t_n
p_n
w_b, b_b
f
v
W, b
T, p
W, b
Frozen CLIP
Base readout
Stored evidence
Base images / class names
New class: name + k images
Base row: (t_b, w_b, b_b) Novel row: (t_n, p_n)
Expansion: append (t_n, p_n); keep the encoder, base weights, reference banks and fusion gates fixed.
Anchored Fusion
Fused score
Gated evidence + availability mask
z_T
z_L
z_P
Base text anchors
Base learned scores
Base visual means
q_T
q_L
q_P
Fixed-reference normalization
Fixed references and gates.
Append rows; retain old scores.