FCS Research Article — Working Draft

RESEARCH ARTICLE

Retention-constrained class expansion with reference-anchored candidate tables

Junyi Zhang[1]

1. Shandong University, China

Received not submitted; accepted not assigned
E-mail: cheerssom0876@gmail.com.
Working draft, October 21, 2026

Abstract

Expandable recognition must admit new categories while meeting an explicit accuracy requirement on the original classes. We study how much novel recognition a retained base classifier enables under this constraint, and how its contribution evolves across successive class arrivals. Reference-anchored candidate tables combine trained base columns with semantic anchors and novel visual prototypes in a fixed score system. Branch mixtures are calibrated using base-only pseudo-expansion episodes. A matched-retention analysis then measures novel accuracy at a common base-test constraint, while a separate base-validation policy selects operational admission thresholds. On CIFAR-100, matching base accuracy at approximately 83.48% gives 75.79% novel accuracy, compared with 61.36% after removing and recalibrating the learned branch and 74.43% for anchored text–prototype fusion. On Oxford-IIIT Pets, a stricter base requirement of approximately 96.84% gives 90.99% novel accuracy versus 84.00% for dense prototype fusion. Across five CIFAR arrival sessions, retaining the classifier adds 2.18 percentage points in average incremental accuracy and 1.75 points in final accuracy over the recalibrated classifier-free alternative. Paired ablations and complete retention frontiers quantify where learned discrimination supplies additional novel-admission capacity. The formulation makes the practical value of preserving a classifier measurable as the class vocabulary grows.

Keywords

Long-tailed recognition; Class expansion; Retention constraints; Vision–language models; Incremental recognition; Evidence fusion

1 Introduction

Recognition systems often acquire new categories after deployment, while the original classifier has been fitted to imbalanced supervision. Long-tailed recognition addresses the unequal evidence available to common and rare classes [1–3]. Class expansion must put that learned discrimination to work alongside the names and sparse examples supplied for arriving categories.

Pre-trained vision–language models provide a shared interface for this evidence. CLIP maps images and descriptions into an embedding space [4]; prompt adaptation and lightweight fine-tuning specialize its predictions [5–7]; caches and prototypes incorporate labeled support [8–10]. An expanded classifier can therefore retain trained base columns and append semantic anchors and prototypes for novel classes.

The practical criterion is novel recognition under a stated base-accuracy requirement. Fixing this requirement identifies how much new-class recognition the system can admit while preserving its established service level. Successive class arrivals introduce a second criterion: the paired gain obtained by retaining the base-trained classifier throughout the sequence. Separating a fixed-gate removal from a recalibrated classifier-free alternative measures both the contribution of the stored learned evidence and its value after calibration is restored.

We address these criteria with *reference-anchored candidate tables*. Each class stores the evidence available to it, and each branch normalizes its scores against fixed base-class references. The table retains the original learned columns and appends new rows without refitting them. This reference frame makes the existing scores independent of vocabulary size, allowing the novel admission threshold to be analyzed separately from within-group discrimination.

Class-incremental learning studies retention of earlier knowledge [11, 12], and pre-trained prototypes and analytic readouts enable efficient class addition [13, 14]. Our evaluation asks what a retained classifier contributes under a common base constraint and across repeated arrivals. A score-preservation proposition supplies the mechanism; matched-retention frontiers and paired sequential comparisons supply the recognition evidence.

On CIFAR-100, a common base accuracy of approximately 83.48% gives 75.79% novel accuracy with retained learned columns, 61.36% with a recalibrated classifier-free readout, and 74.43% with dense anchored text–prototype fusion. On Pets, the 99% retention budget gives approximately 96.84% base accuracy and 90.99% novel accuracy, compared with 84.00% novel accuracy for dense fusion. Five-session CIFAR expansion yields a further 2.18point average incremental gain over the recalibrated classifier-free alternative. All branch mixtures are selected on base-only calibration episodes; common-test-constraint

frontiers and validation-selected operational thresholds are reported separately.

The contributions are a retention-constrained formulation of class expansion, a reference-anchored table that reuses the original classifier with heterogeneous arriving evidence, and a paired evaluation that quantifies novel recognition and sequential classifier value under explicit base-accuracy requirements.

2 Related work

2.1 Long-tailed recognition and calibration

Long-tailed recognition addresses the bias induced by unequal class frequencies. Margin adjustment allocates different classification margins to frequent and rare classes [2]; class-balanced weighting uses effective sample counts [3]; and prior-aware objectives modify the relationship between logits and class probabilities [15,16]. Representation–classifier decoupling provides a complementary route: a representation is learned first and a balanced classifier is then fitted to that representation [17]. These developments motivate our use of a balanced base classifier as one source of evidence.

Foundation models change the representation-learning budget and the role of task-specific adaptation. LIFT studies lightweight adaptation of pre-trained models for long-tail learning [7]. Low-rank updates provide an efficient mechanism for adapting large parameter matrices [18], including transformer backbones [19]. Our candidate interface can accept weights obtained through these routes. The expansion experiments here fix the encoder throughout and isolate the effect of the readout.

Long-tailed calibration studies confidence under class imbalance [20], while robust long-tailed learning addresses its interaction with label noise [21]. We study the reference population used to standardize evidence as candidate classes change. Class-balanced validation and separate base/novel metrics expose how the resulting score system allocates discrimination.

2.2 Semantic and visual evidence for few-shot recognition

CLIP constructs classifiers from natural-language supervision and supports classification by changing the text candidates [4]. CoOp learns prompt context for target tasks, while CoCoOp introduces conditional prompting to improve transfer across categories [5,6]. These methods concern the construction or adaptation of semantic evidence. Our table keeps semantic anchors available to every class and combines them with evidence that may exist for only a subset of the vocabulary.

Prototype methods summarize class examples in an embedding space [9]. SimpleShot studies feature normalization for nearest-neighbor classification [10], and Tip-Adapter augments CLIP with a support-feature cache [8]. Few-shot transfer under distribution shift further motivates separating shared and task-specific knowledge [22]. Our comparisons use a shared encoder and novel support budget to examine evidence availability and its normalization reference.

2.3 Incremental recognition with pre-trained models

Class-incremental learning evaluates a model on the union of classes observed across successive training stages. Exemplar rehearsal and representation constraints are established tools for retaining earlier knowledge [11]. Few-shot class-incremental learning adds a data scarcity condition to the arriving classes [12]. Recent FCS work studies temporal consistency with unlabeled memory replay [23] and the geometry of inter-task and intra-task discrimination [24]. These approaches motivate explicit measurement of existing-class behavior.

SimpleCIL examines prototype classifiers built from pre-trained representations [13]; RanPAC combines random projections with accumulated class statistics [14]. Reference-anchored fusion extends this setting to semantic, trained, and support-derived evidence with different availability patterns. Calibrated seen/unseen recognition [25] provides a related perspective on the base–novel operating trade-off.

TV100 studies categories unavailable during CLIP's original pre-training period [26]. Here, novelty is defined relative to task-specific classifier fitting and calibration; CLIP retains its web-scale pre-training exposure.

3 Expandable recognition with heterogeneous evidence

3.1 Problem definition

Let $\mathcal{B}$ denote base classes with a labeled training set $\mathcal{D}_B$, and let $\mathcal{N}$ denote novel classes supplied at expansion time. The active vocabulary is initially $\mathcal{C}_0 = \mathcal{B}$ and subsequently becomes $\mathcal{C} = \mathcal{B} \cup \mathcal{N}$. An image encoder f maps an input image to a normalized vector $v = f(x) \in \mathbb{R}^D$. A text encoder supplies a normalized class anchor t_c. For each $c \in \mathcal{N}$, the support set $\mathcal{S}_c$ contains k labeled examples. Inference is over all active classes, without an oracle indicating whether an image belongs to a base or novel class.

Base training can be imbalanced. If n_c is the number of training images for class c, the classifier may use inverse-frequency weights or another balanced fitting procedure. After this stage, the encoder, base classifier, reference banks, and branch mixing coefficients are fixed. The group admission offset is either frozen or calibrated on base validation to enforce a retention target. At arrival, novel class information is restricted to its name and $\mathcal{S}_c$. Neither previous training images nor additional labeled novel validation images are required to construct its row.

Each row has an availability mask $m_{ec} \in \{0, 1\}$ over evidence sources e. We use semantic evidence T, learned discriminative evidence L, and visual prototype evidence P. The experimental configuration is

$$(m_{Tc}, m_{Lc}, m_{Pc}) = \begin{cases} (1, 1, 0), & c \in \mathcal{B}, \\ (1, 0, 1), & c \in \mathcal{N}. \end{cases} \tag{1}$$

Base prototypes form the visual branch's normalization references. The availability mask determines which evidence contributes to a candidate; the reference bank determines its scale.

3.2 Three notions of preservation

Preserving a parameter vector θ means that θ receives no update during expansion. Preserving a score additionally requires

$$s_{\mathcal{C}_0}(x, c) = s_{\mathcal{C}}(x, c), \quad c \in \mathcal{C}_0. \tag{2}$$

Preserving a prediction requires the maximizing class over the larger vocabulary to remain the same. The third property is stronger than the

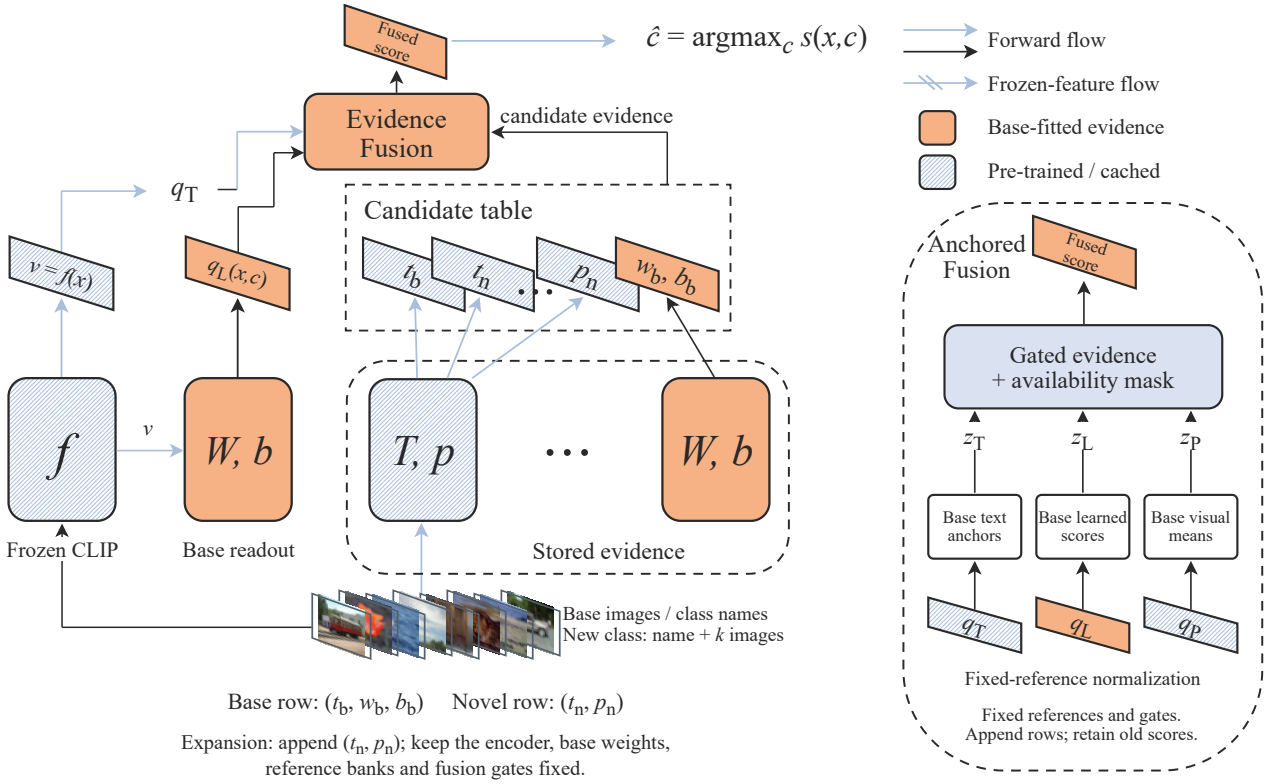


Fig. 1 Reference-anchored candidate-table architecture. A shared frozen CLIP feature supplies semantic similarity and the base-trained readout. The candidate table stores text anchors for all classes, learned weights for base classes, and support prototypes for arriving classes. The inset shows the three evidence branches normalized against their respective fixed base reference sets before availability-masked fusion; $z_e = \widehat{q}_e$ denotes normalized evidence. A novel row is appended without updating the encoder, existing weights, references, or gates. Orange identifies base-fitted evidence and fusion; blue hatching identifies pre-trained or cached evidence. Branch gates remain fixed; retention control can adjust the separate novel admission offset.

second: a newly admitted class can have a larger score than the previous winner. We seek score preservation while allowing that competition.

The evaluation separates changes among existing classes from selection of an appended class. Under fixed evidence, reference anchoring preserves existing-class competition and admits new alternatives through their own scores.

4 Reference-anchored candidate tables

4.1 Evidence construction

The semantic score is cosine similarity between a normalized image feature and a class text anchor,

$$q_T(x, c) = v^\top t_c. \tag{3}$$

We average normalized text embeddings of eight fixed prompts and normalize the result. The same prompts construct anchors for base and arriving classes.

The learned score is the output of a base classifier,

$$q_L(x, c) = v^\top w_c + b_c, \quad c \in \mathcal{B}. \tag{4}$$

For the frozen-encoder experiments, the weights are fitted using class-balanced ridge regression. With augmented image features $\widetilde{v} = [v; 1]$, one-hot targets Y, and diagonal sample-weight matrix Ω, the solution is

$$W = (X^\top \Omega X + \lambda R)^{-1} X^\top \Omega Y, \tag{5}$$

where $R = \text{diag}(1, \ldots, 1, 0)$ leaves the intercept unregularized. A sample from class c has weight $1/n_c$, giving each base class equal total fitting weight. We solve the corresponding linear system.

The visual prototype of a novel class is

$$p_c = \frac{\sum_{x \in \mathcal{S}_c} f(x)}{\| \sum_{x \in \mathcal{S}_c} f(x) \|_2}, \qquad q_P(x, c) = v^\top p_c. \tag{6}$$

The same averaging rule applied to base training features produces a reference bank $\{p_b : b \in \mathcal{B}\}$. The novel prototype stores the information acquired at class arrival; the base bank fixes the coordinate system in which its score is interpreted.

4.2 Why a changing normalization population matters

Candidate-wise standardization computes the mean and standard deviation over the current valid candidates of a branch. For text evidence, this gives

$$z_T^C(x, c) = \frac{q_T(x, c) - \mu_T(x; C)}{\max(\sigma_T(x; C), \epsilon)}. \tag{7}$$

Adding candidates changes μ_T and σ_T. For a text-only classifier, a common positive affine transformation preserves the ordering of the

old classes. With heterogeneous fusion, however, the learned branch and text branch are rescaled differently. The relative strength of their votes can change.

A two-class example illustrates the effect. Suppose the old text scores are $(0, 2)$, giving standardized scores $(-1, 1)$, while the learned branch contributes $(0.25, -0.25)$. The second old class has the larger fused score. Appending a text score of 100 changes the two old standardized scores to approximately $(-0.728, -0.685)$. Their text separation is now about 0.043, and the unchanged learned contribution reverses the old-class ordering. No classifier weight has changed. The example isolates a normalization effect independently of whether the new class ultimately wins the expanded decision.

4.3 Fixed references for each evidence source

Let $\mathcal{R}_e$ be a fixed bank of reference rows for source e. For every query, compute

$$\mu_e(x) = \frac{1}{|\mathcal{R}_e|} \sum_{r \in \mathcal{R}_e} q_e(x, r), \tag{8}$$

$$\sigma_e^2(x) = \frac{1}{|\mathcal{R}_e|} \sum_{r \in \mathcal{R}_e} (q_e(x, r) - \mu_e(x))^2. \tag{9}$$

The normalized candidate score is

$$\widehat{q}_e(x, c) = \frac{q_e(x, c) - \mu_e(x)}{\max(\sigma_e(x), \epsilon)}. \tag{10}$$

The reference statistics remain query-dependent, which adapts the scale to the current image, but are independent of which novel candidates are active. We use base text anchors for $\mathcal{R}_T$, base classifier columns for $\mathcal{R}_L$, and base visual means for $\mathcal{R}_P$. Each bank contains 40 reference classes on CIFAR-100 and 15 on Pets. A zero-variance reference bank uses the same fixed denominator floor $\epsilon = 10^{-6}$.

The candidate score combines available normalized evidence:

$$s(x, c) = \sum_{e \in \{T, L, P\}} m_{ec} \alpha_e \widehat{q}_e(x, c) + \delta_c. \tag{11}$$

We set $\alpha_T = 1$, write $a = \alpha_L$ and $u = \alpha_P$, and use $\delta_c = d\,\mathbf{1}[c \in \mathcal{N}]$. The resulting implementation is

$$s(x, b) = \widehat{q}_T(x, b) + a\widehat{q}_L(x, b), \quad b \in \mathcal{B}, \tag{12}$$

$$s(x, n) = \widehat{q}_T(x, n) + u\widehat{q}_P(x, n) + d, \quad n \in \mathcal{N}. \tag{13}$$

The offset d calibrates competition between base and novel classes. The availability mask excludes absent learned evidence from the novel score and from reference statistics.

4.4 Score preservation under append-only expansion

Proposition 1. Fix an input x, the evidence of every existing row, the encoder, the reference banks, the denominator floor, and the coefficients in Eq. (11). Appending new rows leaves the score of every existing row unchanged. Hence, every pairwise score difference and the maximizing row restricted to the existing vocabulary are unchanged, using a fixed tie-breaking rule.

Proof. For an existing candidate c, each raw score $q_e(x, c)$ and mask m_{ec} is fixed. The means and variances in Eq. (9) are functions of x and $\mathcal{R}_e$, and neither depends on the appended rows. Therefore each normalized score in Eq. (10) is unchanged. The coefficients and offset of c are fixed, so their sum is unchanged. Subtracting the unchanged scores of any two existing rows gives an unchanged difference. A fixed tie-breaking rule preserves the maximizing existing row. □

The proposition covers both base rows and previously appended novel rows with fixed prototypes. The implementation computes the fixed base text block separately from novel columns to keep its numerical kernel independent of the appended width.

Corollary 1. If every existing row has a preserved score, a changed final prediction after expansion must select an appended row. An example whose previous prediction was incorrect cannot become correct after adding classes when its true class belongs to the existing vocabulary.

Proof. The best existing row is unchanged by Proposition 1. The expanded maximizer is either this row or a newly appended row. For an example labeled by an existing class, selecting a new row cannot correct a previous error, and keeping the existing maximizer leaves the previous error unchanged. □

4.5 Base-only calibration

Fusion calibration must respect the distinction between base supervision and novel support. We construct a pseudo-expansion episode by splitting the base classes into approximately equal pseudo-base and pseudo-novel groups: 20/20 on CIFAR-100 and 7/8 on Pets. A separate classifier is fitted using the pseudo-base classes alone. The pseudo-novel rows contain names and k support examples from those base classes, while held-out base validation images supply query labels. This episode simulates missing learned evidence without consuming any actual novel-class validation labels.

For each support budget, candidate coefficients are evaluated on this episode. The selection objective is the harmonic mean of macro accuracy on the two groups,

$$H = \frac{2A_B A_N}{A_B + A_N}, \tag{14}$$

with $H = 0$ if both terms vanish. The main experiment uses $a \in \{0, 0.25, 0.5, 1, 2\}$, $u \in \{0, 0.25, 0.5, 1, 2, 4\}$, and offsets $d \in [-4, 4]$ in steps of 0.25. Ties follow a fixed grid order. The full base classifier is then combined with actual novel rows using the selected coefficients. Neither actual novel validation queries nor test labels enter this selection rule.

This procedure uses one pseudo-class split per true partition and the same support-index seed as the evaluated support condition. The pseudo split seed is $100 + p$ for true-partition seed p. Coefficients are chosen once for a support budget and stay fixed when the vocabulary-size stress test appends successive subsets of novel classes.

4.6 Storage and computation

The frozen implementation uses one image feature per input. Class text anchors, base classifier weights, visual references, and novel prototypes are cached. For feature dimension D, the base reference banks require $O(|\mathcal{B}|D)$ storage; each novel row requires $O(D)$ additional storage for its prototype and text anchor. Once its support images have been encoded, constructing a novel prototype requires $O(kD)$ arithmetic and no optimization state.

Scoring K candidates requires $O(KD)$ arithmetic in addition to the fixed reference calculations. Image encoding is shared across the vocabulary, and existing row scores can be reused when appending candidates for the same query.

5 Experiments

5.1 Data, access conditions, and implementation

We evaluate expansion on CIFAR-100 [27] with long-tailed base supervision. The training class counts follow an exponential schedule with imbalance parameter $\rho = 100$ and nominal maximum 500 images. Five images per class are reserved before constructing the long-tailed pool, so the largest available pool contains 495 images. The remaining long-tailed pool contains 10,894 images, split into 10,487 fitting images and 407 held-out validation images. Validation reserves up to five examples per class, with smaller allocations for the rarest classes.

For seeds $\{0, 1, 2\}$, stratified sampling within head, medium, and tail frequency buckets yields distinct partitions of 40 base, 40 novel, and 20 unused classes. Proportional quotas use largest-remainder rounding after shuffling class membership. Evaluation uses the 80 base and novel classes.

Oxford-IIIT Pets [28] provides a complementary fine-grained task with 37 cat and dog breeds. We use its official trainval/test split and reserve five training images per breed as support. From the remaining training images, we construct an exponential long-tailed pool with $\rho = 10$ and maximum class count 90, giving 1,168 fitting and 146 validation images. Each true partition contains 15 base, 15 novel, and seven unused breeds, sampled with the same allocation rule. The official test split contains 3,669 images. Unlike CIFAR, its images have varied spatial resolutions; RGB images are resized to 224×224 by PIL bicubic interpolation before the same CLIP normalization. These features are freshly extracted for this study.

All expansion readouts use frozen CLIP ViT-L/14 features from a single 224×224 bicubic-resized image with CLIP channel normalization. Fitting, validation, and support pools are disjoint. Appendix C gives feature-cache and image-pool verification details.

Base ridge regularization is selected from $\{0.01, 0.1, 1, 10\}$ by base validation macro accuracy; the pseudo-base classifier uses the same rule. Novel support budgets are $k \in \{1, 2, 5\}$. One- and two-shot subsets use seeds $\{7, 8, 9\}$; five shots use the entire five-image reserve. We average support subsets within each partition and report the mean and sample standard deviation across the three distinct partitions.

Classifier fitting, regularization selection, and gate calibration use base classes exclusively. Five-shot CIFAR expansion consumes 200 support images for 40 novel classes. Its balanced test set supplies 4,000 base and 4,000 novel images for the expanded metrics.

5.2 Common-retention evaluation

The main comparisons use five support images per novel class. Four readouts share the frozen encoder, base fitting set, reference banks, class partitions, and novel support. The retained table scores base classes with text and learned columns and novel classes with text and support prototypes. Fixed-gate removal sets $a = 0$ and preserves the other coefficients. The recalibrated classifier-free readout selects its prototype coefficient and offset independently on the same pseudo episode. Dense anchored text–prototype fusion supplies prototypes for every class, including base means from the full fitting set. The retained model includes $a = 0$ in its calibration grid, and all models use the same prototype and offset grids.

Let $A_{B,\mathrm{ref}}^{\mathrm{closed}}$ be the retained table's accuracy with only base classes active. For each partition, every method receives the same absolute target $\tau_r = rA_{B,\mathrm{ref}}^{\mathrm{closed}}$, with $r \in \{0.80, 0.85, 0.90, 0.95, 0.99\}$. The matched-retention criterion is

$$N_r = \max_d A_N(d) \quad \text{subject to} \quad A_B(d) \geq \tau_r, \tag{15}$$

with the branch coefficients fixed after pseudo-episode calibration. Thus, the constraint is shared across methods and is never rescaled by a method's own accuracy ceiling.

Write $M_B(x)$ and $M_N(x)$ for the maximum base and novel scores before adding d. A query selects a novel class when $d > M_B(x) - M_N(x)$, with class-ID tie breaking. The base accuracy decreases monotonically as d increases. Sorting the margins of correctly classified base queries, weighted by $1/(|\mathcal{B}|n_c^{\mathrm{query}})$ for class c, identifies the largest admissible offset. A target above the within-base accuracy ceiling is recorded as infeasible. The largest measured target overshoot across all methods and arrival sessions is 0.023 percentage points on CIFAR and 0.076 on Pets.

Two evaluations use this criterion. The *matched-test-retention frontier* uses base test labels to characterize recognition capacity at a common test constraint; this descriptive threshold sweep is separate from deployment calibration. The *base-validation policy* chooses the threshold from actual base validation examples and applies it to test queries without using actual novel validation or test labels. Its target uses the closed-base validation accuracy, and both resulting test group accuracies are reported. This policy can adjust d at each arrival while retaining the encoder, learned columns, references, and branch coefficients. The append-only proposition applies when the offset is fixed as well.

5.3 Novel recognition at a common base accuracy

Figure 2 and Table 1 quantify the admission capacity associated with the retained classifier. At the CIFAR 95% budget, all four methods achieve approximately 83.48% base accuracy. Retained learned columns support 75.79% novel accuracy, with paired gains of 14.43 ± 6.59 points over the recalibrated classifier-free readout and 1.37 ± 3.37 points over dense anchored text–prototype fusion. Removing the learned contribution while keeping the other gates fixed gives 57.98%

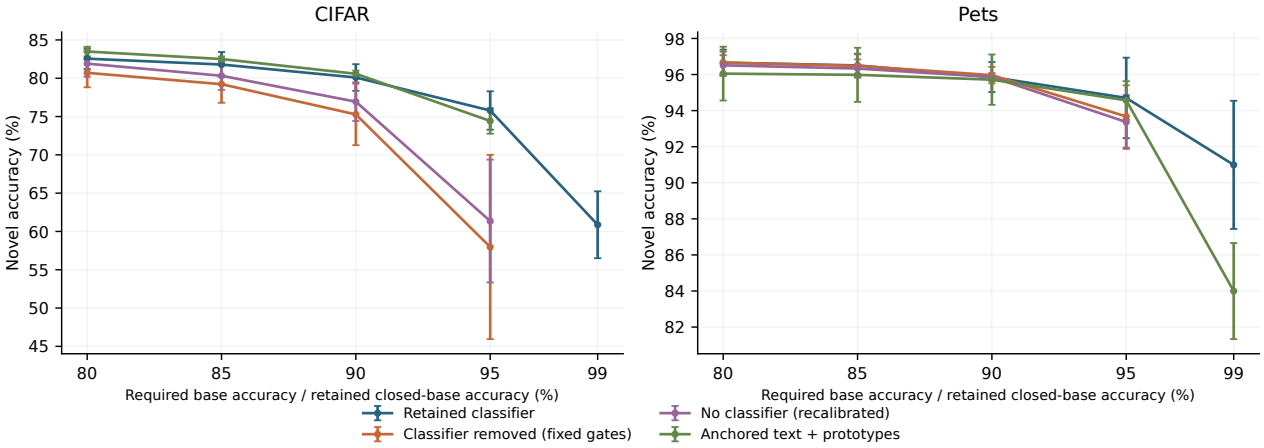


Fig. 2 Novel recognition at shared base-test retention budgets after the fifth arrival. Every method receives the same partition-specific target $r A_{B,\mathrm{ref}}^{\mathrm{closed}}$. Branch mixtures are base-only calibrated; the offset sweep is a descriptive matched-test analysis. Curves show mean ± sample standard deviation over three partitions. A point is drawn when all three partitions are feasible.

Table 1 Matched-retention recognition after five arrivals. Base and novel values are percentages, mean ± sample standard deviation over feasible partitions after averaging arrival orders. Budgets are shared within each partition; feasible counts identify available comparisons. Means with different feasible counts refer to different partition sets. The complete five-budget frontier is provided in the experimental records.

Data	Budget	Readout	Base	Novel	Feasible
CIFAR	90%	Retained classifier	79.09 ± 0.49	80.10 ± 1.74	3/3
CIFAR	90%	Classifier removed (fixed gates)	79.09 ± 0.49	75.28 ± 4.01	3/3
CIFAR	90%	No classifier (recalibrated)	79.09 ± 0.49	76.94 ± 2.52	3/3
CIFAR	90%	Anchored text + prototypes	79.09 ± 0.49	80.58 ± 0.41	3/3
CIFAR	95%	Retained classifier	83.48 ± 0.53	75.79 ± 2.50	3/3
CIFAR	95%	Classifier removed (fixed gates)	83.48 ± 0.53	57.98 ± 12.03	3/3
CIFAR	95%	No classifier (recalibrated)	83.48 ± 0.53	61.36 ± 8.02	3/3
CIFAR	95%	Anchored text + prototypes	83.48 ± 0.53	74.43 ± 1.67	3/3
CIFAR	99%	Retained classifier	87.00 ± 0.54	60.88 ± 4.37	3/3
CIFAR	99%	Classifier removed (fixed gates)	–	–	0/3
CIFAR	99%	No classifier (recalibrated)	–	–	0/3
CIFAR	99%	Anchored text + prototypes	86.88 ± 0.71	38.26 ± 2.46	2/3
Pets	90%	Retained classifier	88.07 ± 2.07	95.86 ± 0.83	3/3
Pets	90%	Classifier removed (fixed gates)	88.04 ± 2.05	95.97 ± 0.46	3/3
Pets	90%	No classifier (recalibrated)	88.05 ± 2.05	95.86 ± 0.22	3/3
Pets	90%	Anchored text + prototypes	88.05 ± 2.06	95.72 ± 1.39	3/3
Pets	95%	Retained classifier	92.93 ± 2.16	94.70 ± 2.23	3/3
Pets	95%	Classifier removed (fixed gates)	92.95 ± 2.18	93.68 ± 1.73	3/3
Pets	95%	No classifier (recalibrated)	92.93 ± 2.21	93.37 ± 1.49	3/3
Pets	95%	Anchored text + prototypes	92.94 ± 2.17	94.57 ± 1.06	3/3
Pets	99%	Retained classifier	96.84 ± 2.30	90.99 ± 3.55	3/3
Pets	99%	Classifier removed (fixed gates)	98.14 ± 0.03	78.14 ± 13.01	2/3
Pets	99%	No classifier (recalibrated)	98.14 ± 0.03	77.94 ± 12.72	2/3
Pets	99%	Anchored text + prototypes	96.85 ± 2.30	84.00 ± 2.66	3/3

novel accuracy at the same base constraint. The recalibrated removal restores part of this capacity to 61.36%, separating the stored classifier's value from the effect of mixture calibration.

The full frontier identifies where this value emerges. At the CIFAR 90% budget, the retained and dense prototype readouts give 80.10% and 80.58% novel accuracy at approximately 79.09% base accuracy. At 95%, the retained classifier admits more novel predictions under the stricter requirement. At 99%, it remains feasible in all three partitions; the classifier-free readouts are infeasible in all three, and dense fusion is feasible in two. Feasibility is a property of the within-base discrimination available before novel admission.

On Pets, the 95% budget gives approximately 92.93% base accuracy and 94.70% novel accuracy with retained columns, compared with 93.37% novel accuracy after classifier-free recalibration and 94.57% for dense fusion. Tightening the budget to 99% gives approximately 96.84% base accuracy and 90.99% novel accuracy with retained columns, compared with 84.00% for dense fusion, a paired 7.00 ± 5.57-point difference across all three partitions. The classifier's admission value

becomes most visible as the allowed base error approaches its closed-base level.

5.4 Value of the retained classifier across sequential arrivals

Five sessions add eight CIFAR classes or three Pets breeds at each arrival. Two orders per partition use seeds $1000 + p$ and $1100 + p$. The original base group remains the retention reference, and novel accuracy covers all novel classes admitted so far. Branch mixtures are calibrated once before the sequence. Fixed-gate trajectories use each model's selected offset throughout; retention frontiers evaluate the same common budgets at every session.

For $S = 5$, average incremental accuracy is $\overline{A} = S^{-1} \sum_{t=1}^{S} A_{\text{all},t}$. All-class accuracy is macro accuracy over the active union, weighted by its base and novel class counts. We report paired gains of the retained table over each alternative, both in $\overline{A}$ and in final-session accuracy. The two orders are averaged within each partition before computing the mean and sample standard deviation across three partitions.

On CIFAR, the retained table reaches 82.02% average incremental accuracy and 79.31% final accuracy (Table 2). Relative to the separately recalibrated classifier-free alternative, the paired gains are 2.18 ± 0.24 and 1.75 ± 0.23 percentage points, respectively. The fixed-gate removal gives a larger mean incremental gap of 10.62 points, while dense prototype fusion gives a gap of 0.46 ± 0.44 points. These paired comparisons quantify the classifier contribution at three levels: removal within a selected mixture, recalibration after removal, and replacement by base prototypes.

The constrained and unconstrained trajectories describe distinct operating requirements (Fig. 3). On Pets, fixed-gate average incremental accuracy is 94.09% for retained columns, 94.20% for the recalibrated classifier-free readout, and 94.35% for dense fusion. Under the common 95% base constraint, the retained readout's final novel gains are 1.33 points over classifier-free recalibration and 0.13 points over dense fusion; at 99%, its dense-fusion gap is 7.00 points. The value of preserving the classifier is therefore quantified jointly with the required base service level.

5.5 Base-validation retention control

The validation policy implements a common target without novel query labels. At the CIFAR 95% validation budget, retained columns give 82.99% base and 75.71% novel test accuracy, with the validation target feasible in all three partitions. The classifier-free and dense alternatives are feasible in two partitions. On Pets, the retained and dense models are feasible in all three and yield 90.29%/95.68% and 89.37%/95.63% base/novel accuracy, respectively. These are validation-selected operating points with their own achieved test accuracies. Appendix B provides all methods and budgets; per-session records retain selected offsets, targets and feasibility. This evaluation separates the capacity in Eq. (15) from validation-to-test transfer of the retention target.

5.6 Score stability and supporting analyses

The fixed reference frame supports both retention evaluations. The vocabulary tests measure zero base-score drift and zero base-only ranking churn on both datasets. Five-session fixed-offset expansion checks previously appended rows as well, with maximum floating-point differences of 2.85×10^{-5} on CIFAR and 3.58×10^{-6} on Pets. Final predictions agree across the two arrival orders in each partition. Appendix A supplies full readout comparisons, support-budget results, analytic-readout controls, evidence ablations and readout timings.

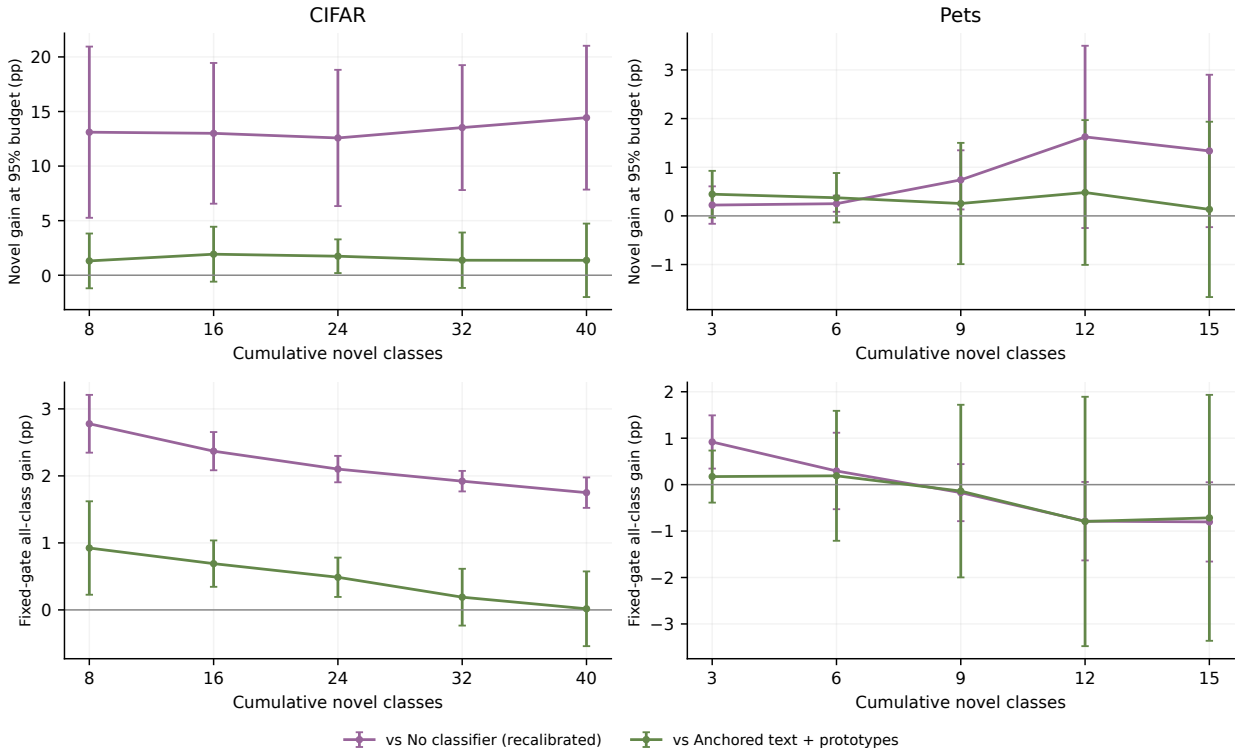


Fig. 3 The retained classifier's paired value across five arrivals. Top: novel-accuracy gain at the common 95% base-test retention budget, using descriptive matched-retention thresholds. Bottom: all-class accuracy gain with base-only calibrated gates and offsets fixed throughout the sequence. Differences are retained minus the named readout; error bars show partition-level sample standard deviation after averaging the two arrival orders.

Table 2 Sequential recognition with fixed base-only calibrated gates and offsets. Accuracy percentages are mean ± partition-level sample standard deviation. Incremental average covers all five sessions; final accuracy uses the full expanded vocabulary. Δ is the paired retained-table accuracy minus the readout in that row, in percentage points.

Data	Readout	Incremental avg.	Final	Δ avg.	Δ final
CIFAR	Retained classifier	82.02 ± 0.84	79.31 ± 1.14	0.00 ± 0.00	0.00 ± 0.00
CIFAR	Classifier removed (fixed gates)	71.40 ± 14.78	68.03 ± 15.63	10.62 ± 15.22	11.28 ± 16.33
CIFAR	No classifier (recalibrated)	79.84 ± 0.82	77.56 ± 1.02	2.18 ± 0.24	1.75 ± 0.23
CIFAR	Anchored text + prototypes	81.56 ± 0.52	79.30 ± 0.59	0.46 ± 0.44	0.02 ± 0.56
Pets	Retained classifier	94.09 ± 2.37	91.77 ± 3.16	0.00 ± 0.00	0.00 ± 0.00
Pets	Classifier removed (fixed gates)	77.17 ± 26.01	76.85 ± 23.25	16.92 ± 28.33	14.92 ± 26.40
Pets	No classifier (recalibrated)	94.20 ± 2.05	92.57 ± 2.31	-0.11 ± 0.56	-0.80 ± 0.85
Pets	Anchored text + prototypes	94.35 ± 0.60	92.48 ± 1.10	-0.26 ± 1.82	-0.72 ± 2.65

6 Discussion

Retained discrimination has an operational value beyond its closed-base accuracy. Under a shared base requirement, a classifier that separates the original classes more effectively can admit novel candidates at a more permissive threshold. The matched frontiers express this value directly as novel accuracy, while their feasible regions identify the base service levels that each readout can support.

Sequential comparisons make the contribution measurable across repeated arrivals. Fixed-gate removal evaluates the learned branch inside a selected mixture; classifier-free recalibration measures the value that remains after restoring the mixture's operating point; dense base prototypes provide a stronger replacement alternative. These distinctions connect retained parameters to recognition outcomes rather than treating parameter preservation as the final objective.

Reference anchoring supplies a consistent score frame for this evaluation. Stored base columns and reference statistics remain fixed, branch coefficients transfer from base-only episodes, and the group threshold controls novel admission. A fixed threshold gives append-only score preservation; validation-based threshold adjustment supplies an explicit retention policy. Both operate on the same stored classifier.

7 Conclusion

We presented retention-constrained class expansion with reference-anchored candidate tables. The formulation measures novel recognition at a common base-accuracy requirement and quantifies the retained classifier's paired contribution across successive arrivals. Two-dataset frontiers show how learned base discrimination supports novel admission as retention requirements tighten; five-session comparisons separate this contribution from calibration and prototype replacement.

Preserving the original classifier becomes a measurable source of recognition capacity within a consistent expandable score system.

■ Data and code availability

The experiments use public CIFAR-100 and Oxford-IIIT Pets data and the publicly released CLIP ViT-L/14 checkpoint. Code, source-hashed experimental records, prediction archives, manuscript sources, and table/figure generation scripts are available at `https://github.com/Cheerssom/Reference-Anchored-Candidate-Tables`. Dataset images, pretrained weights, and feature caches are obtained separately using the repository instructions.

■ Acknowledgements

This research received no external funding.

■ Competing interests

The author declares no competing interests.

■ References

[1] Liu Z, Miao Z, Zhan X, Wang J, Gong B, Yu S X. Large-Scale Long-Tailed Recognition in an Open World. arXiv preprint arXiv:1904.05160, 2019

[2] Cao K, Wei C, Gaidon A, Arechiga N, Ma T. Learning Imbalanced Datasets with Label-Distribution-Aware Margin Loss. arXiv preprint arXiv:1906.07413, 2019

[3] Cui Y, Jia M, Lin T Y, Song Y, Belongie S. Class-Balanced Loss Based on Effective Number of Samples. arXiv preprint arXiv:1901.05555, 2019

[4] Radford A, Kim J W, Hallacy C, Ramesh A, Goh G, Agarwal S, Sastry G, Askell A, Mishkin P, Clark J, Krueger G, Sutskever I. Learning Transferable Visual Models From Natural Language Supervision. In: International Conference on Machine Learning. 2021, 8748–8763

[5] Zhou K, Yang J, Loy C C, Liu Z. Learning to Prompt for Vision-Language Models. International Journal of Computer Vision, 2022, 130(9): 2337–2348

[6] Zhou K, Yang J, Loy C C, Liu Z. Conditional Prompt Learning for Vision-Language Models. arXiv preprint arXiv:2203.05557, 2022

[7] Shi J X, Wei T, Zhou Z, Shao J J, Han X Y, Li Y F. Long-Tail Learning with Foundation Model: Heavy Fine-Tuning Hurts. In: International Conference on Machine Learning. 2024, 45014–45039

[8] Zhang R, Zhang W, Fang R, Gao P, Li K, Dai J, Qiao Y, Li H. Tip-Adapter: Training-free Adaption of CLIP for Few-shot Classification. arXiv preprint arXiv:2207.09519, 2022

[9] Snell J, Swersky K, Zemel R S. Prototypical Networks for Few-shot Learning. arXiv preprint arXiv:1703.05175, 2017

[10] Wang Y, Chao W L, Weinberger K Q, Maaten v. d L. SimpleShot: Revisiting Nearest-Neighbor Classification for Few-Shot Learning. arXiv preprint arXiv:1911.04623, 2019

[11] Rebuffi S A, Kolesnikov A, Sperl G, Lampert C H. iCaRL: Incremental Classifier and Representation Learning. arXiv preprint arXiv:1611.07725, 2016

[12] Tao X, Hong X, Chang X, Dong S, Wei X, Gong Y. Few-Shot Class-Incremental Learning. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 2020, 12183–12192

[13] Zhou D W, Cai Z W, Ye H J, Zhan D C, Liu Z. Revisiting Class-Incremental Learning with Pre-Trained Models: Generalizability and Adaptivity are All You Need. International Journal of Computer Vision, 2024

[14] McDonnell M D, Gong D, Parvaneh A, Abbasnejad E, Hengel v. d A. RanPAC: Random Projections and Pre-trained Models for Continual Learning. In: Advances in Neural Information Processing Systems. 2023

[15] Ren J, Yu C, Sheng S, Ma X, Zhao H, Yi S, Li H. Balanced Meta-Softmax for Long-Tailed Visual Recognition. arXiv preprint arXiv:2007.10740, 2020

[16] Menon A K, Jayasumana S, Rawat A S, Jain H, Veit A, Kumar S. Long-tail learning via logit adjustment. arXiv preprint arXiv:2007.07314, 2020

[17] Kang B, Xie S, Rohrbach M, Yan Z, Gordo A, Feng J, Kalantidis Y. Decoupling Representation and Classifier for Long-Tailed Recognition. arXiv preprint arXiv:1910.09217, 2019

[18] Hu E J, Shen Y, Wallis P, Allen-Zhu Z, Li Y, Wang S, Wang L, Chen W. LoRA: Low-Rank Adaptation of Large Language Models. arXiv preprint arXiv:2106.09685, 2021

[19] Dosovitskiy A, Beyer L, Kolesnikov A, Weissenborn D, Zhai X, Unterthiner T, Dehghani M, Minderer M, Heigold G, Gelly S, Uszkoreit J, Houlsby N. An Image is Worth 16x16 Words: Transformers for Image Recognition at Scale. arXiv preprint arXiv:2010.11929, 2020

[20] Zhong Z, Cui J, Liu S, Jia J. Improving Calibration for Long-Tailed Recognition. arXiv preprint arXiv:2104.00466, 2021

[21] Wei T, Shi J X, Zhang M L, Li Y F. Robust long-tailed learning under label noise. Frontiers of Computer Science, 2026, 20(1): 2001321

[22] Zhu Y, Zhuang F, Zhang X, Qi Z, Shi Z, Cao J, He Q. Combat data shift in few-shot learning with knowledge graph. Frontiers of Computer Science, 2023, 17(1): 171305

[23] Wang Q, Xu K, Feng D, Ding B, Wang H. Memory replay with unlabeled data for semi-supervised class-incremental learning via temporal consistency. Frontiers of Computer Science, 2025, 19(12): 1912370

[24] Tang J, Wang X, Chen S. Global pre-fixing, local adjusting: a simple yet effective contrastive strategy for continual learning. Frontiers of Computer Science, 2027, 21(2): 2102324

[25] Chao W L, Changpinyo S, Gong B, Sha F. An Empirical Study and Analysis of Generalized Zero-Shot Learning for Object Recognition in the Wild. arXiv preprint arXiv:1605.04253, 2016

[26] Zhou D W, Qi Z H, Ye H J, Zhan D C. TV100: a TV series dataset that pre-trained CLIP has not seen. Frontiers of Computer Science, 2024, 18(5): 185349

[27] Krizhevsky A. Learning multiple layers of features from tiny images. Technical report, University of Toronto, 2009

[28] Parkhi O M, Vedaldi A, Zisserman A, Jawahar C V. Cats and dogs. In: IEEE Conference on Computer Vision and Pattern Recognition. 2012

A Auxiliary readout and mechanism analyses

For the auxiliary readout and support-budget comparisons, the gate grid is $a, u \in \{0, 0.25, 0.5, 1, 2\}$ and $d \in \{-2, -1.5, \ldots, 2\}$. Offset-calibrated controls use their separately stated grids. The main retention/value evaluation uses the common expanded grid in Section 4.5. All experiments share the same frozen representations, true class partitions and disjoint support pools.

A.1 Readouts and evaluation measures

All compared readouts use the same CLIP image embeddings, text anchors, class partitions, and novel support images. The text baseline uses cosine similarity to class names. The visual prototype baseline uses means of base fitting examples and means of novel support examples. Text–prototype fusion adds the two cosine branches with a mixing coefficient selected on the same pseudo-novel calibration episode; its grid is $\{0, 0.25, 0.5, 1, 2, 4\}$, including pure text.

Tip-Adapter uses a balanced k-image cache per candidate and scores $100q_T + \alpha q_{\text{cache}}$, with affinity $\exp[\beta(v^\top f(x_i) - 1)]$. The same base-only episode selects $\alpha \in \{0, 0.5, 1, 2, 4\}$ and $\beta \in \{1, 2, 5, 10\}$. Cache images come from the reserved pool for both groups; base-trained readouts use the full base fitting set.

We also compare raw evidence fusion and candidate-normalized fusion. Raw fusion uses unstandardized text, learned, and prototype scores with the same coefficient grid as the proposed table. Candidate-normalized fusion standardizes text over all active classes, learned scores over the base classes, and prototypes over active novel classes. It shares the base classifier and calibration protocol with reference-anchored fusion. This comparison changes the normalization population while holding the principal evidence sources fixed.

We report macro base accuracy A_B, macro novel accuracy A_N, all-class macro accuracy, and the harmonic mean in Eq. (14). Both datasets use equal numbers of base and novel classes, so all-class macro accuracy is $(A_B + A_N)/2$. On the balanced CIFAR test set this also equals sample accuracy; on Pets the macro measure gives each breed equal weight. Stability measures include maximum absolute change in an existing score, change of the maximizing class restricted to base classes, and prediction changes over the expanded vocabulary. Error flips are reported as fractions of all base test images, not conditional fractions of previously correct images.

A.2 Recognition after five-shot class expansion

Reference-anchored fusion reaches 86.03 ± 1.40 base accuracy and 66.90 ± 4.23 novel accuracy (Table 3). Its base accuracy is 7.71 percentage points above text-only classification and 3.56 points above text–prototype fusion, providing a retention-oriented operating point for class expansion.

Text–prototype fusion uses visual evidence for every class and reaches 80.00 ± 0.56 all-class accuracy and 77.53 ± 0.47 novel accuracy. Candidate-normalized fusion reaches 85.36 ± 0.66 base and 70.83 ± 4.33 novel accuracy. These points characterize the recognition trade-off accompanying the reference-anchored score system.

Raw fusion selects the text-only point in all five-shot CIFAR partitions. Both normalization rules activate learned evidence in their selected solutions, demonstrating the role of scale alignment when combining classifier logits with cosine similarities.

A.3 Fine-grained expansion on Oxford-IIIT Pets

On fine-grained Pets expansion, reference anchoring reaches 97.18 ± 2.25 base and 87.79 ± 6.18 novel accuracy (Table 4). Base accuracy is 2.41 points above text–prototype fusion. Mean base/novel accuracy also increases from 96.85%/86.49% with candidate normalization to 97.18%/87.79% with reference anchoring.

Text–prototype fusion reaches 94.34 ± 1.43 all-class macro accuracy; the reference-anchored table reaches 92.49 ± 2.83 with greater retention of base-breed discrimination. Both datasets use the same search grids and base-only calibration rule.

A.4 Calibration controls and analytic incremental readouts

Offset-calibrated controls share the same pseudo-novel episode (Table 5). Text + group offset uses base-referenced text scores and a novel offset. Anchored text + prototypes uses fixed base references for both branches and visual evidence for every class. Harmonic selection searches offsets from −4 to 4 in steps of 0.25 and prototype weights $\{0, 0.25, 0.5, 1, 2, 4\}$. Fixed-reference text–prototype fusion also satisfies Proposition 1; the score invariant applies across availability masks.

Anchored text–prototype fusion attains 82.40% base and 76.19% novel accuracy on CIFAR, and 94.58%/90.38% on Pets. Offset-calibrated text attains 78.92%/75.56% and 95.29%/89.85%, respectively. Together with the heterogeneous table, these controls separate group calibration, evidence configuration, and the shared fixed-reference property.

The analytic baseline follows the random-projection phase of RanPAC [14]. A fixed Gaussian matrix maps CLIP features to 2000 ReLU coordinates, and $(G + \lambda I)W = Q$ accumulates Gram matrices and class cross-products from base fitting data and novel support. Base validation macro accuracy selects $\lambda \in \{10^{-8}, \ldots, 10^{8}\}$; the pseudo episode selects a novel offset. This frozen adaptation uses base validation in place of the original within-task MSE selection. It attains 70.18%/52.53% base/novel accuracy on CIFAR and 93.49%/73.70% on Pets. Novel statistics refit the analytic readout; candidate-table expansion appends rows to its fixed readout.

Under the common 95% validation retention target, reference anchoring reaches 84.56% base and 73.87% novel test accuracy on CIFAR, compared with 82.84%/77.11% for anchored text–prototype fusion (Table 6). Both are feasible on all three validation partitions. On Pets, the corresponding test points are 97.18%/87.79% and 94.03%/90.96%. Text alone reaches the CIFAR validation target in one partition. Targets constrain validation selection; the table reports the resulting test operating points. Complete 95% and 99% results accompany the experimental records.

A.5 Vocabulary growth and score preservation

The vocabulary test appends nested sets of 10, 20, and 40 novel classes to the 40 CIFAR base classes, using sorted novel IDs and fixed five-shot gates. At each stage, we compare existing scores with the original base decision.

Table 3 Five-shot expansion from 40 base classes to 80 classes. All values are accuracy percentages, reported as mean ± sample standard deviation over three distinct class partitions. All readouts share frozen CLIP features; coefficients are selected using base-only calibration. Base and novel performance jointly specify each operating point.

Readout	Base	Novel	All	Harmonic
CLIP text	78.32 ± 0.25	76.86 ± 1.97	77.59 ± 0.86	77.57 ± 0.88
Visual prototypes	77.53 ± 2.03	60.92 ± 3.94	69.23 ± 2.09	68.17 ± 2.49
Text + prototypes	82.47 ± 0.87	77.53 ± 0.47	80.00 ± 0.56	79.92 ± 0.55
Tip-Adapter (tuned)	78.38 ± 0.24	77.42 ± 1.72	77.90 ± 0.83	77.89 ± 0.83
Raw evidence fusion	78.32 ± 0.25	76.86 ± 1.97	77.59 ± 0.86	77.57 ± 0.88
Candidate-normalized table	85.36 ± 0.66	70.83 ± 4.33	78.09 ± 2.02	77.36 ± 2.48
Reference-anchored table	86.03 ± 1.40	66.90 ± 4.23	76.46 ± 1.43	75.19 ± 2.14

Table 4 Five-shot Oxford-IIIT Pets expansion from 15 to 30 breeds under long-tailed base supervision. Values are macro accuracy percentages, mean ± sample standard deviation across three distinct breed partitions. Grids and the base-only calibration rule are transferred from the CIFAR experiment without dataset-specific search expansion.

Readout	Base	Novel	All	Harmonic
CLIP text	92.87 ± 3.37	94.05 ± 1.35	93.46 ± 1.59	93.43 ± 1.63
Visual prototypes	92.08 ± 2.61	68.30 ± 4.62	80.19 ± 2.33	78.35 ± 2.97
Text + prototypes	94.77 ± 2.91	93.91 ± 1.55	94.34 ± 1.43	94.31 ± 1.44
Tip-Adapter (tuned)	93.56 ± 2.45	94.07 ± 1.18	93.81 ± 1.27	93.80 ± 1.28
Raw evidence fusion	90.13 ± 8.01	91.18 ± 4.27	90.66 ± 6.13	90.63 ± 6.18
Candidate-normalized table	96.85 ± 1.50	86.49 ± 7.64	91.67 ± 4.56	91.29 ± 4.99
Reference-anchored table	97.18 ± 2.25	87.79 ± 6.18	92.49 ± 2.83	92.14 ± 3.23

Table 5 Additional five-shot controls with the same frozen encoder, support images, and base-only calibration. Values are mean ± sample standard deviation across three partitions. The random-projection readout is a controlled frozen RanPAC-style adaptation described in the text.

CIFAR-100

Readout	Base	Novel	All
Text + group offset	78.93 ± 2.75	75.56 ± 4.40	77.24 ± 0.89
Anchored text + prototypes	82.40 ± 2.02	76.19 ± 3.18	79.30 ± 0.59
Frozen RP-ridge (2000)	70.18 ± 0.69	52.52 ± 4.27	61.35 ± 1.83

Oxford-IIIT Pets

Readout	Base	Novel	All
Text + group offset	95.29 ± 3.80	89.85 ± 4.86	92.57 ± 2.31
Anchored text + prototypes	94.58 ± 3.22	90.38 ± 5.41	92.48 ± 1.10
Frozen RP-ridge (2000)	93.49 ± 3.32	73.70 ± 5.13	83.60 ± 1.13

Table 6 Validation retention-targeted calibration at five shots. The pseudo-base target is 95% of the closed reference-table pseudo-base accuracy. Among feasible grid points, selection maximizes pseudo-novel accuracy; infeasible partitions use the point with highest pseudo-base accuracy, then pseudo-novel accuracy. Feasible counts refer to validation partitions. Test values are percentages, mean ± sample standard deviation; test retention is not constrained.

Data	Readout	Base	Novel	All	Feasible
CIFAR	Text + group offset	81.47 ± 1.13	71.49 ± 5.03	76.48 ± 1.99	1/3
CIFAR	Anchored text + prototypes	82.84 ± 1.50	77.11 ± 4.46	79.98 ± 1.61	3/3
CIFAR	Candidate-normalized table	84.69 ± 1.92	72.45 ± 4.14	78.57 ± 1.54	3/3
CIFAR	Reference-anchored table	84.56 ± 1.31	73.88 ± 5.01	79.22 ± 2.21	3/3
Pets	Text + group offset	95.29 ± 3.80	89.85 ± 4.86	92.57 ± 2.31	3/3
Pets	Anchored text + prototypes	94.03 ± 3.37	90.96 ± 5.91	92.50 ± 1.27	3/3
Pets	Candidate-normalized table	97.25 ± 1.78	85.26 ± 7.25	91.26 ± 4.40	3/3
Pets	Reference-anchored table	97.18 ± 2.25	87.79 ± 6.18	92.49 ± 2.83	3/3

Reference anchoring gives zero measured base-score drift and zero base-only ranking churn in all nine CIFAR partition–vocabulary conditions (Fig. 4(a,b)). Candidate normalization changes existing scores by up to approximately 1.29–1.74 normalized units and changes a fraction of base-only predictions. The Pets test appends 3, 7, and 15 breeds and likewise records zero anchored score drift and ranking churn in all nine conditions.

At 40 appended classes, expanded predictions change on 3.63 ± 2.40% of base images, including 1.84±1.54% correct-to-wrong changes (Fig. 4(c)). Wrong-to-correct changes are zero, as specified by Corollary 1. The preserved base scores isolate these changes as competition from appended rows.

Five-session expansion adds eight CIFAR classes or three Pets breeds per session, with two random arrival orders per partition. Across 30 session records per dataset, comparisons of all previously admitted rows, including novel rows, give maximum floating-point score differences of 2.85×10^{-5} on CIFAR and 3.58×10^{-6} on Pets. Both arrival orders produce identical final predictions in every partition under class-ID tie breaking.

A.6 Support budget and evidence availability

At one, two, and five shots, base accuracy remains between 84.57% and 86.03%, while novel accuracy ranges from 66.90% to 70.86% (Table 7; Fig. 5). Calibration includes zero branch coefficients, allowing the selected mixture to adapt to the support budget. Each budget defines a separately calibrated operating point: support determines the prototype evidence, and fusion determines its competition with learned base

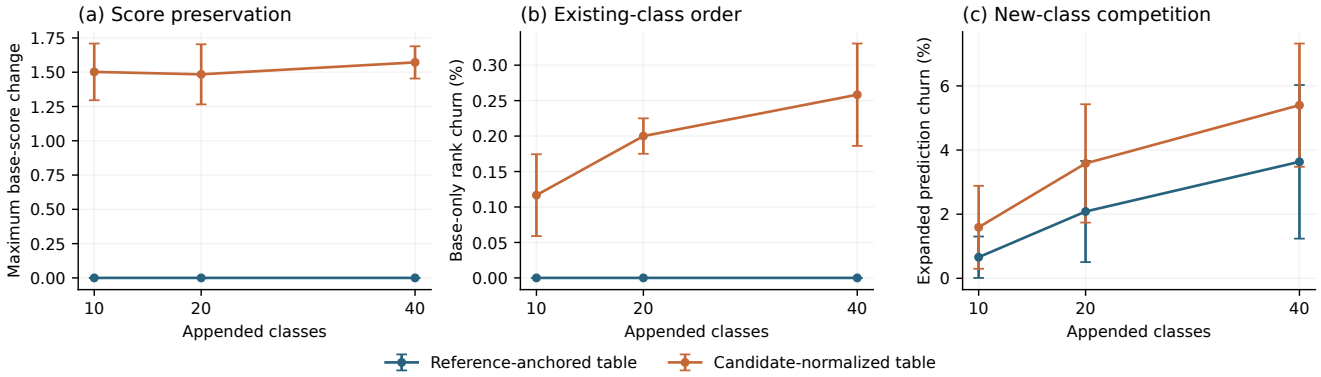


Fig. 4 Vocabulary growth with five-shot novel prototypes. Each curve averages three true class partitions; error bars show sample standard deviation. Reference-anchored fusion preserves existing scores and base-only rankings. Expanded predictions can still change when a new candidate wins. Maximum score drift is measured across all test queries and existing base classes.

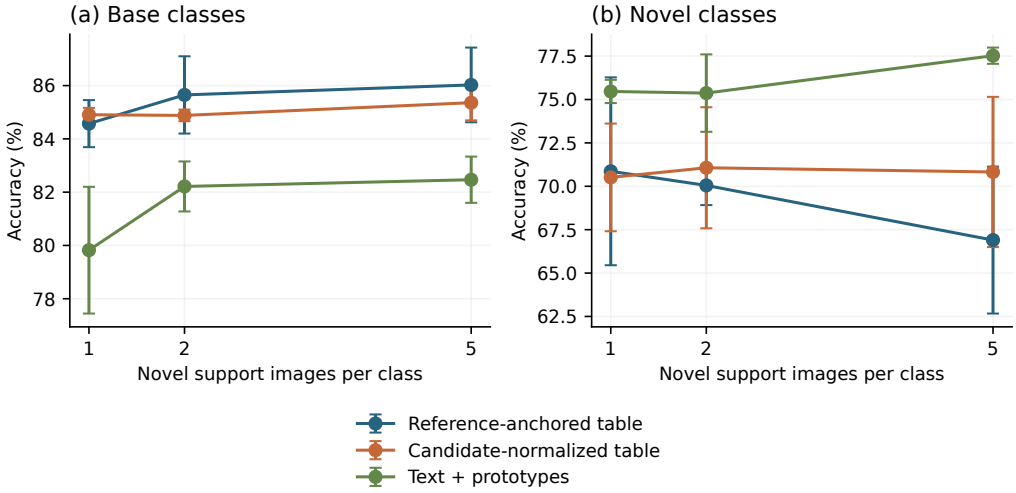


Fig. 5 Base and novel accuracy at one, two, and five support images per novel class. The same fixed-reference scoring rule is used at every budget, with coefficients selected on the corresponding base-only pseudo episode. Error bars represent variation between class partitions.

Table 7 Reference-anchored expansion across novel support budgets. Accuracy percentages are aggregated across partitions after averaging support subsets within each partition.

Shots	Base	Novel	All	Harmonic
1	84.57 ± 0.88	70.86 ± 5.41	77.72 ± 2.27	77.00 ± 2.85
2	85.65 ± 1.45	70.05 ± 1.13	77.85 ± 0.67	77.04 ± 0.67
5	86.03 ± 1.40	66.90 ± 4.23	76.46 ± 1.43	75.19 ± 2.14

discrimination.

A.7 Mechanism ablation and operating trade-off

Removing learned evidence, novel prototypes, or the offset changes a different part of the selected decision rule (Table 8). With the remaining coefficients fixed, these interventions identify how each source contributes to the five-shot operating point. The independently calibrated text and text–prototype readouts provide the corresponding reduced-model comparisons.

Figure 6 sweeps d from -2 to 2 in steps of 0.5 with a and u fixed. Increasing d shifts the margin between the best base and novel candidates while preserving within-group rankings (Eq. (13)). The resulting curve identifies how the offset controls admission of new categories; a validation retention target selects the operating point.

A.8 Readout efficiency

Candidate scoring from cached 768-dimensional features takes approximately 1.76, 0.75, and 0.78 ms per batch for 50, 60, and 80 candidates. Measurements use batches of 256 on an NVIDIA RTX 4070 Laptop GPU, five warm-up iterations, and 50 timed iterations with GPU synchronization. They include reference statistics and fusion and exclude image/text encoding. At these vocabulary sizes, launch and reduction overheads dominate the measured latency.

Table 8 Evidence removal at the selected five-shot reference-anchored operating point, with all remaining coefficients fixed. Accuracy percentages are mean ± sample standard deviation over three class partitions.

Readout	Base	Novel	All	Harmonic
Reference-anchored table	86.03 ± 1.40	66.90 ± 4.23	76.46 ± 1.43	75.19 ± 2.14
Without learned evidence	58.10 ± 32.21	80.72 ± 4.47	69.41 ± 13.87	62.85 ± 25.08
Without novel prototypes	86.42 ± 1.71	47.17 ± 30.85	66.79 ± 14.62	56.15 ± 30.05
Without offset	86.14 ± 1.69	65.58 ± 7.35	75.86 ± 2.83	74.25 ± 4.08

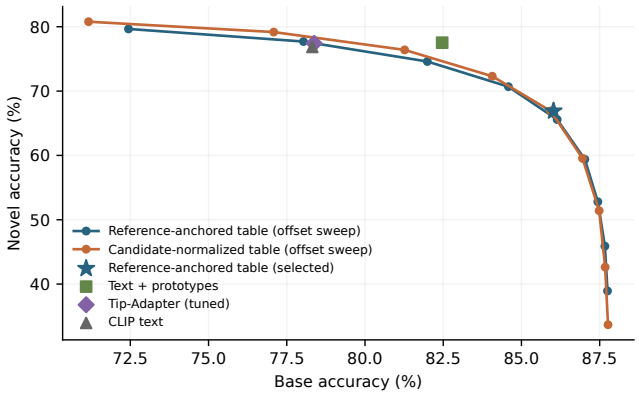


Fig. 6 Base–novel operating curves for five-shot expansion. The offset is swept with the other selected coefficients fixed; these test curves are descriptive analyses and are not used to select the reported operating points. Symbols identify base-only calibrated points and matched baselines.

■ B Validation-selected retention policy

Table 9 applies the common validation target after five arrivals. Raw records include all five target fractions and every arrival session. Infeasible targets are reported without substituting a zero novel accuracy. Comparisons with different feasible counts refer to different partition sets.

Table 9 Final-session test accuracies after the admission threshold is selected using base validation only. Budgets use the same closed-base validation reference for all methods within a partition. Values are percentages, mean ± sample standard deviation over feasible partitions; counts identify those partitions. Test accuracies are the outcomes of this operational policy and are not matched by test labels.

Data	Budget	Readout	Base	Novel	Feasible
CIFAR	90%	Retained classifier	78.33 ± 3.89	80.13 ± 2.25	3/3
CIFAR	90%	Classifier removed (fixed gates)	79.07 ± 3.94	70.79 ± 13.81	3/3
CIFAR	90%	No classifier (recalibrated)	78.73 ± 3.21	75.45 ± 5.43	3/3
CIFAR	90%	Anchored text + prototypes	80.18 ± 0.60	79.45 ± 0.76	3/3
CIFAR	95%	Retained classifier	82.99 ± 2.29	75.71 ± 3.14	3/3
CIFAR	95%	Classifier removed (fixed gates)	81.95 ± 0.04	71.54 ± 3.87	2/3
CIFAR	95%	No classifier (recalibrated)	81.85 ± 0.18	71.70 ± 4.10	2/3
CIFAR	95%	Anchored text + prototypes	81.95 ± 0.64	77.48 ± 1.52	2/3
CIFAR	99%	Retained classifier	86.48 ± 1.65	62.83 ± 10.11	3/3
CIFAR	99%	Classifier removed (fixed gates)	–	–	0/3
CIFAR	99%	No classifier (recalibrated)	–	–	0/3
CIFAR	99%	Anchored text + prototypes	86.85	53.85	1/3
Pets	90%	Retained classifier	84.87 ± 4.59	96.53 ± 0.78	3/3
Pets	90%	Classifier removed (fixed gates)	84.11 ± 2.76	96.44 ± 0.64	3/3
Pets	90%	No classifier (recalibrated)	82.00 ± 0.20	96.38 ± 0.52	3/3
Pets	90%	Anchored text + prototypes	85.69 ± 4.62	95.87 ± 1.57	3/3
Pets	95%	Retained classifier	90.29 ± 2.90	95.68 ± 0.83	3/3
Pets	95%	Classifier removed (fixed gates)	90.11 ± 1.17	95.71 ± 0.11	2/3
Pets	95%	No classifier (recalibrated)	89.88 ± 0.85	95.71 ± 0.11	2/3
Pets	95%	Anchored text + prototypes	89.37 ± 4.15	95.63 ± 1.55	3/3
Pets	99%	Retained classifier	96.43 ± 2.15	88.67 ± 7.89	3/3
Pets	99%	Classifier removed (fixed gates)	–	–	0/3
Pets	99%	No classifier (recalibrated)	–	–	0/3
Pets	99%	Anchored text + prototypes	97.70 ± 1.11	84.19 ± 12.46	2/3

C Reproduction details

The expansion experiment is implemented in `src/experiments/fcs_expansion.py`. It can be run from any working directory. The manifest records the code hash, frozen-cache hash, image-pool hashes, class assignments, pseudo-class assignments, support indices, regularization choices, and selection grids. The frozen support features are computed with the same deterministic interpolation used for the frozen training cache. The cached image embeddings are checked numerically before scoring.

Every novel support image comes from the five-image-per-class reserve created before long-tail sampling. This supplies a consistent support budget even for tail classes whose fitting pool contains fewer than five images. At five shots the three subset seeds select the same images in different orders, so the reported standard deviation is calculated across the three distinct class partitions. One- and two-shot results average the three subsets within each partition before computing the partition-level variation.

The main result JSON contains all compared readouts, including evidence-removal ablations. The vocabulary records contain the maximum score drift and both restricted and expanded prediction churn. The operating-curve records contain every swept offset, with no selection based on test outcomes. The efficiency records specify batch size and measured vocabulary size. The manuscript tables are generated directly from these files, and the summary CSV exposes both means and sample standard deviations.

The semantic prompts are “a photo of a {}.”, “a bad photo of a {}.”, “a cropped photo of a {}.”, “a close-up photo of a {}.”, “a bright photo of a {}.”, “a good photo of a {}.”, “a photo of the {}.”, and a second occurrence of “a photo of a {}.”. The repeated prompt follows the existing cached anchor construction and is retained consistently for all methods.

Frozen CLIP features are the sole image representation in the expansion experiments. Six fitting images are independently re-embedded and checked for cosine agreement above 0.999 with the cached features. Image hashes verify that fitting, validation, and reserved-support pools are disjoint. The fixed base text block is computed separately from novel text columns; sequential prototype products can exhibit the reported floating-point residuals when matrix widths change.

D Interpreting group competition

Let $M_B(x) = \max_{b\in\mathcal{B}}[\widehat{q}_T(x,b) + a\widehat{q}_L(x,b)]$ and $M_N(x) = \max_{n\in\mathcal{N}}[\widehat{q}_T(x,n) + u\widehat{q}_P(x,n)]$. The classifier selects a novel class precisely when $M_N(x) + d > M_B(x)$, subject to the fixed tie-breaking rule. Hence, the offset is a threshold on the margin $M_B - M_N$. Increasing d cannot change the winning base class or the winning novel class when all other quantities are fixed. It changes which group supplies the final winner. This explains the direction of the operating curves without assuming a calibrated probability interpretation for the fused score.

For nested candidate sets and fixed references, adding novel rows can increase M_N but cannot change M_B. An existing-class example may therefore cross the admission boundary as the vocabulary grows, while its base scores remain identical. This distinguishes the deployment behavior measured by expanded prediction churn from the normalization behavior measured by base-only ranking churn.