

Prompt- 1

 ChatGPT 

 Share 



Write a beginner-friendly C++ console program for an AI Roast Generator.

Requirements:

- Ask the user for their name
- Store at least 10 funny roast templates in a vector or array
- Randomly select one roast each time the program runs
- Replace the placeholder {name} with the user's input
- Use functions where possible
- Add comments to explain the code
- Ensure different output appears on different runs using srand(time(0))
- Handle empty input properly
- Keep the code simple and easy to understand for first-year students

Show less ^

This sounds like a really fun assignment 🤗

An AI that roasts people instead of helping them is honestly a hilarious idea. Here's a simple beginner-friendly C++ version you can start with:



 C++



 Ask anything

ChatGPT can make mistakes. Check important info. See [Cookie Preferences](#).

Prompt- 2

 ChatGPT 

 Share 



print a welcome msg too when the user logs in!
make the welcome msg also in a sarcastic way.. when the user enters no name.. print a roast msg there too

That would actually make the program way funnier 🤗

You can add a sarcastic welcome message before generating the roast, and also roast the user if they don't even enter a name 🤖

Here's the updated version:

 C++



```
#include <iostream>
#include <vector>
#include <cstdlib>
#include <ctime>

using namespace std;

int main()
{
```



 Ask anything

ChatGPT can make mistakes. Check important info. See [Cookie Preferences](#).

Prompt- 3

 ChatGPT 



add more roasts for empty name

Lmaooo yes 🤔

If the user can't even type their own name, the AI deserves multiple comeback options 🤖

You can store empty-name roasts in a separate vector and randomly pick one just like the normal roasts.

```
🚀 C++  
  
// Handle empty name input  
if(name.empty())  
{  
    vector<string> emptyRoasts =  
    {  
        "No name? Wow. Even your keyboard gave up on you.",  
        "Bro forgot their own name 🤖",  
        "Anonymous user detected... suspicious.",  
        "You left the name blank just like your assignment file.",  
        "No input? Confidence level = 0.",  
        "Even the AI expected at least ONE character.",  
        "You're hiding your name like it's your browser history.",  
        "Name not found. Personality probably missing 🕵️.",  
        "You had ONE job... type your name.",  
        "The Enter key worked harder than you did."  
    }  
}
```

 Ask anything



ChatGPT can make mistakes. Check important info. See [Cookie Preferences](#).

Prompt- 4

Fixing the bug

 ChatGPT 





got an compilation error and some weird corrects while it roasts..

The logic of the program looks correct overall 🙌

The weird symbols are happening because the terminal is not displaying the emoji properly (🔥 and 🤖).

Some C++ terminals on Windows don't handle Unicode emojis nicely.

Also, the warning is coming because `find()` returns a different data type than `int`.

You can fix both issues like this:


```
🚀 C++  
  
// Replace this:  
int pos = roast.find("{name}");  
  
// With this:
```

 Ask anything



ChatGPT can make mistakes. Check important info. See [Cookie Preferences](#).

Bug:

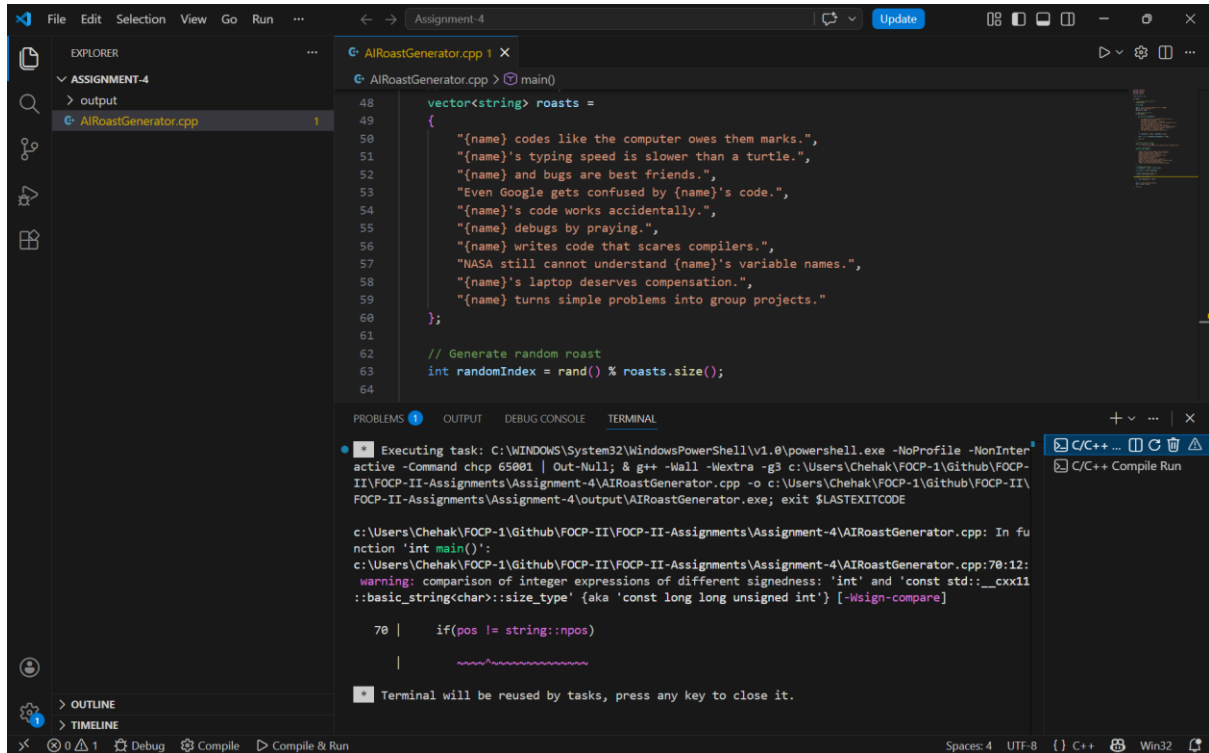

The screenshot shows the Visual Studio Code interface with the file `AIRoastGenerator.cpp` open. The code defines a vector of roast strings and a function to generate a random roast. The terminal shows the compilation process, including a warning about signed/unsigned integer comparison.


```
48 vector<string> roasts =
49 {
50     "{name} codes like the computer owes them marks.",
51     "{name}'s typing speed is slower than a turtle.",
52     "{name} and bugs are best friends.",
53     "Even Google gets confused by {name}'s code.",
54     "{name}'s code works accidentally.",
55     "{name} debugs by praying.",
56     "{name} writes code that scares compilers.",
57     "NASA still cannot understand {name}'s variable names.",
58     "{name}'s laptop deserves compensation.",
59     "{name} turns simple problems into group projects."
60 };
61
62 // Generate random roast
63 int randomIndex = rand() % roasts.size();
64
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

Executing task: C:\WINDOWS\System32\WindowsPowerShell\v1.0\powershell.exe -NoProfile -NonInteractive -Command chcp 65001 | Out-Null; & g++ -Wall -Wextra -g3 c:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4\AIRoastGenerator.cpp -o c:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4\output\AIRoastGenerator.exe; exit \$LASTEXITCODE

c:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4\AIRoastGenerator.cpp: In function 'int main()':
c:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4\AIRoastGenerator.cpp:70:12: warning: comparison of integer expressions of different signedness: 'int' and 'const std::__cxx11::basic_string<char>::size_type' {aka 'const long long unsigned int'} [-Wsign-compare]
70 | if(pos != string::npos)
| ~~~~~

Terminal will be reused by tasks, press any key to close it.

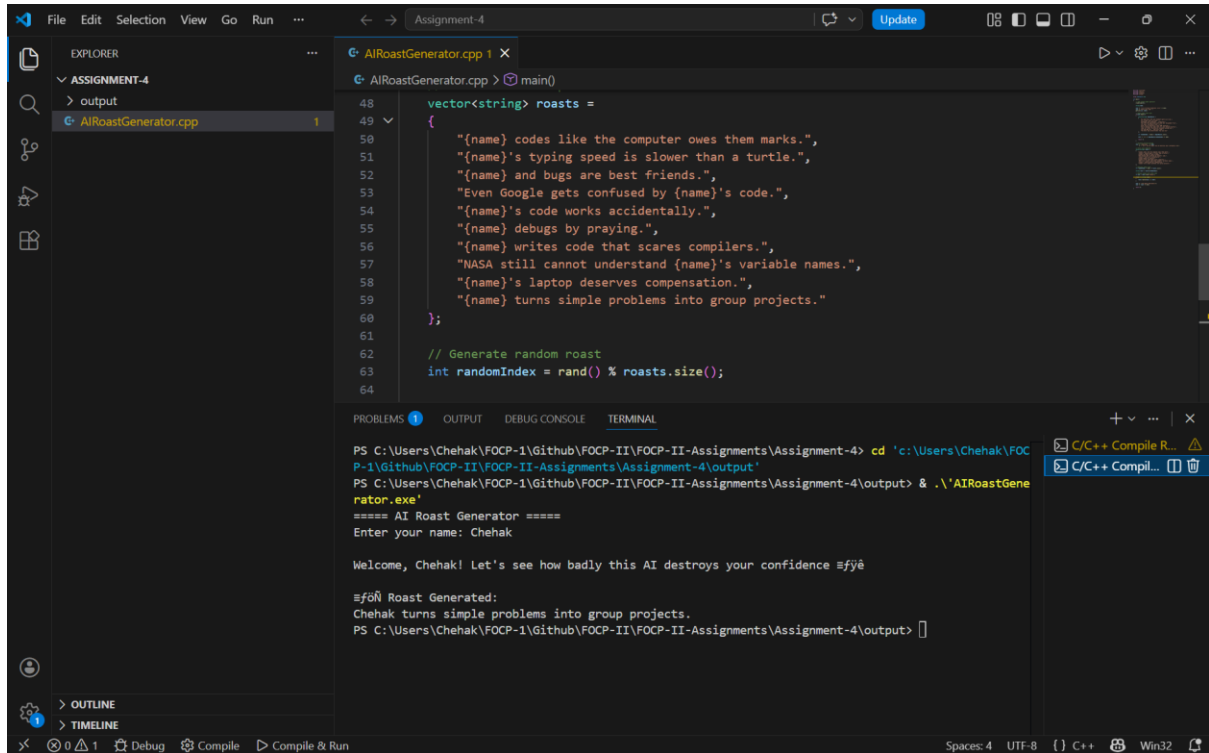

The screenshot shows the same Visual Studio Code interface, but now the program is being executed. The terminal displays the program's output, which includes a welcome message and a generated roast.


```
PS C:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4> cd 'c:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4\output'
PS C:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4\output> & .\AIRoastGenerator.exe
===== AI Roast Generator =====
Enter your name: Chehak

Welcome, Chehak! Let's see how badly this AI destroys your confidence #fyë

#föñ Roast Generated:
Chehak turns simple problems into group projects.
PS C:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4\output>
```

Prompt- 5

Bug Fixed; Correct output

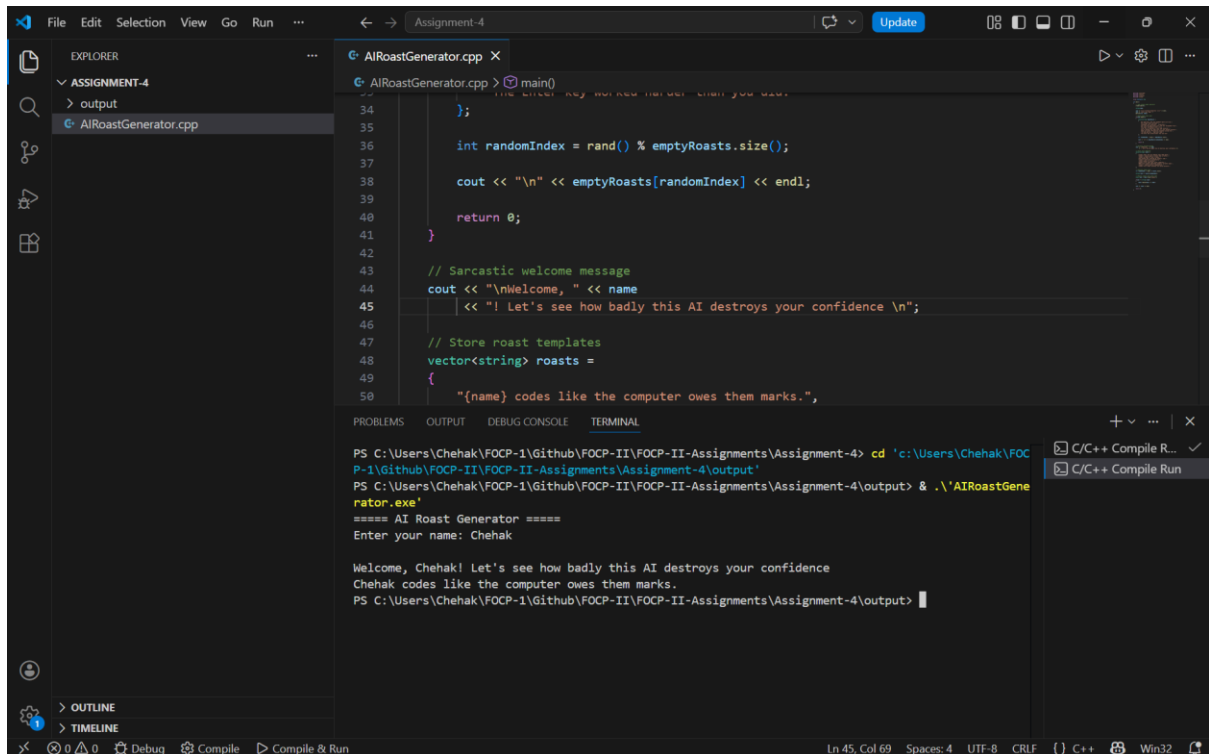


The screenshot shows the Visual Studio Code interface with the file `AI RoastGenerator.cpp` open. The code is as follows:

```
34  
35  
36     int randomIndex = rand() % emptyRoasts.size();  
37  
38     cout << "\n" << emptyRoasts[randomIndex] << endl;  
39  
40     return 0;  
41 }  
42  
43 // Sarcastic welcome message  
44 cout << "\nWelcome, " << name  
45     << "! Let's see how badly this AI destroys your confidence \n";  
46  
47 // Store roast templates  
48 vector<string> roasts =  
49 {  
50     "{name} codes like the computer owes them marks.",
```

The terminal output shows the program execution:

```
PS C:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4> cd 'c:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4\output'  
PS C:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4\output> & .\AI RoastGenerator.exe  
==== AI Roast Generator ====  
Enter your name: Chehak  
  
Welcome, Chehak! Let's see how badly this AI destroys your confidence  
Chehak codes like the computer owes them marks.  
PS C:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4\output>
```

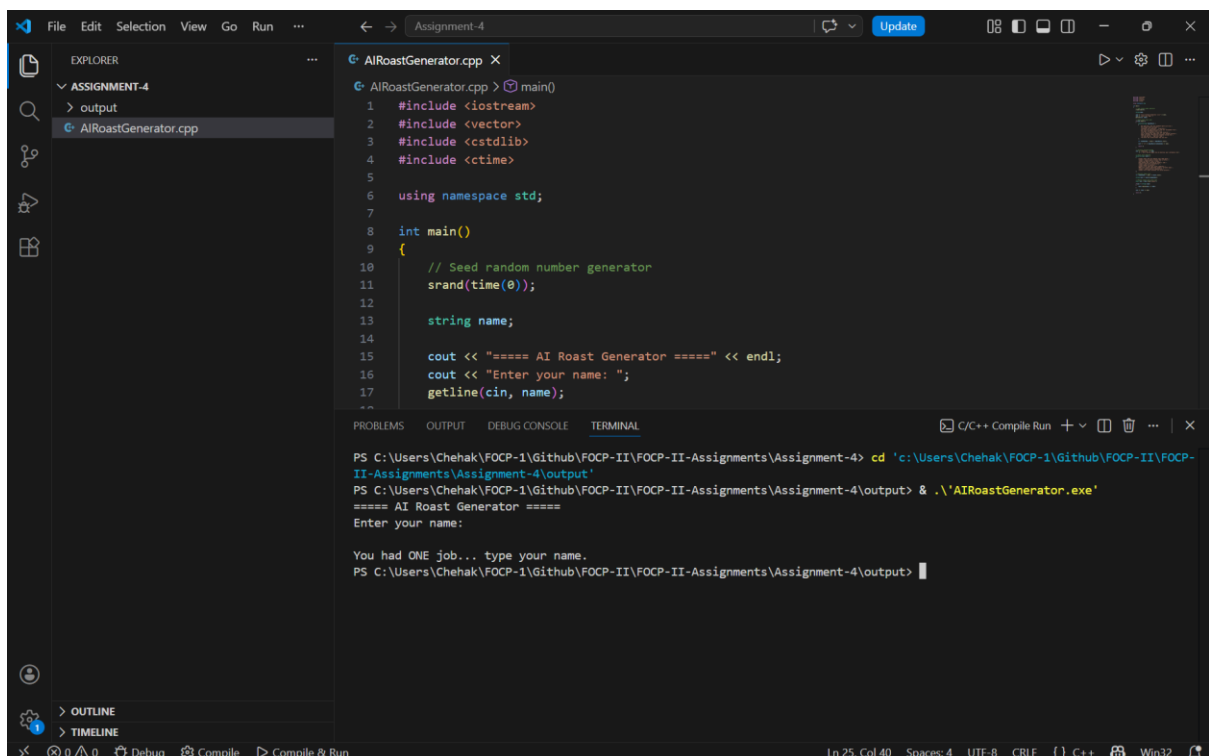

The screenshot shows the Visual Studio Code interface with the file `AI RoastGenerator.cpp` open. The code is as follows:

```
1 #include <iostream>  
2 #include <vector>  
3 #include <cstdlib>  
4 #include <ctime>  
5  
6 using namespace std;  
7  
8 int main()  
9 {  
10     // Seed random number generator  
11     srand(time(0));  
12  
13     string name;  
14  
15     cout << "==== AI Roast Generator =====< endl;  
16     cout << "Enter your name: ";  
17     getline(cin, name);  
18 }
```

The terminal output shows the program execution:

```
PS C:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4> cd 'c:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4\output'  
PS C:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4\output> & .\AI RoastGenerator.exe  
==== AI Roast Generator =====  
Enter your name:  
  
You had ONE job... type your name.  
PS C:\Users\Chehak\FOCP-1\Github\FOCP-II\FOCP-II-Assignments\Assignment-4\output>
```