

MISLAND AFRICA SYSTEM ADMINISTRATION AND DATA PREPARATION MANUAL

version

LocateIT Kenya Limited

July 02, 2025

Contents

MISLAND SYSTEM ADMINISTRATION AND DATA PREPARATION MANUAL	1
Introduction to MISLAND	1
MISLAND System Admin Panel	1
System Setting	2
Guest user polygon size limit	2
Signed up user polygon size limit	2
Enable user account activation	3
Email, URLs and host email host port setup	3
Enable Cache Limit	3
Backend port	3
Scheduled Tasks	3
Uploading and Manipulating data in the system	4
Uploading data set	4
Uploading Medalus data	4
Uploading Landsat data	4
Adding/editing Question	4
Modifying Gallery Items	5
Managing Custom shapefile	5
Computation Threshold	5
Managing Users	5
User Feedback	5
Google analytics	6
QGIS Admin	6
Publish the MISLAND QGIS plugin	6
1. Introduction	6
2. Prerequisites	6
3. Cleanup Before Publishing	7
4. Update <i>metadata.txt</i>	7
5. Create the Plugin ZIP File	7
6. Register on the QGIS Plugin Repository	8
7. Upload the Plugin	8
8. Uploading a New Version	8
9. Final Checklist	8
10. Useful Links	8
Data and Data sources	9
NDVI	9
Soil moisture	9
Precipitation	9
Evapotranspiration	9
Land cover	9
Soil carbon	9
Agroecological Zones	9
Soil Quality	10
Climate	10

Administrative Boundaries	10
Data Preparation Models	10
The graphical modeler	10
Definition of inputs	11
Definition of the workflow	13
Interacting with the canvas and elements	15
Saving and loading models	17
Exporting a model as an image, PDF or SVG	18
Editing a model	18
Editing model help files and meta-information	19
Exporting a model as a Python script	19
Introduction to MISLAND	20
Vegetation Indices	20
MODIS NDVI	20
Data download from Google Earth Engine	20
Landsat derived NDVI, MSAVI, SAVI	21
Data download from Google Earth Engine	21
Landcover Data Preparation	25
Data Processing and Download in GEE	25
Script	26
Data Preprocessing Steps in QGIS	26
Data Upload to MISLAND service	28
Forest Loss	29
Data Preprocessing and Download on GEE	29
Data Preprocessing in Qgis	30
Upload to MISLAND Service	31
Ecological Units Layer	31
QGIS Data pre-processing steps	31
Uploading the Ecological Units to MISLAND Service	33
Climate Quality Index	33
Data Preprocessing in Qgis	33
Uploading the Aridity Index to MISLAND Service	36
Uploading the Rainfall Data to MISLAND Service	36
Vegetation Qulality Index	36
Compute and download PROBAV maxNDVI form Google Earth Engine	37
Data Preprocessing in Qgis	37
Data Upload to MISLAND service	39
Management Qulity Index	39
Data Preprocessing in Qgis	39
Uploading the data to MISLAND Service	42
Coastal Vulnerability Index	42
Data Download	42
Data Processing Steps	42
Geomorphology	42
Upload to MISLAND Service	43
Coastal Slope	43

Tidal Range	44
Wave Height	45
Shoreline Erosion	45
Sea Level Rise	45
Indices and tables	46

MISLAND SYSTEM ADMINISTRATION AND DATA PREPARATION MANUAL



Misland Homepage

MISLAND Africa is an operational instrument relying on the international standards for reporting SDG 15.3.1 and technical approaches allowing the delivery of regular information on vegetation cover gain/loss to decision makers and environmental agencies at the first place.

The core-service provides land degradation indicators for Five African regions at two levels:

- At the regional level where low and medium resolution EO are used.
- At the pilot site level, where(customized indicators) can be developed, using medium resoultion data(landsat time series imagery and derived vegetation indices, combined with different satellite-derived climate data)

Introduction to MISLAND



Misland Homepage

MISLAND Africa is an operational instrument relying on the international standards for reporting SDG 15.3.1 and technical approaches allowing the delivery of regular information on vegetation cover gain/loss to decision makers and environmental agencies at the first place.

The core-service provides land degradation indicators for Five African regions at two levels:

- At the regional level where low and medium resolution EO are used.
- At the pilot site level, where(customized indicators) can be developed, using medium resoultion data(landsat time series imagery and derived vegetation indices, combined with different satellite-derived climate data)

MISLAND System Admin Panel

The following document is a system administrators manual that gives information on how to configure and manage the system. The backend of the system is built on django and therefore features the general characteristics of Django-admin settings. From the admin panel, the system administrators can manage dataset, users, and system resources thus ensuring that the computing resources are well utilized while still maintaining a high level of data security and integrity. The components of the system are described in details in the sections that follow.

System Setting

System settings can be accessed by going to *System Settings* and then click the item under *Email Host*. From here you can set several variables that are key to system resources management. One of the variables you can configure from here is the maximum size of a polygon that can be processed by the system on the fly.

The screenshot shows the 'Site administration' menu on the left with various options like 'AUTHENTICATION AND AUTHORIZATION', 'Groups', 'LDMS', 'Admin level ones', 'Admin level two', etc. On the right, there's a 'Recent' sidebar with items such as 'Erosio Raster', 'Fire-Ri Raster', 'Plant-I Raster', etc. A cursor is hovering over the 'System Settings' option in the main menu.

Vegetation Qulity Index model outputs

Guest user polygon size limit

Use this function to limit the size of the area for which unregistered users (Guest) can process data on the fly. The admin of the system can choose to turn off this option and therefore allow guest users to process large amounts of datasets on the fly.

The form has several sections:

- Enable guest user limit:** A checked checkbox with a note: "If checked, guest users will process polygons upto a specific polygon size". Below it is a dropdown menu set to "200000.0".
- Signup user polygon size limit:** A note: "Maximum size of polygon in hectares that anonymous users can process using the system".
- Enable signup user limit:** A checked checkbox with a note: "If checked, Logged in users will process polygons upto a specific polygon size". Below it is a dropdown menu set to "200000.0".
- Signup user polygon size limit:** A note: "Maximum size of polygon in hectares that Logged in users can process using the system".
- Enable task scheduling:** A checked checkbox with a note: "If checked, user tasks will be scheduled".
- Enable user account email activation:** A checked checkbox with a note: "If checked, users will activate their accounts via email".
- Email host:** A field containing "mail.locateit.co.ke" with a note: "Email server host".
- Email host user:** A field containing "misland@locateit.co.ke" with a note: "Email server user".

Guest Polygon Size limit

Signed up user polygon size limit

This limits the maximum size of an area a registered user can compute on the fly. Registered users have the option of scheduling processing tasks that use datasets that cover areas larger than the set polygon size limit. Tasks scheduling can be enabled/disabled by checking/unchecking the Enable tasks scheduling option.

The form is identical to the guest user form, with the following sections:

- Enable guest user limit:** A checked checkbox with a note: "If checked, guest users will process polygons upto a specific polygon size". Below it is a dropdown menu set to "200000.0".
- Signup user polygon size limit:** A note: "Maximum size of polygon in hectares that anonymous users can process using the system".
- Enable signup user limit:** A checked checkbox with a note: "If checked, Logged in users will process polygons upto a specific polygon size". Below it is a dropdown menu set to "200000.0".
- Signup user polygon size limit:** A note: "Maximum size of polygon in hectares that Logged in users can process using the system".
- Enable task scheduling:** A checked checkbox with a note: "If checked, user tasks will be scheduled".
- Enable user account email activation:** A checked checkbox with a note: "If checked, users will activate their accounts via email".
- Email host:** A field containing "mail.locateit.co.ke" with a note: "Email server host".
- Email host user:** A field containing "misland@locateit.co.ke" with a note: "Email server user".

Guest Polygon Size limit

Enable user account activation

When this option is turned on, a verification email is sent to every user who registers with the system. This ensures that users only register with emails that they have access to, and are therefore able to get notifications related to their activities within the system.

Email, URLs and host email host port setup

These options are crucial for connecting the backend to the frontend and are most likely to be setup only once during the initial system setup. Here you can set up the different emails required to ensure smooth working of the system. In addition to setting up the email urls, you can configure the raster clipping algorithm that is used when performing computation under Raster clipping algorithm option.

Email host:	<input type="text" value="mail.locateit.co.ke"/>
	Email server host
Email host user:	<input type="text" value="misland@locateit.co.ke"/>
	Email server user
Email host password:	<input type="password"/>
Email host protocol:	TLS
	Email protocol
Email host port:	<input type="text" value="587"/>
	Email server port
Task results url:	<input type="text" value="http://172.105.246.124:8080/#/dashboard/r"/>
	Url to redirect user when results of scheduled task are available. Task id will be appended at the end of the url.
Raster clipping algorithm:	All Touched
	All Touched-Include a pixel in the mask if it touches any of the shapes. Pixel Center-Include a pixel in the center of the shape.
Account activation url:	<input type="text" value="http://172.105.246.124:8080/#/dashboard/a"/>
	Url sent to user to activate his account. Uid and token will be appended to the url.
Change password url:	<input type="text" value="http://172.105.246.124:8080/#/forgotpassword"/>
	Url sent to user to reset his password. Uid and token will be appended to the url.

Email, URLs and host email host port setup

Enable Cache Limit

The system features a cache that enables the system to store pre-computed outputs of the system. The Cache limit is set in seconds, which indicates how long the results should be stored in the system once they are computed.

<input checked="" type="checkbox"/> Enable cache	If enabled, results of computation will be cached for a period as specified by the cache limit field.
Cache limit:	<input type="text" value="604800"/>
	Number of seconds that results will be cached.
<input checked="" type="checkbox"/> Override backend port	If checked, the system will override the default port and use the value of Backend port.
Backend port:	<input type="text" value="80"/>
	Port from which the system is served.

Enable Cashe Limit options

Backend port

The system is designed to automatically generate a backend port, but it can be set manually by checking the override backend port option. When all configuration for the system settings are done, click the Save button to apply all the changes made to system settings.

<input checked="" type="checkbox"/> Enable cache	If enabled, results of computation will be cached for a period as specified by the cache limit field.
Cache limit:	<input type="text" value="604800"/>
	Number of seconds that results will be cached.
<input checked="" type="checkbox"/> Override backend port	If checked, the system will override the default port and use the value of Backend port.
Backend port:	<input type="text" value="80"/>
	Port from which the system is served.

Enable Cashe Limit options

Scheduled Tasks

As mentioned before, the system enables users to schedule tasks that involve computation of relatively large dataset. To view all the scheduled tasks, select the Scheduled Tasks option in the admin panel. This option lists all scheduled tasks with information related to the tasks, including who scheduled them, when they were scheduled and the current status of those tasks.



Schedule task

Uploading and Manipulating data in the system

The Raster option enables system admin to upload, filter, delete and edit the raster datasets.

Uploading rasters

Uploading data set

To upload the dataset, click on the Add Raster button. This will open a data upload panel that will guide you through the data upload process.

Add raster form

Uploading Medalus data

Different types of datasets have different fields based on their roles in the system. For example, all medalus datasets must be associated with Aspect so that the system associates them with the computation modules for mebalus, see figure 7.

Uploading Landsat data

Landsat rasters are relatively heavier in size per unit area, and should therefore be uploaded at country level. For this reason, in addition to providing the basic information such as name and year, they must be associated with their corresponding administrative level, e.g. admin level 0, see figure 8. Some of the datasets that are derived from landsat satellite images include MSAVI, SAVI and NDVI. Uploading the other datasets Uploading the other dataset is very similar to uploading Medalus dataset. LULC, Modis derived Vegetation indices, Carbon stock (SOC) and ecological units dataset must be uploaded at the regional scale, i.e. one file for the whole of North African States.

Adding/editing Question

The Frontend of Misland provide a web page through which Frequently Asked Questions (FAQ) are displayed. The Question option of the admin panel provides a user friendly tool through which FAQs can be managed. From here, new FAQ can be added, outdated ones deleted or deactivated, and existing ones edited.

Questions Section

Note that you can have several FAQs in the system but only display a few of them by activating and deactivating them.

Figure 11.

Modifying Gallery Items

The Gallery option on the admin panel is used to Upload new images on the homepage of Misland. The system is designed in such a way that you do not need to delete old images, all you need to activate (check/uncheck) the image you want displayed, and deactivate outdated images.

The screenshot shows a form titled 'Change gallery'. It includes fields for 'Image name' (containing 'world bank'), 'Image file' (showing 'Currently: world_bank.jpg' and a 'Choose File' button), 'Image desc' (containing 'world bank'), and a checkbox labeled 'Is published' with the note 'If not published, the image will not be shown to users'. A 'Delete' button is also visible.

Publishing Gallery Items

Managing Custom shapefile

This option enables the system administrator to view and manage all the custom shapefiles (Shapefiles uploaded by individual users).

Computation Threshold

Computation thresholds are used to limit the amount of area that can be computed in real time within the system. This is an important feature of the system as it enables the system administrator to manage the computing resources of the system. There are two main thresholds that are set here; The Modis threshold, which applies to all dataset with spatial resolution greater than 30m, and Landsat threshold, which apply to dataset with spatial resolution of 30m.

Managing Users

The admin panel provides tools for managing registered system users. Using this functionality, the system admin can create new user, activate/deactivate existing user and assign different privileges to different them.

The screenshot shows the 'Permissions' section of a user management interface. It includes checkboxes for 'Active' (checked), 'Staff status' (unchecked), 'Is admin' (unchecked), and 'Is superuser' (unchecked). A small note next to 'Active' says 'Designates whether this user should be treated as active. Unselect this instead of deleting accounts.'

Gallery

To modify the access rights of a particular system user, just click that user's name on the system panel and implement the desired changes. After the modification, just click the save button and the changes will take effect.

User Feedback

User feedback is sent to a github account for which the system admin can login and take appropriate action. User feedback template is able to submit both text and images sent by the users of the system.

Google analytics

The system uses google analytics to track user visits to this online service. Some of the information google analytics is able to provide include the number of visitors who are currently active on the system, the number of visits in a particular period, the countries from which online traffic is coming from among other information. Figure 16 shows sample information provided by google analytics. [Google Analytics Link](#)

QGIS Admin

Publish the MISLAND QGIS plugin

This document provides a complete guide for administrators and GIS developers on how to package and publish the MISLAND QGIS plugin to the official QGIS Plugin Repository.

1. Introduction	6
2. Prerequisites	6
3. Cleanup Before Publishing	7
4. Update <i>metadata.txt</i>	7
5. Create the Plugin ZIP File	7
6. Register on the QGIS Plugin Repository	8
7. Upload the Plugin	8
8. Uploading a New Version	8
9. Final Checklist	8
10. Useful Links	8

1. Introduction

The MISLAND plugin is a QGIS plugin supporting calculation fo indicators, access to data, and production of print maps. The code for the plugin, and further instructions on installing it if you want to modify the code, are in [MISLAND](#) Github repository.

2. Prerequisites

Before you begin, ensure you have the following:

- The MISLAND plugin installed on your machine.
- QGIS installed locally
- A registered account on the QGIS Plugin Repository: <https://plugins.qgis.org>

Recommended directory structure:

```
MISLAND/
└─── data/                                # Contains all constants like the computation years
└─── gui/                                 # Contains all the graphical user interfaces
└─── help/
└─── i18n/
└─── icons/                               # Contains all the icons
└─── processing_provider/
└─── scripts/
└─── test/
└─── algorithms.py
└─── api.py
└─── calculate.py
└─── CVI.py
└─── downloads.py
└─── forests.py
└─── icon.png
```

```

    LICENSE
    medalus.py
    metadata.txt          # QGIS plugin metadata
    misland_logo.png
    plugin.py              # The plugin's entry point
    plugin_upload.py
    resources.py
    resources.qrc          # Qt resource file
    SDG.py
    settings.py
    Styles.py
    summary.py
    vegetation.py

```

3. Cleanup Before Publishing

Before creating the ZIP package, you must clean up your plugin directory to avoid uploading unnecessary or sensitive files.

Delete the following items (if they exist):

- Any generated files left in the repository (ui_*.py, resources_rc.py, gen. help files...).
- __MACOSX, .git, __pycache__ or other hidden directories

Note

Ensure the plugin's root directory has the `LICENSE` file containing the relevant license governing the plugin's use and distribution.

4. Update `metadata.txt`

Ensure your `metadata.txt` is complete and up to date. Example:

```

[general]
name=misland
qgisMinimumVersion=3.22
description=A plugin for land parcel visualization and management
version=1.0.0
author=GIS Admin Team
email=gis@example.org
changelog=changelog.txt
homepage=https://github.com/your-org/misland-plugin
tracker=https://github.com/your-org/misland-plugin/issues
repository=https://github.com/your-org/misland-plugin

```

Refer to the QGIS documentation for all valid fields:
https://docs.qgis.org/latest/en/docs/pyqgis_developer_cookbook/plugins/plugins.html#plugin-metadata

Note

Always ensure you update the version of the plugin every time you want to upload a new version of the plugin

5. Create the Plugin ZIP File

Zip the folder the contains the plugin's source code, that is, the plugin's root folder.

```
zip -r MISLAND.zip MISLAND
```


6. Register on the QGIS Plugin Repository

If you haven't already:

1. Visit https://www.osgeo.org/community/getting-started-osgeo/osgeo_userid/
2. Complete registration and confirm your email
3. Log in and navigate to **My Plugins > Upload a plugin**

7. Upload the Plugin

1. Go to <https://plugins.qgis.org/plugins/add/>
2. Upload the *misland.zip* file
3. Fill in any relevant plugin details that are requested
4. Click **Submit Plugin**

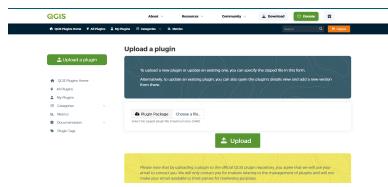


Plugin Upload form

After upload, the plugin will be reviewed before it appears in the public listing.

8. Uploading a New Version

To update the plugin:

1. Increment the version in *metadata.txt* (e.g., *1.0.1*)
2. Update the changelog
3. Recreate the ZIP file
4. Go to your plugin page on <https://plugins.qgis.org/plugins/MISLAND/>
5. Click **Add version**
6. Upload the updated ZIP

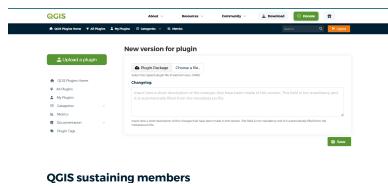

Upload new version page

9. Final Checklist

- Plugin passes QGIS Plugin Validator
- *metadata.txt* is updated and complete
- Unnecessary files removed (*_pycache_*, *.git*, *.idea*, etc.)
- ZIP file structure is flat (not nested)
- Plugin tested in QGIS
- Plugin submitted via QGIS Plugin Repository

10. Useful Links

- Plugin Repository: <https://plugins.qgis.org/>
- Plugin Guidelines: <https://plugins.qgis.org/help/>
- Plugin Builder: <https://github.com/g-sherman/qgis-plugin-builder>

Data and Data sources

- QGIS Plugin Validation: <https://github.com/qgis/qgis-plugin-validator>

Data and Data sources

MISLAND Africa draws on a number of data sources. The data sets listed below are owned/made available by the following organizations and individuals under separate terms as indicated in their respective metadata.

NDVI

Sensor/Dataset	Temporal	Spatial	Extent	License
LANDSAT7	2001-2024	30 m	Global	Public Domain
MOD13Q1-coll6	2001-2016	250 m	Global	Public Domain

Soil moisture

Sensor/Dataset	Temporal	Spatial	Extent	License
MERRA 2	1980-2016	0.5° x 0.625°	Global	Public Domain
ERA I	1979-2016	0.75° x 0.75°	Global	Public Domain

Precipitation

Sensor/Dataset	Temporal	Spatial	Extent	License
GPCP v2.3 1 month	1979-2019	2.5° x 2.5°	Global	Public Domain
GPCC V6	1891-2019	1° x 1°	Global	Public Domain
CHIRPS	1981-2016	5 km	50N-50S	Public Domain
PERSIANN-CDR	1983-2015	25 km	60N-60S	Public Domain

Evapotranspiration

Sensor/Dataset	Temporal	Spatial	Extent	License
MOD16A2	2000-2014	1 km	Global	Public Domain

Land cover

Sensor/Dataset	Temporal	Spatial	Extent	License
ESA CCI Land Cover	1992-2018	300 m	Global	CC by-SA 3.0

Soil carbon

Sensor/Dataset	Temporal	Spatial	Extent	License
Soil Grids (ISRIC)	Present	250 m	Global	CC by-SA 4.0

Agroecological Zones

Sensor/Dataset	Temporal	Spatial	Extent	License
FAO - IIASA Global Agroecological Zones (GAEZ)	2000	8 km	Global	Public Domain

Soil Quality

Sensor/Dataset	Temporal	Spatial	Extent	License
Soil Texture and Depth	Present	250 m	Global	CC by-SA 4.0
Parent Material	Present	N/A	Global	CC by-SA 4.0
Slope	Present	30 m	Global JPL public	

Climate

Sensor/Dataset	Temporal	Spatial	Extent	License
Terra Climate	1985-2019	30 m	Global	Public Domain

Administrative Boundaries

Sensor/Dataset	Temporal	Spatial	Extent	License
Natural Earth Administrative Boundaries	Present	10/50m	Global	Public Domain

Note

The [Natural Earth Administrative Boundaries](#) provided in MISLAND Africa are in the [public domain](#). The boundaries and names used, and the designations used, in MISLAND Africa do not imply official endorsement or acceptance by Conservation International Foundation, or by its partner organizations and contributors.

If using MISLAND Africa for official purposes, it is recommended that users choose an official boundary provided by the designated office of their country.

Data Preparation Models

The graphical modeler

The *graphical modeler* allows you to create complex models using a simple and easy-to-use interface. When working with a GIS, most analysis operations are not isolated, rather part of a chain of operations. Using the graphical modeler, that chain of operations can be wrapped into a single process, making it convenient to execute later with a different set of inputs. No matter how many steps and different algorithms it involves, a model is executed as a single algorithm, saving time and effort.

The graphical modeler can be opened from the Processing menu (Processing ▶ Graphical Modeler).

The modeler has a working canvas where the structure of the model and the workflow it represents are shown. The left part of the window is a section with five panels that can be used to add new elements to the model:

1. **Model Properties:** you can specify the name of the model and the group that will contain it
2. **Inputs:** all the inputs that will shape your model
3. **Algorithms:** the Processing algorithms available
4. **Variables:** you can also define variables that will only be available in the Processing Modeler
5. **Undo History:** this panel will register everything that happens in the modeler, making it easy to cancel things you did wrong.



Modeler

Creating a model involves two basic steps:

1. *Definition of necessary inputs.* These inputs will be added to the parameters window, so the user can set their values when executing the model. The model itself is an algorithm, so the parameters window is generated automatically as for all algorithms available in the Processing framework.
2. *Definition of the workflow.* Using the input data of the model, the workflow is defined by adding algorithms and selecting how they use the defined inputs or the outputs generated by other algorithms in the model.

Definition of inputs

The first step is to define the inputs for the model. The following elements are found in the Inputs panel on the left side of the modeler window:


- Authentication Configuration
- Boolean
- Color
- Connection Name
- Coordinate Operation
- CRS
- Database Schema
- Database Table
- Datetime
- Distance
- DXF Layers
- Enum
- Expression
- Extent
- Field Aggregates
- Fields Mapper
- File/Folder
- Geometry
- Map Layer
- Map Theme
- Matrix
- Mesh Dataset Groups
- Mesh Dataset Time
- Mesh Layer
- Multiple Input
- Number
- Point
- Print Layout
- Print Layout Item
- Range
- Raster Band

- Raster Layer
- Scale
- String
- TIN Creation Layers
- Vector Features
- Vector Field
- Vector Layer
- Vector Tile Writer Layers

Note

Hovering with the mouse over the inputs will show a tooltip with additional information.

When double-clicking on an element, a dialog is shown that lets you define its characteristics. Depending on the parameter, the dialog will contain at least one element (the description, which is what the user will see when executing the model). For example, when adding a raster data, as can be seen in the next figure, in addition to the description of the parameter.

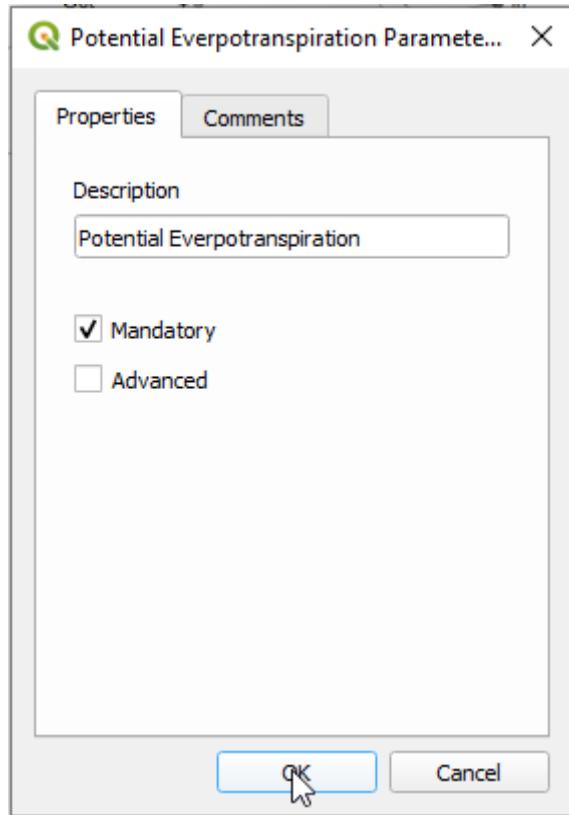


Model Parameters Definition

You can define your input as mandatory for your model by checking the **Mandatory** option and by checking the **Advanced** checkbox you can set the input to be within the Advanced section. This is particularly useful when the model has many parameters and some of them are not trivial, but you still want to choose them.

The **Comments** tab allows you to tag the input with more information, to better describe the parameter. Comments are visible only in the modeler canvas and not in the final algorithm dialog.

For each added input, a new element is added to the modeler canvas.



Model Parameters


You can also add inputs by dragging the input type from the list and dropping it at the position where you want it in the modeler canvas. If you want to change a parameter of an existing input, just double click on it, and the same dialog will pop up.

Definition of the workflow

In the following example we will add two inputs and two algorithms. The aim of the model is to copy the elevation values from a DEM raster layer to a line layer using the Drape algorithm, and then calculate the total ascent of the line layer using the Climb Along Line algorithm.

In the Inputs tab, choose the two inputs as Vector Layer for the line and Raster Layer for the DEM. We are now ready to add the algorithms to the workflow.

Algorithms can be found in the Algorithms panel, grouped much in the same way as they are in the Processing toolbox.

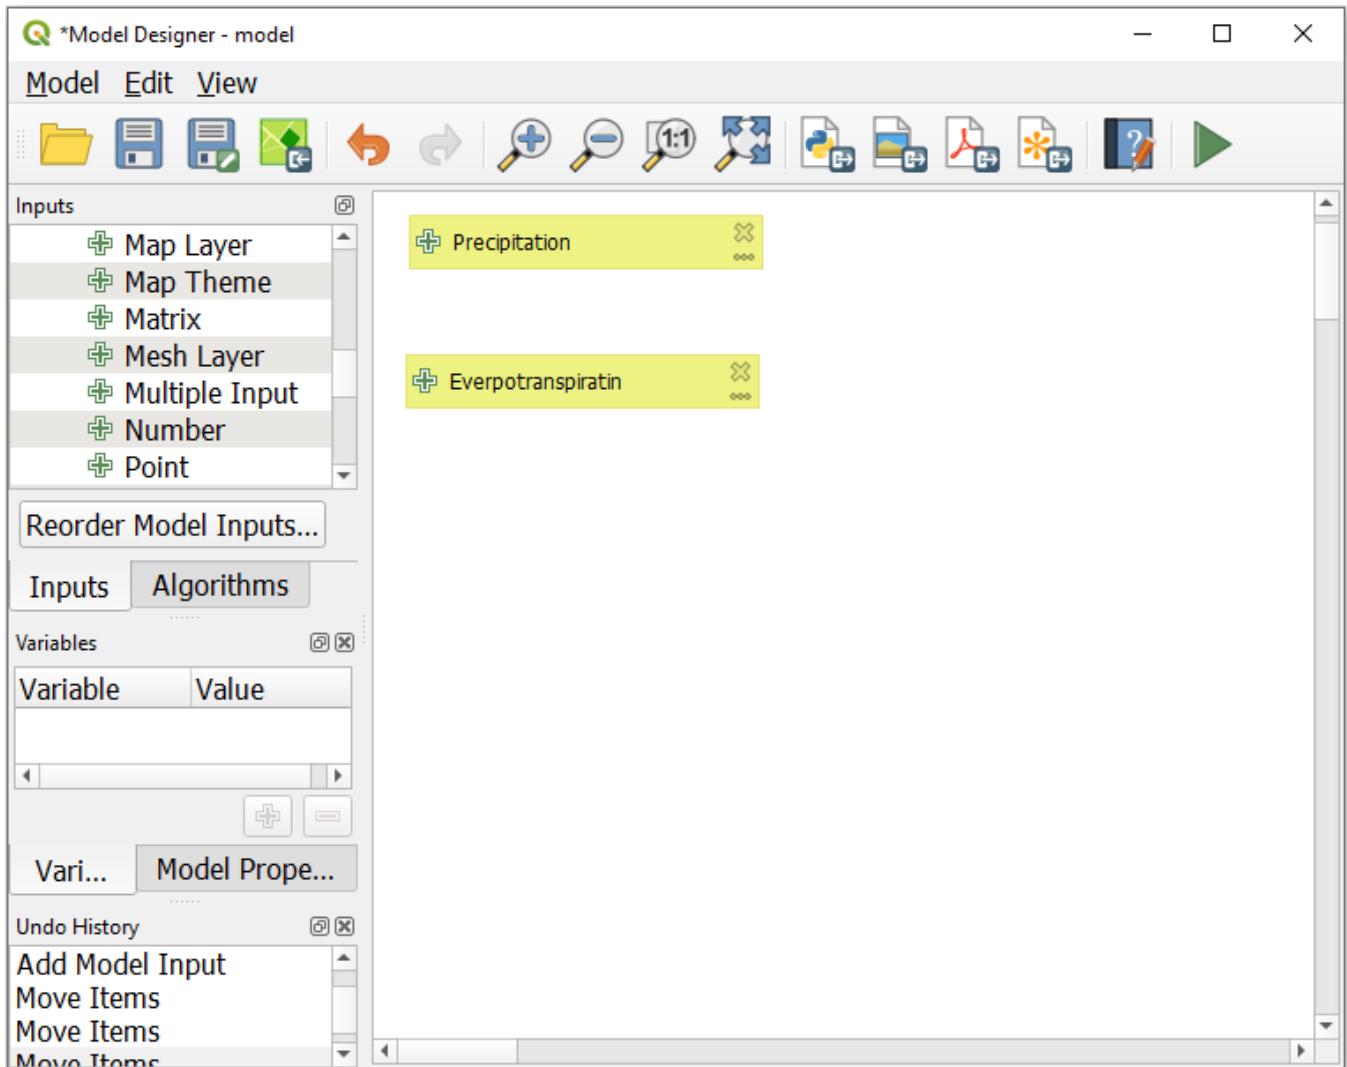*Model Inputs*

To add an algorithm to a model, double-click on its name or drag and drop it, just like for inputs. As for the inputs you can change the description of the algorithm and add a comment. When adding an algorithm, an execution dialog will appear, with a content similar to the one found in the execution panel that is shown when executing the algorithm from the toolbox. The following picture shows both the Mean PET and the Aridity Score algorithm dialogs.



Model Algorithm parameters

As you can see there are some differences.

You have four choices to define the algorithm **inputs**:

- Value: allows you to set the parameter from a loaded layer in the QGIS project or to browse a layer from a folder

- Pre-calculated Value: with this option you can open the Expression Builder and define your own expression to fill the parameter. Model inputs together with some other layer statistics are available as **variables** and are listed at the top of the Search dialog of the Expression Builder


- Model Input: choose this option if the parameter comes from an input of the model you have defined. Once clicked, this option will list all the suitable inputs for the parameter

- Algorithm Output: is useful when the input parameter of an algorithm is an output of another algorithm

Algorithm **outputs** have the additional Model Output option that makes the output of the algorithm available in the model.

If a layer generated by the algorithm is only to be used as input to another algorithm, don't edit that text box.

In the following picture you can see the two input parameters defined as **Model Input** and the temporary output layer:

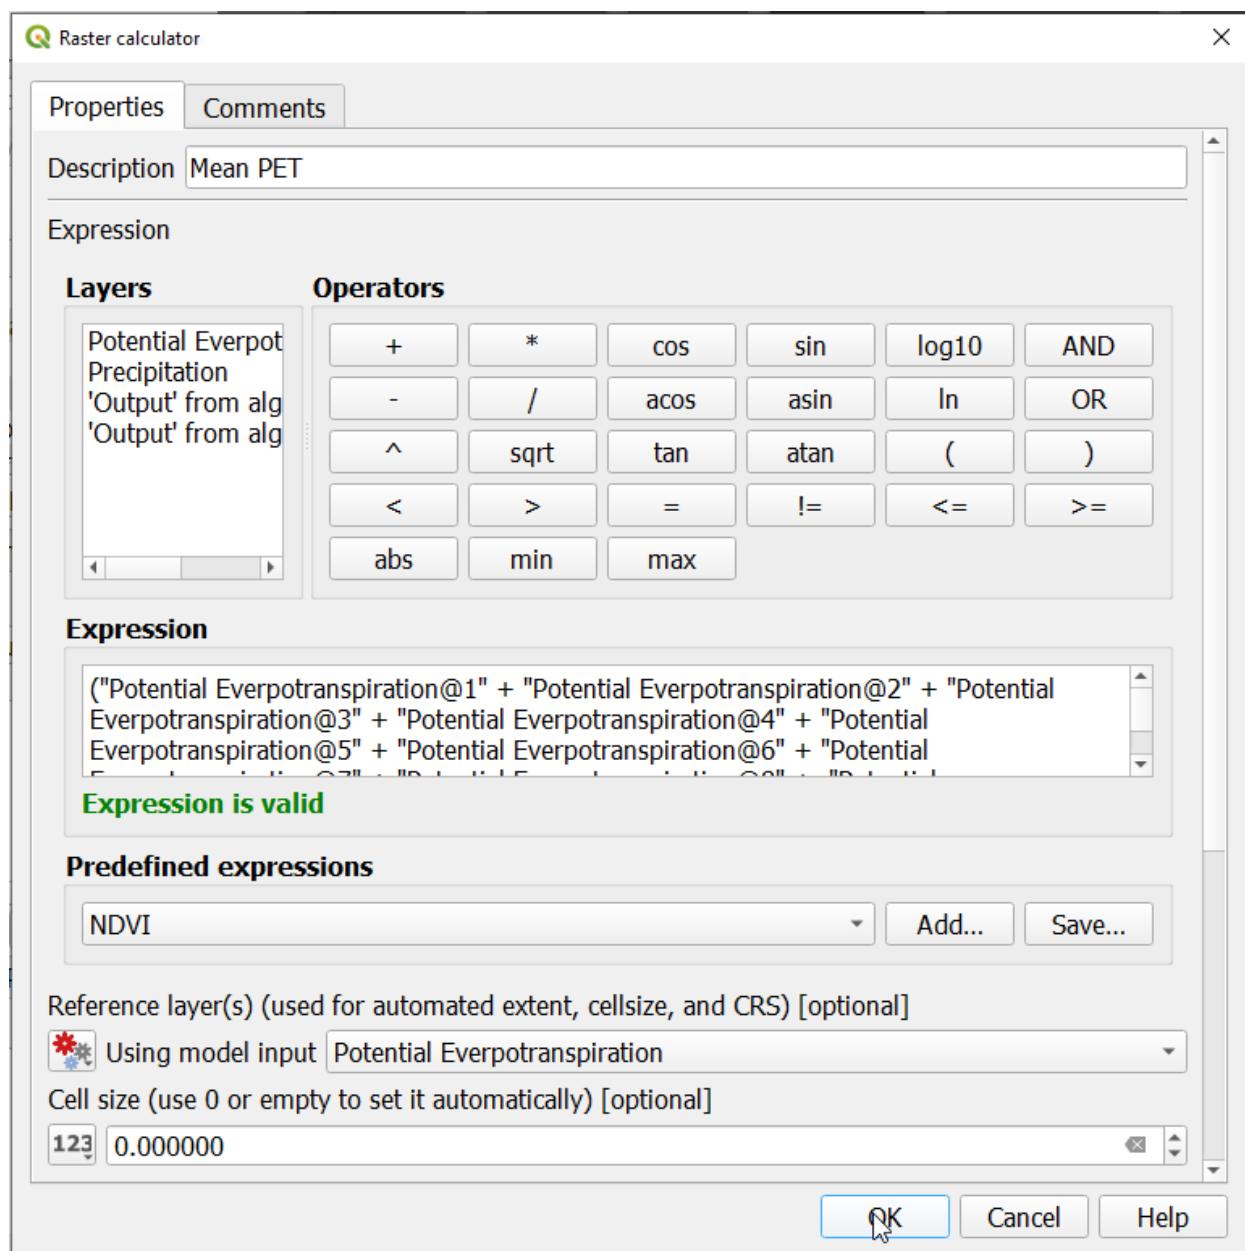

Algorithm Input and Output parameters

In all cases, you will find an additional parameter named *Dependencies* that is not available when calling the algorithm from the toolbox. This parameter allows you to define the order in which algorithms are executed, by explicitly defining one algorithm as a *parent* of the current one. This will force the *parent* algorithm to be executed before the current one.


When you use the output of a previous algorithm as the input of your algorithm, that implicitly sets the previous algorithm as parent of the current one (and places the corresponding arrow in the modeler canvas). However, in some cases an algorithm might depend on another one even if it does not use any output object from it (for instance, an algorithm that executes a SQL sentence on a PostGIS database and another one that imports a layer into that same database). In that case, just select the previous algorithm in the *Dependencies* parameter and they will be executed in the correct order.

Once all the parameters have been assigned valid values, click on OK and the algorithm will be added to the canvas. It will be linked to the elements in the canvas (algorithms or inputs) that provide objects that are used as inputs for the algorithm.

Elements can be dragged to a different position on the canvas. This is useful to make the structure of the model more clear and intuitive. You can also resize elements. This is particularly useful if the description of the input or algorithm is long.

Links between elements are updated automatically and you can see a plus button at the top and at the bottom of each algorithm. Clicking the button will list all the inputs and outputs of the algorithm so you can have a quick overview.

You can zoom in and out by using the mouse wheel.

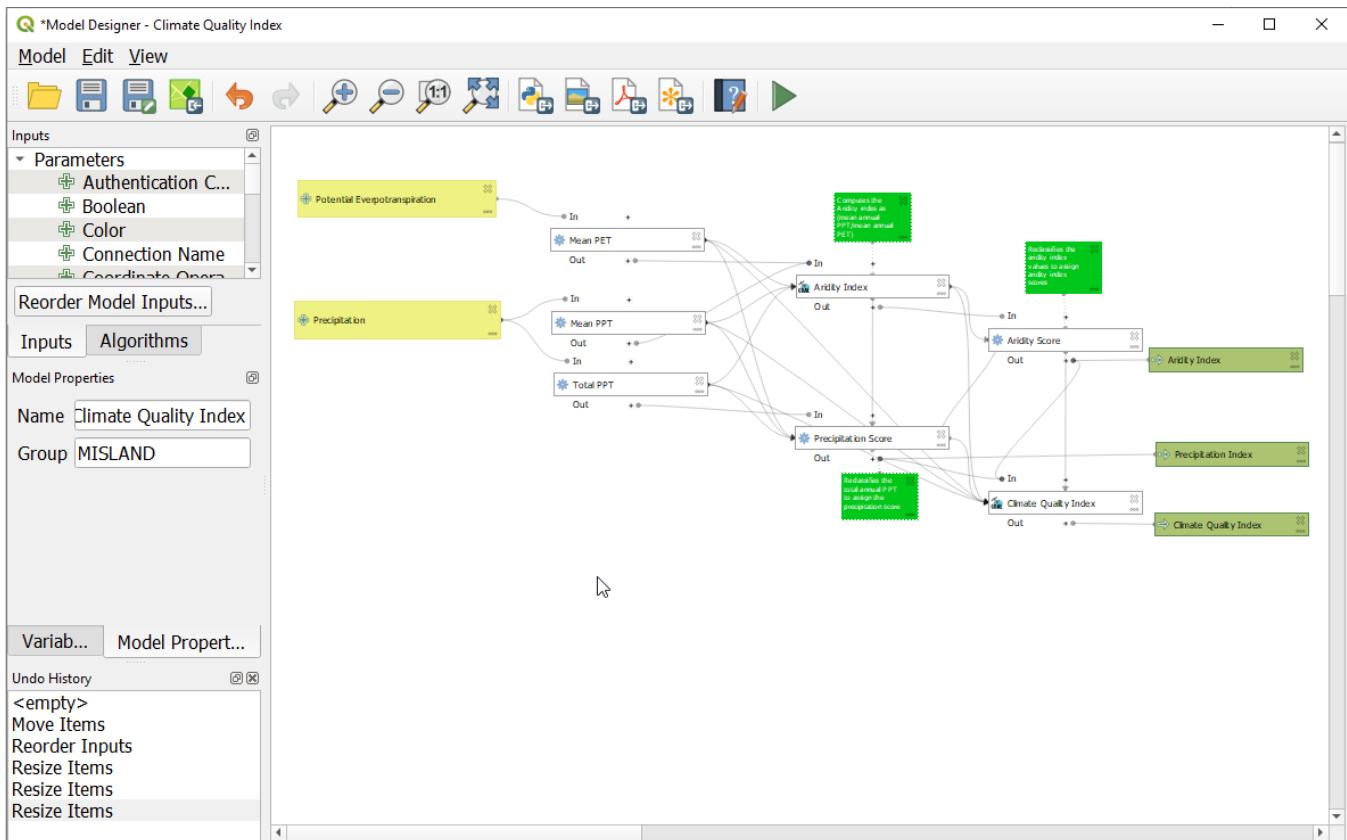

A complete model

You can run your algorithm any time by clicking on the button. In order to use the algorithm from the toolbox, it has to be saved and the modeler dialog closed, to allow the toolbox to refresh its contents.

Interacting with the canvas and elements

You can use the , , and buttons to zoom the modeler canvas. The behavior of the buttons is basically the same of the main QGIS toolbar.

Data Preparation Models


The Undo History panel together with the and buttons are extremely useful to quickly rollback to a previous situation. The Undo History panel lists everything you have done when creating the workflow.

You can move or resize many elements at the same time by first selecting them, dragging the mouse.

If you want to snap the elements while moving them in the canvas you can choose View ■ Enable Snapping.

The Edit menu contains some very useful options to interact with your model elements:

- Select All: select all elements of the model
- Snap Selected Components to Grid: snap and align the elements into a grid
- Undo: undo the last action
- Redo: redo the last action
- Cut: cut the selected elements
- Copy: copy the selected elements
- Paste: paste the elements
- Delete Selected Components: delete all the selected elements from the model
- Add Group Box: add a draggable *box* to the canvas. This feature is very useful in big models to group elements in the modeler canvas and to keep the workflow clean. For example we might group together all the inputs of the example:

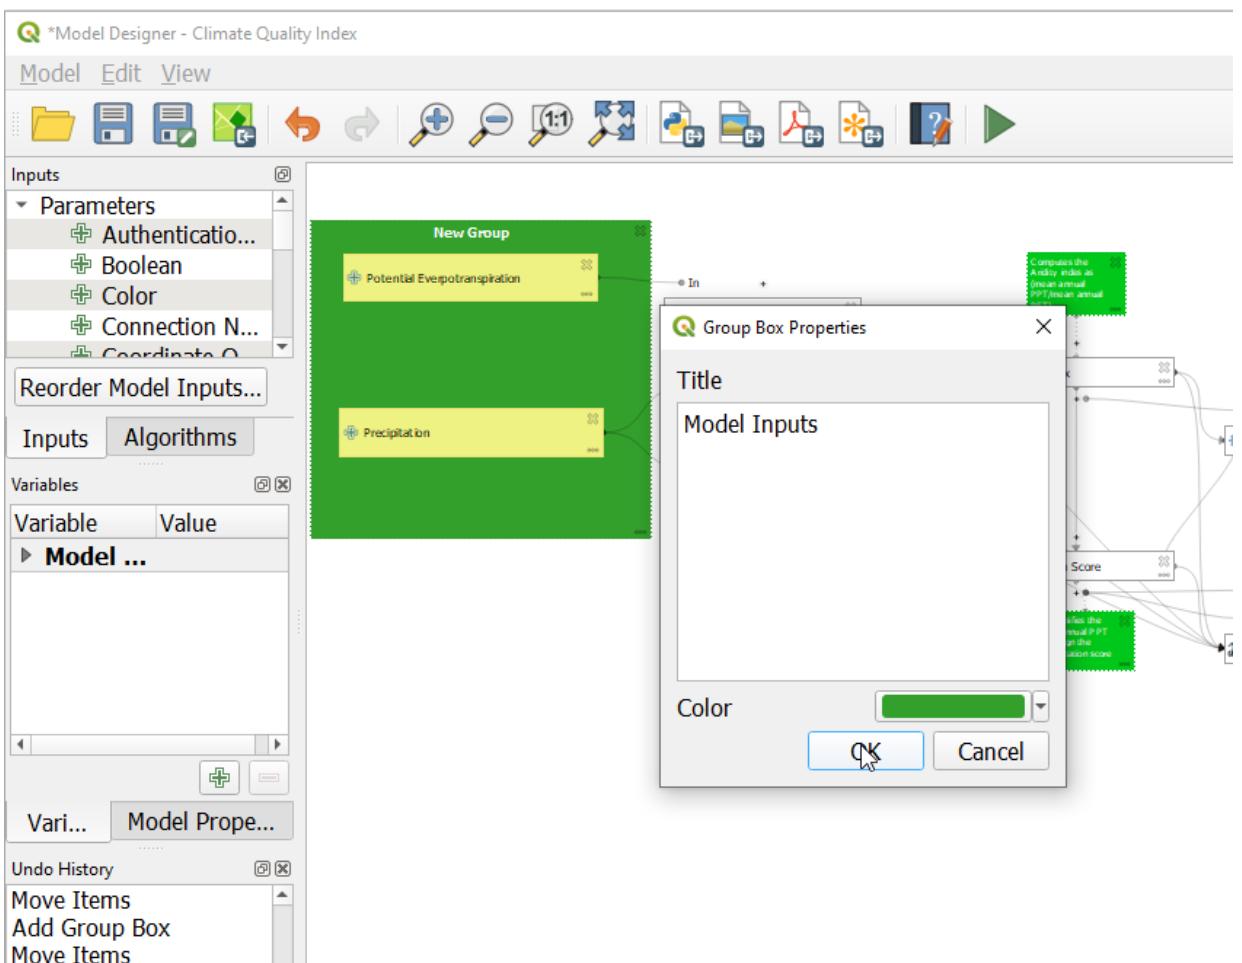


Model Group Box

You can change the name and the color of the boxes. Group boxes are very useful when used together with View ■ Zoom To. This allows you to zoom to a specific part of the model.

You might want to change the order of the inputs and how they are listed in the main model dialog. At the bottom of the Input panel you will find the Reorder Model Inputs... button and by clicking on it a new dialog pops up allowing you to change the order of the inputs:

Data Preparation Models

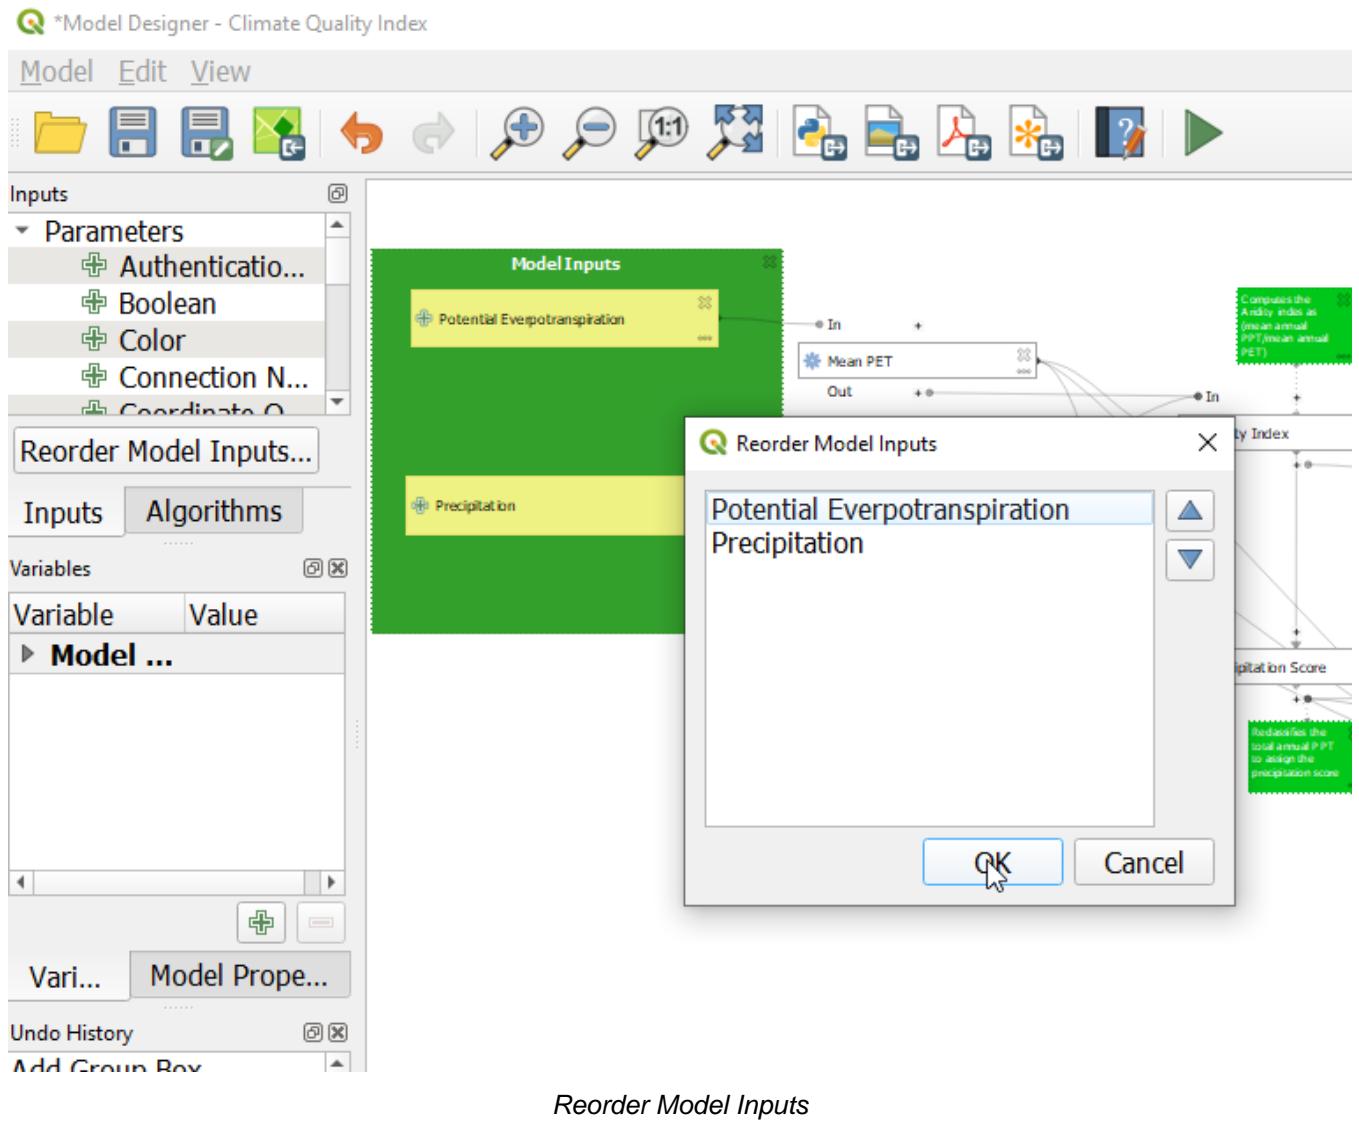

Reorder Model Inputs

Saving and loading models

Use the **Save model** button to save the current model and the **Open Model** button to open a previously saved model. Models are saved with the .model3 extension. If the model has already been saved from the modeler window, you will not be prompted for a filename. Since there is already a file associated with the model, that file will be used for subsequent saves.

Before saving a model, you have to enter a name and a group for it in the text boxes in the upper part of the window.

Models saved in the models folder (the default folder when you are prompted for a filename to save the model) will appear in the toolbox in the corresponding branch. When the toolbox is invoked, it searches the models folder for files with the .model3 extension and loads the models they contain. Since a model is itself an algorithm, it can be added to the toolbox just like any other algorithm.

Models can also be saved within the project file using the **Save model in project** button. Models saved using this method won't be written as .model3 files on the disk but will be embedded in the project file.

Project models are available in the **Project models** menu of the toolbox.

The models folder can be set from the Processing configuration dialog, under the Modeler group.

Models loaded from the models folder appear not only in the toolbox, but also in the algorithms tree in the Algorithms tab of the modeler window. That means that you can incorporate a model as a part of a bigger model, just like other algorithms.

Models will show up in the **Browser** panel and can be run from there.


Exporting a model as an image, PDF or SVG

A model can also be exported as an image, SVG or PDF (for illustration purposes) by clicking Export as image, Export as PDF or Export as SVG.


Editing a model

You can edit the model you are currently creating, redefining the workflow and the relationships between the algorithms and inputs that define the model.

If you right-click on an algorithm in the canvas, you will see a context menu like the one shown next:

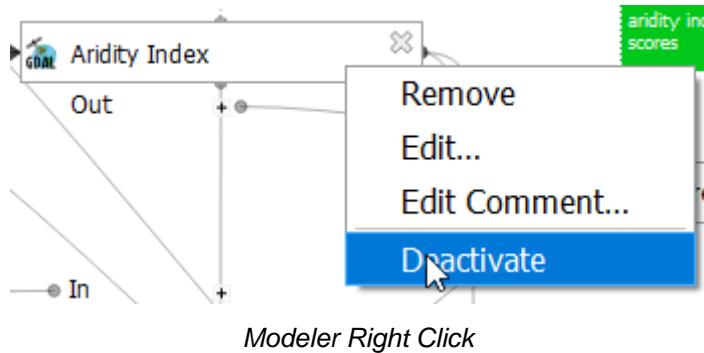

Selecting the Remove option will cause the selected algorithm to be removed. An algorithm can be removed only if there are no other algorithms depending on it. That is, if no output from the algorithm is used in a different one as input. If you try to remove an algorithm that has others depending on it, a warning message like the one you can see below will be shown:

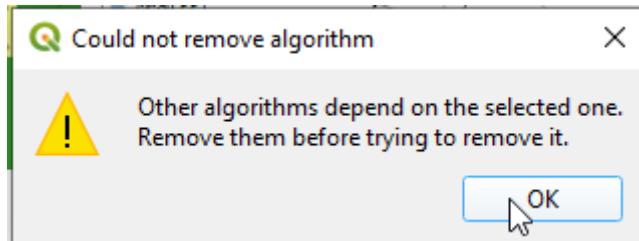


Selecting the Edit... option will show the parameter dialog of the algorithm, so you can change the inputs and parameter values. Not all input elements available in the model will appear as available inputs. Layers or values generated at a more advanced step in the workflow defined by the model will not be available if they cause circular dependencies.

Select the new values and click on the OK button as usual. The connections between the model elements will change in the modeler canvas accordingly.

The Add comment... allows you to add a comment to the algorithm to better describe the behavior.

A model can be run partially by deactivating some of its algorithms. To do it, select the Deactivate option in the context menu that appears when right-clicking on an algorithm element. The selected algorithm, and all the ones in the model that depend on it will be displayed in grey and will not be executed as part of the model.

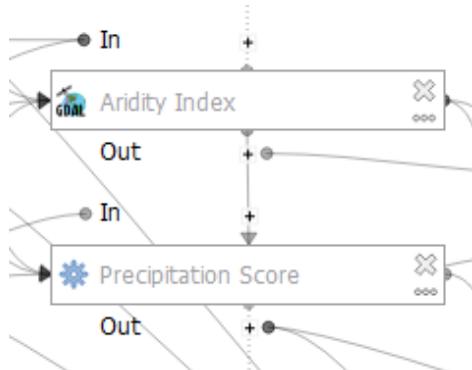


Model With Deactivated Algorithms

When right-clicking on an algorithm that is not active, you will see a **Activate** menu option that you can use to reactivate it.

Editing model help files and meta-information

You can document your models from the modeler itself. Click on the  **Edit model help** button, and a dialog like the one shown next will appear.

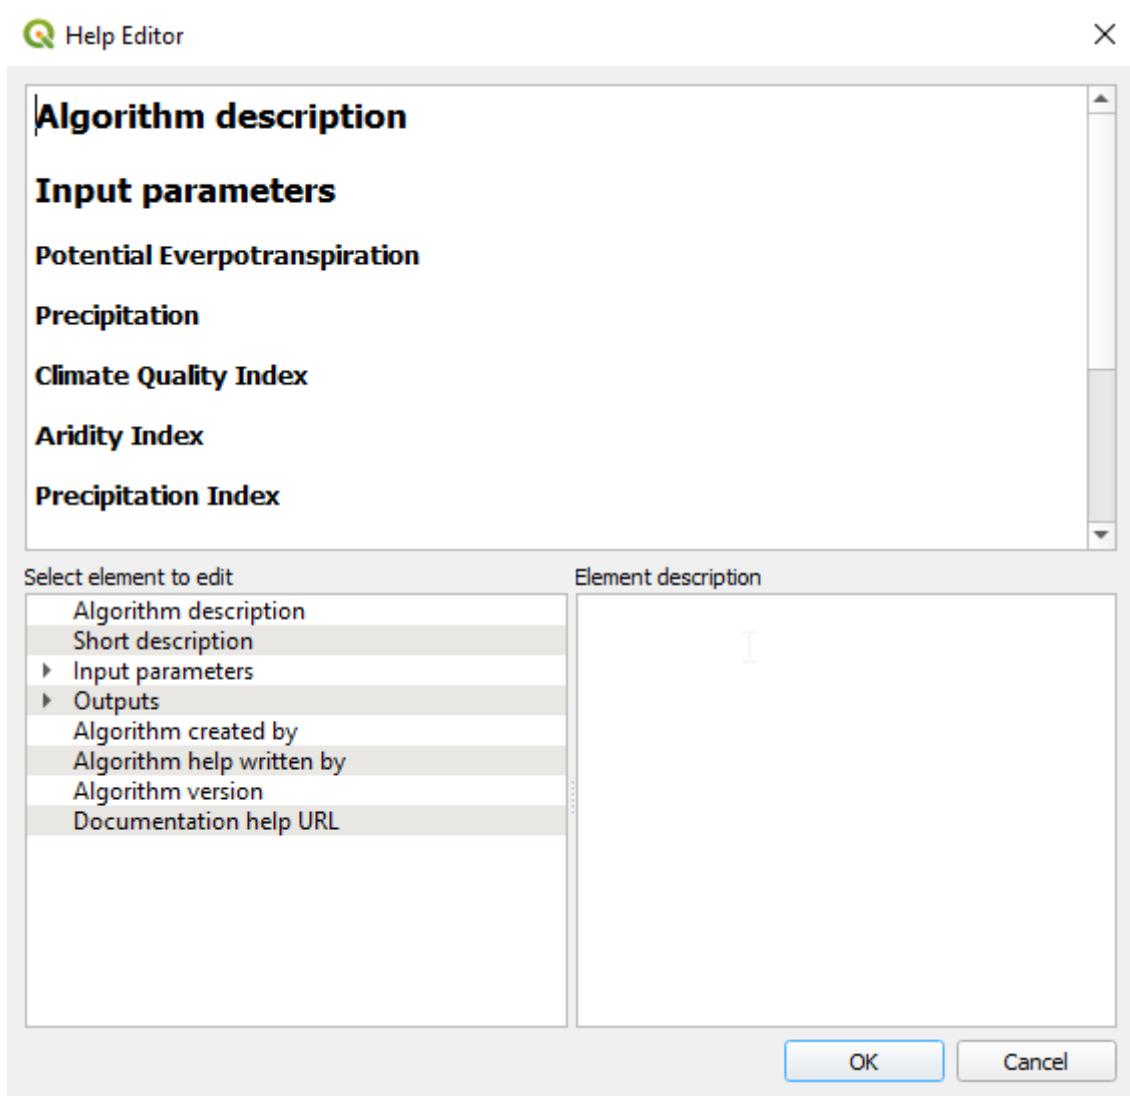

Editing Help

On the right-hand side, you will see a simple HTML page, created using the description of the input parameters and outputs of the algorithm, along with some additional items like a general description of the model or its author. The first time you open the help editor, all these descriptions are empty, but you can edit them using the elements on the left-hand side of the dialog. Select an element on the upper part and then write its description in the text box below.


Model help is saved as part of the model itself.

Exporting a model as a Python script

As we will see in a later chapter, Processing algorithms can be called from the QGIS Python console, and new Processing algorithms can be created using Python. A quick way to create such a Python script is to create a model and then export it as a Python file.

To do so, click on the  **Export as Script Algorithm...** in the modeler canvas or right click on the name of the model in the Processing Toolbox and choose  **Export Model as Python Algorithm...**.

Introduction to MISLAND

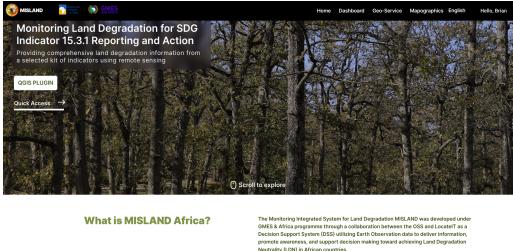

Misland Homepage

MISLAND Africa is an operational instrument relying on the international standards for reporting SDG 15.3.1 and technical approaches allowing the delivery of regular information on vegetation cover gain/loss to decision makers and environmental agencies at the first place.

The core-service provides land degradation indicators for Five African regions at two levels:

- At the regional level where low and medium resolution EO are used.
- At the pilot site level, where(customized indicators) can be developed, using medium resolution data(landsat time series imagery and derived vegetation indices, combined with different satellite-derived climate data)

Vegetation Indices

MODIS NDVI

Data download from Google Earth Engine

The MOD13Q1 V6 product provides a Vegetation Index (VI) value at a per pixel basis. There are two primary vegetation layers. The first is the Normalized Difference Vegetation Index (NDVI) which is referred to as the continuity index to the existing National Oceanic and Atmospheric Administration-Advanced Very High Resolution Radiometer (NOAA-AVHRR) derived NDVI. The second vegetation layer is the Enhanced Vegetation Index (EVI) that minimizes canopy background variations and maintains sensitivity over dense vegetation conditions. The MODIS NDVI and EVI products are computed from atmospherically corrected bi-directional surface reflectances that have been masked for water, clouds, heavy aerosols, and cloud shadows.

To compute and download the mean annual MODIS NDVI data from google earth engine. Open the [Google Earth Engine Code](#) and paste the lines of code provided below

```

1  ***** Start of imports. If edited, may not auto-convert in the playground. *****
2  var table = ee.FeatureCollection("projects/ee-briansimiyu/assets/Africa_shapefile");
3  ***** End of imports. If edited, may not auto-convert in the playground. *****
4  var dataset = ee.ImageCollection('MODIS/006/MOD13Q1')
5      .filter(ee.Filter.date('2018-01-01', '2019-01-01'))
6      .mean()
7      .clip(table);
8
9  var ndvi = dataset.select('NDVI');
10 var ndviVis = {
11     min: 0.0,
12     max: 8000.0,
13     palette: [
14         'FFFFFF', 'CE7E45', 'DF923D', 'F1B555', 'FCD163', '99B718', '74A901',
15         '66A000', '529400', '3E8601', '207401', '056201', '004C00', '023B01',
16         '012E01', '011D01', '011301'
17     ],
18 };
19 Map.centerObject(table);

```

```

20     Map.addLayer(ndvi, ndviVis, 'NDVI');
21
22     Export.image.toCloudStorage({
23       image:ndvi,
24       description: 'NDVI',
25       maxPixels:1e13,
26       scale:250,
27       bucket:'oss_ldms_vi',
28       region:table
29     })

```

Landsat derived NDVI, MSAVI, SAVI

Data download from Google Earth Engine

Several annual NDVI composite techniques have been discussed to overcome current Landsat 5 artifacts. MISLAND uses annual NDVI products based on different percentiles in order to better qualify and quantify the Vegetation Loss Index.

To compute and download desired percentile composites from google earth engine. Open the [Google Earth Engine Code](#) and paste the lines of code provided below

```

1  // Required Data Inputs
2  // =====
3  // * USGS/NASA's Landsat 4 surface reflectance tier 1 dataset (August 1982 - December 1982)
4  // * USGS/NASA's Landsat 5 surface reflectance tier 1 dataset (January 1, 1984 - March 31, 1984)
5  // * USGS/NASA's Landsat 7 surface reflectance tier 1 dataset (January 1, 1999 - December 31, 1999)
6  // * USGS/NASA's Landsat 8 surface reflectance tier 1 dataset (April 11, 2013 - December 31, 2016)
7  // * Study Area Polygon
8
9  var countries = ee.FeatureCollection("USDOS/LSIB_SIMPLE/2017");
10
11 var Year='2000'
12
13
14 var country = 'Libya';
15 var ALGO = "PERCENTILE65"; // PERCENTILE75 // PERCENTILE65 // PERCENTILE60 // MEDIAN
16 var cloudCoveragePercentage = 80;
17
18
19 var studyArea = countries.filter(ee.Filter.eq('country_na',country ))
20 //Map.addLayer(studyArea);
21
22 /*
23 borders are quite coarse
24 var northAfrica = ee.FeatureCollection('users/derickongeri/Admin')
25 var country = 'TUNISIA';
26 var studyArea = northAfrica.filter(ee.Filter.eq('NAME', country))
27 Map.addLayer(studyArea);
28 */
29
30
31
32
33 var start_date = Year+ '-01-01';
34 var end_date = Year+ '-12-31';
35
36
37 //-----
38 //      Landsat 4, 5, 7 cloudmask

```

```

39 //-----
40
41 // If the cloud bit (5) is set and the cloud confidence (7) is high
42 // or the cloud shadow bit is set (3), then it's a bad pixel.
43 var cloudMaskL7 = function(image) {
44   var qa = image.select('QA_PIXEL');
45   var cloud = qa.bitwiseAnd(1 << 5)
46     .and(qa.bitwiseAnd(1 << 7))
47     .or(qa.bitwiseAnd(1 << 3));
48
49   // Remove edge pixels that don't occur in all bands
50   //var mask2 = image.mask().reduce(ee.Reducer.min())//.focal_min(300,'square','met
51   //var mask2 = image.select('B4').reduce(ee.Reducer.min()).gt(0)//.focal_min(500,'
52   // Remove edge pixels that don't occur in all bands
53   var mask3 =
54     (image.select('B3').gt(100))
55     .and(image.select('B4').gt(100))
56
57
58   .and(image.select('B4').lt(10000))
59   .and(image.select('B3').lt(10000))
60
61
62
63   return image.updateMask(cloud.not()).updateMask(mask3)//.updateMask(mask2)//.clip(
64 }
65
66
67 var cloudMaskL45 = function(image) {
68   var qa = image.select('QA_PIXEL');
69   var cloud = qa.bitwiseAnd(1 << 5)
70     .and(qa.bitwiseAnd(1 << 7))
71     .or(qa.bitwiseAnd(1 << 3));
72
73   // Remove edge pixels that don't occur in all bands
74   //var mask2 = image.mask().reduce(ee.Reducer.min());
75   var mask2 =
76     (image.select('B3').gt(100))
77     .and(image.select('B4').gt(100))
78
79
80   .and(image.select('B4').lt(10000))
81   .and(image.select('B3').lt(10000))
82
83   return (image.updateMask(cloud.not()).updateMask(mask2))//.clip(image.geometry()).
84 }
85
86
87 //-----
88 //      Landsat 8 cloudmask
89 //-----
90
91 // Bits 3 and 5 are cloud shadow and cloud, respectively.
92 function maskL8sr(image) {
93   var cloudShadowBitMask = (1 << 3);
94   var cloudsBitMask = (1 << 5);
95
96   // Get the pixel QA band.
97   var qa = image.select('pixel_qa');
98

```

```

99          // Both flags should be set to zero, indicating clear conditions.
100         var mask = qa.bitwiseAnd(cloudShadowBitMask).eq(0)
101             .and(qa.bitwiseAnd(cloudsBitMask).eq(0));
102         var mask2 =
103
104             (image.select('B5').gt(100))
105             .and(image.select('B4').gt(100))
106
107             .and(image.select('B5').lt(10000))
108             .and(image.select('B4').lt(10000))
109
110         //var mask2 = image.mask().reduce(ee.Reducer.min()).focal_min(500,'square','mete
111         //return image
112         return image.updateMask(mask).updateMask(mask2)//.clip(image.geometry().buffer(-5
113     }
114
115
116
117
118
119         // Apply Cloudmask to L4.5.7
120         var L4 = ee.ImageCollection("LANDSAT/LT04/C02/T2_TOA")
121             .filterDate(start_date, end_date)
122             .filter(ee.Filter.lessThan('CLOUD_COVER_LAND', cloudCoveragePercentag
123             .filterBounds(studyArea)
124             .map(cloudMaskL45)
125             .select(['B3', 'B4'], ['RED', 'NIR']));
126
127         var L5 = ee.ImageCollection('LANDSAT/LT05/C02/T2_TOA')
128             .filterDate(start_date, end_date)
129             .filter(ee.Filter.lessThan('CLOUD_COVER_LAND', cloudCoveragePercentag
130             .filterBounds(studyArea)
131             .map(cloudMaskL45)
132             .select(['B3', 'B4'], ['RED', 'NIR']));
133
134         var L7a = ee.ImageCollection('LANDSAT/LE07/C02/T2_TOA')
135             .filterDate('1999-01-01', '2003-04-01')
136             .filterDate(start_date, end_date)
137             .filter(ee.Filter.lessThan('CLOUD_COVER_LAND', 100))
138             .filterBounds(studyArea)
139             .map(cloudMaskL7)
140             .select(['B3', 'B4'], ['RED', 'NIR']);
141         var L7b = ee.ImageCollection('LANDSAT/LE07/C02/T2_TOA')
142             .filterDate('2012-01-01', '2013-12-31')
143             .filterDate(start_date, end_date)
144             .filter(ee.Filter.lessThan('CLOUD_COVER_LAND', 100))
145             .filterBounds(studyArea)
146             .map(cloudMaskL7)
147             .select(['B3', 'B4'], ['RED', 'NIR']);
148
149         var L7 = L7a.merge(L7b);
150
151         var L8 = ee.ImageCollection('LANDSAT/LC08/C02/T2_TOA')
152             .filterDate(start_date, end_date)
153             .filter(ee.Filter.lessThan('CLOUD_COVER', cloudCoveragePercentage
154             .filterBounds(studyArea)
155             //filterBounds(AOI)
156             .map(maskL8sr)
157             .select(['B4', 'B5'], ['RED', 'NIR']));
158

```

```

159
160
161
162
163
164     //Define collection
165
166
167 //-----
168 // Merge Landsat 4, 5, 8 imagery collections and filter all by date/place
169 //-----
170
171 //Merge Landsat 4, 5 , 7 '
172
173 var L4578 = L4.merge(L5).merge(L7).merge(L8);
174 print(L4578)
175
176
177 //-----
178 //           Create NDVI Collection
179 //-----
180
181 var NDVI = function(image) {
182   return image.normalizedDifference(['NIR', 'RED']).rename('NDVI');
183   //return image.addBands(ndvi);
184 }
185
186 if (ALGO=='MEDIAN'){
187   var suffix = 'median';
188   var annualNDVI = L4578.map(NDVI).median().clip(studyArea);
189 }
190
191 if (ALGO=='PERCENTILE75'){
192   var suffix = '75pc';
193   var annualNDVI = L4578.map(NDVI).reduce(ee.Reducer.percentile([75])).clip(studyArea);
194 }
195
196 if (ALGO=='PERCENTILE65'){
197   var suffix = '65pc';
198   var annualNDVI = L4578.map(NDVI).reduce(ee.Reducer.percentile([65])).clip(studyArea);
199 }
200
201
202 var ndvi_visualization = {
203   min: -0.22789797020331423,
204   max: 0.6575894075894075,
205   palette: 'FFFFFF, CE7E45, DF923D, F1B555, FCD163, 99B718, 74A901, 66A000, 529400,
206   '3E8601, 207401, 056201, 004C00, 023B01, 012E01, 011D01, 011301'
207 };
208 Map.addLayer(annualNDVI, ndvi_visualization, 'NDVI');
209
210 //-----
211 //           Export as GeoTIFF
212 //-----
213
214
215 Export.image.toDrive({
216   image: annualNDVI,
217   description: country + '_NDVI_' + suffix + '_' + Year,
218   scale: 30,

```

```

219     region: studyArea,
220     maxPixels: 1e13,
221     fileFormat: 'GeoTIFF',
222     folder: 'GEE_classification',
223     formatOptions: {
224       cloudOptimized: true
225     },
226     skipEmptyTiles: true
227   );
228
229   //Map.addLayer(L7.first(), {}, 'L7');

```

Landcover Data Preparation

MISLAND Africa uses the European Space Agency (ESA) Climate Change Initiative (CCI) land cover dataset. This dataset provides global maps describing the land surface into 22 classes, which have been defined using the United Nations Food and Agriculture Organization's (UN FAO) Land Cover Classification System (LCCS). In addition to the land cover (LC) maps, four quality flags are produced to document the reliability of the classification and change detection. In order to ensure continuity, these land cover maps are consistent with the series of global annual LC maps from the 1990s to 2015 produced by the European Space Agency (ESA) Climate Change Initiative (CCI), which are also available on the ESA CCI LC viewer.

The dataset can be downloaded here from the [ESA C3S archives](#)

Data Processing and Download in GEE

This Google Earth Engine (GEE) script performs land cover classification across the entire African continent using the ESA Climate Change Initiative (CCI) land cover dataset. The data spans from 1992 to 2018, with this analysis specifically targeting the year 2018.

Key processing steps include:

- **Clipping** the global ESA CCI land cover image to the African continent boundary defined by a custom `Africa_shapefile` FeatureCollection.
- **Cleaning** the dataset by replacing invalid land cover values (9999) with a no-data placeholder (-32768) and masking them out.
- **Reclassifying** the original ESA land cover classes into seven broad IPCC land use/land cover (LULC) categories. This harmonization is useful for standardized climate reporting and environmental assessments.
- **Visualizing** the resulting classified land cover image in the GEE map viewer.
- **Exporting** the processed image as a Cloud-Optimized GeoTIFF (COG) to Google Drive, with the following settings: - Coordinate Reference System: EPSG:4326 (WGS 84) - Spatial resolution: 300 meters - Region: Entire African continent - Skipping of empty tiles to optimize storage and export speed

This script enables large-scale monitoring of land cover dynamics and supports regional to continental-scale reporting on land use trends, degradation, and policy-relevant indicators.

Script

```

var africa = ee.FeatureCollection("projects/ee-briansimiyu/assets/Africa_shapefile");

// Land cover data from ESA CCI
var lc = ee.Image("users/geflanddegradation/toolbox_datasets/lcov_esacc_1992_2018");
var lc = lc.where(lc.eq(9999), -32768);
var lc = lc.updateMask(lc.neq(-32768));
var lc = lc.clip(africa);

print(lc);

var matrix = [10, 11, 12, 20, 30, 40, 110, 120, 121, 122, 130, 140, 150, 151, 152, 153,
              50, 60, 61, 62, 70, 71, 72, 80, 81, 82, 90, 100, 160, 170, 180, 190, 200,
              201, 202, 220, 210];
var matrix2 = [5,5,5,5,5,6,6,6,6,6,6,6,6,6,6,6,7,7,7,7,7,7,7,7,7,7,7,7,7,7,4,4,4,3,2,2,2,2,1];

// Reclassify to 7 IPCC classes
var lc_t0 = lc.select('y2018')
    .remap(matrix, matrix2);


Map.addLayer(lc_t0, {}, 'Landcover');

Export.image.toDrive({
  image: lc_t0,
  description: 'Landcover',
  crs: 'EPSG:4326',
  scale: 300,
  region: africa,
  maxPixels: 1e13,
  fileFormat: 'GeoTIFF',
  folder: 'LC_',
  formatOptions: {
    cloudOptimized: true
  },
  skipEmptyTiles: true
});

```


Data Preprocessing Steps in QGIS

1. Unzip the C3S-LC-L4-LCCS-Map-300m-P1Y-yyyy-v2.1.1 data from the compressed format that it comes in after downloading. Closely examine the contents of this folder as it has various files.

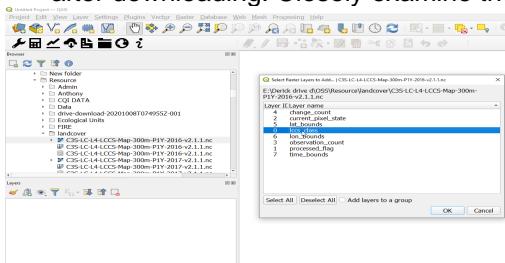


Rasters option on admin panel

2. Load the unzipped NetCDF4 raster onto qgis and select the lccs_class on the “Select Raster Layers to Add” dialog.




Extraction by mask

- 3 . Once the raster layer is loaded add the vector layer of the OSS region and navigate to Raster > Extraction > Clip Raster by Mask Layer

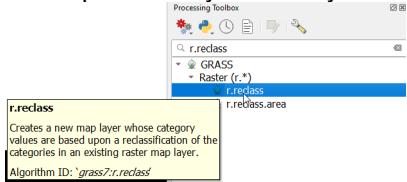


Finding the r.reclass processing tool

- 4 . Once the raster layer has been clipped to the area of interest, open the processing toolbox and search for r.reclass and select the GRASS>Raster>r.reclass tool.

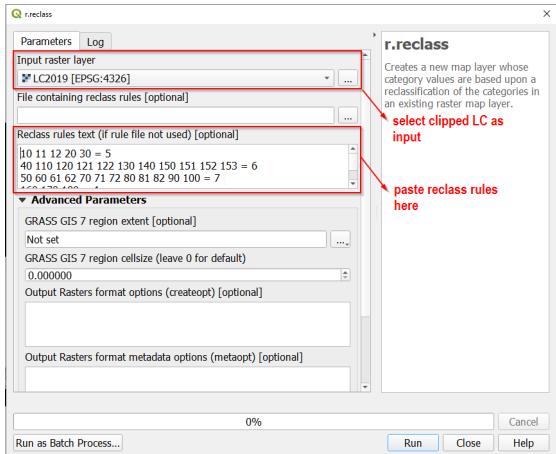


Finding the r.reclass processing tool

- 5 . On the r.reclass dialog that pops up, select the clipped land cover data as the input layer and paste the following reclassification rules into the “Reclass rules text box” and save the output in a desired location.

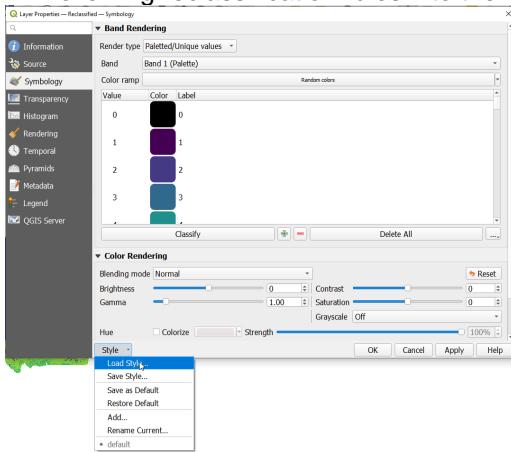

Finding the r.reclass processing tool

- 6 . Once the data is reclassified you can upload the QML style layer to visualize and validate the reclassified land cover data.

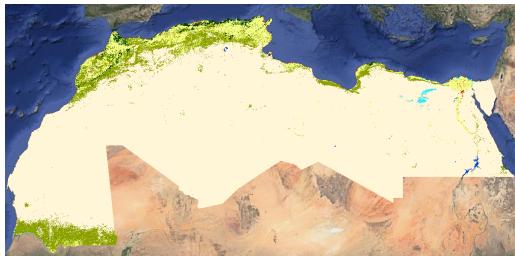

Finding the r.reclass processing tool

Data Upload to MISLAND service

To upload the Land cover dataset to the admin panel. Follow these simple steps

- 1 . Select the **Rasters** option from the list of options on the admin panel

The screenshot shows the 'Site administration' interface with a dark blue header bar. Below it is a light gray sidebar containing a list of administrative options: Groups, LDMS, Admin level ones, Admin level twos, Admin level zeros, Computation thresholds, Custom shape files, Gallery, Questions, Rasters (which is highlighted with a mouse cursor), Regional admin levels, Scheduled tasks, System Settings, and Topics. Each item has an 'Add' and 'Change' button next to it.

Rasters option on admin panel

- 2 From the **FILTER** options, *By raster type* select **LULC: Land use/land Cover** option to view the list of Land cover datasets that are already available on the database

The screenshot shows a 'FILTER' interface. On the left, there's a 'RASTER SOURCE' section with several collapsed categories. On the right, a 'By raster type' dropdown menu is open, listing various options: All, LULC: Land use / land cover, SOC: Soil Organic Carbon, NDVI: Normalized Difference Vegetation Index, Rainfall: Rainfall, Ecological Units: Ecological Units, Forest Loss: Forest Loss, MSAVI: Modified Soil-Adjusted Vegetation Index, SAVI: Soil-Adjusted Vegetation Index, Evapotranspiration: Evapotranspiration, and Aspect: Aspect. The 'LULC: Land use / land cover' option is highlighted with a mouse cursor.

Selecting Land cover option from the list of filters

- 3 . Once you have confirmed that the raster you wish to add is not in the database. Select the **ADD RASTER** option from the top-right corner of the admin panel.

The screenshot shows the same 'FILTER' interface as before, but now the 'ADD RASTER' button at the top right is highlighted with a mouse cursor.

Selecting 'ADD RASTER' option

- 4 . On the add raster form that opens up, fill in the **Name** of the Land cover raster you wish to add, then select the **Raster Year** and the **Raster Type** as shown below:

The screenshot shows the 'Add raster' form. It includes fields for 'Name' (containing 'LC 2019'), 'Description' (empty), 'Raster year' (set to '2019'), 'Raster type' (set to 'LULC: Land use / land cover'), 'Raster category' (showing a dropdown menu with 'LULC: Land use / land cover' selected), 'Rasterfile' (empty), and 'Uperleftx' (empty). The 'Raster type' dropdown menu lists the same options as the one in the previous screenshot: All, LULC: Land use / land cover, SOC: Soil Organic Carbon, NDVI: Normalized Difference Vegetation Index, Rainfall: Rainfall, Ecological Units: Ecological Units, Forest Loss: Forest Loss, MSAVI: Modified Soil-Adjusted Vegetation Index, SAVI: Soil-Adjusted Vegetation Index, Evapotranspiration: Evapotranspiration, and Aspect: Aspect.

Filling the ADD RASTER form for land cover data upload

Note

It is recommended that you include the Year of the raster in the *Name* field as shown and that you associate the Land cover raster with the **LULC: Land use/land cover** *Raster Type* for the system to work properly and point to the right raster dataset.

Forest Loss

The High-resolution global forest change results from time-series analysis of Landsat images in characterizing global forest extent and change.

The 'first' and 'last' bands are reference multispectral imagery from the first and last available years for Landsat spectral bands 3, 4, 5, and 7. Reference composite imagery represents median observations from a set of quality-assessed growing-season observations for each of these bands.

MISLAND Africa uses the Hansen Global Forest Change v1.8 to assess forest loss in the Africa action zone. For more details of the Hansen Global Forest Change see the [user notes](#)

Data Preprocessing and Download on GEE

1. Open the Google Earth Engine Code and paste the following code to import the **Hansen Global forest change v1.8, Misland Africa Action zone (study area) and Geometry** for forested areas in Africa.

```
1 var image = ee.Image("UMD/hansen/global_forest_change_2020_v1_8"),
2 table = ee.FeatureCollection("users/brianchellotti/Africa"),
3 geometry =
4 /* color: #d63000 */
5 /* shown: false */
6 /* displayProperties: [
7   {
8     "type": "rectangle"
9   }
10 */,
11 ee.Geometry.Polygon(
12   [[[ -10.330249200933336, 37.60222178276082 ],
13   [-10.330249200933336, 31.415726509598066 ],
14   [ 24.562328924066662, 31.415726509598066 ],
15   [ 24.562328924066662, 37.60222178276082 ]]], null, false);
```

2. To select the forestLoss by year band and export the product paste the following code.

```
1 var dataset = image.clip(table);
2
3 var forestLoss = dataset.select('lossyear');
4
5 Map.addLayer(forestLoss);
6
7 Export.image.toDrive({
8   image: forestLoss,
9   description: 'ForestLoss',
10  scale: 30,
11  region: geometry,
12  maxPixels: 1e13,
13  fileFormat: 'GeoTIFF',
14  folder: 'GEE_classification',
15  formatOptions: {
```

```


16      cloudOptimized: true
17  },
18  skipEmptyTiles: true
19 });

```

- Save the code and run it to export the forestloss by year data.


Data Preprocessing in Qgis

- Download the data from Google drive to your desired location on your local machine and load it to Qgis to view the outputs.

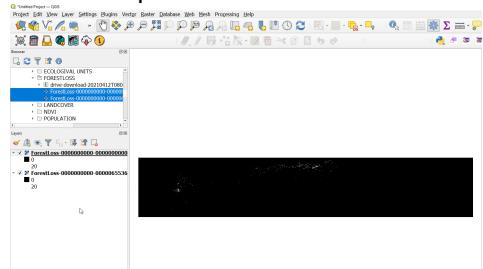


Opening the Forestloss year data on Qgis

- On the Qgis menu-bar navigate to *Raster>*Miscellaneous*>*Merge** to merge the downloaded tiles

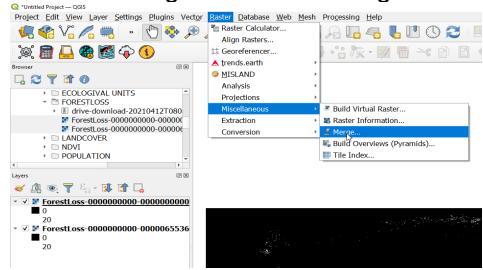

Merging the Forestloss year data

- On the Merge dialog, **Input layers** option choose the Select All option and click on OK.

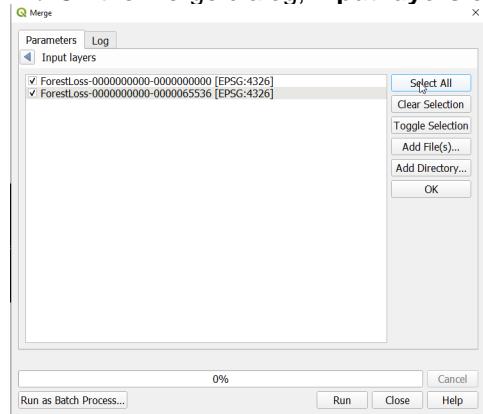

Selecting All layers to merge


save the output to a temporary layer so as to export it with desired properties in the next step.

- Right click on the layer and navigate to *Export > Save as* option and save the layer to your desired location with the appropriate name.

Ecological Units Layer

Note

The forest loss by year raster has values ranging from 1-20. The values represent the loss year from 2001 to 2020 hence to set the “nodata” value to 0 on the *Save Raster Layer* as dialog, check the **No data values** and input the values as shown in the figure below:

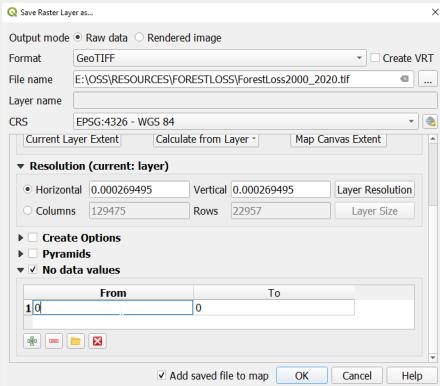

Saving the Forest Loss year data

Upload to MISLAND Service

Add raster

Name: Forest Loss Morocco

Description:

Raster year: 2000

Raster category: Forest Loss

Rasterfile: Choose File Morocco.Fo..000_2020.tif

Raster source: Hansen

Admin zero: Morocco


Resolution: 30

Uploading the data to MISLAND service

Ecological Units Layer

QGIS Data pre-processing steps


1. Open the land-cover and soil grids data on qgis

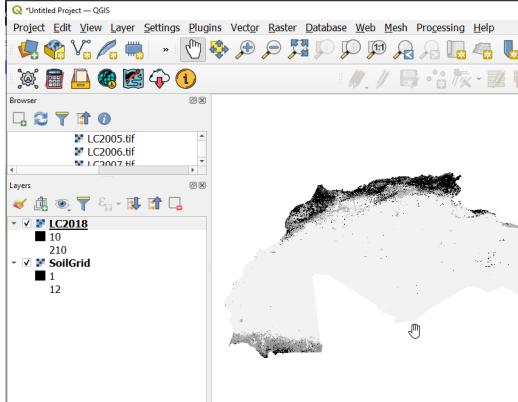

Ecological Units Layer


Loading the Landcover and Soil Grids on Qgis

- 2 . On the processing tool box, search for the *EcologicalUnitsModel* which will appear under **Models>**Land Productivity Models****




Finding the Ecological Unit Model

- 3 . On the dialog that pops up, select the Landcover and the soil grid data as the input data and run the model

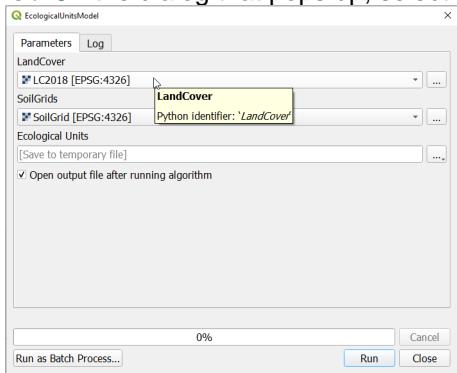


Ecological Unit Model dialog

Note

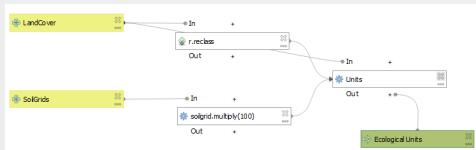

Ecological Unit Model summary

It is important that the dimensions of the Landcover data and the soil grids data are matching. This can be checked by right clicking on the layer and navigating to *properties>*Information**.

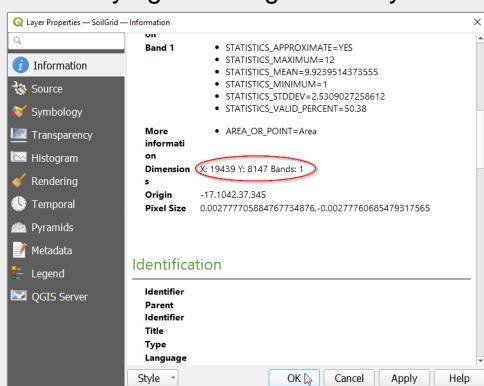

Checking the dimensions of the datasets

To match the dimensions of the two layers you can resample the soil grids to match the resolution of the Landcover data.


- 4 . On running the model successfully the units layer will be loaded onto Qgis as shown below



Climate Quality Index

Ecological Unit Model output

You can save the output from the Model to your desired location with the appropriate name

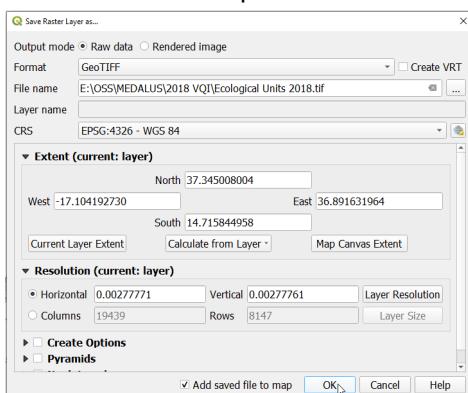

Saving the output

Uploading the Ecological Units to MISLAND Service

Add raster

Name: Ecological Units 2018

Description:

Raster year: 2018

Raster category: Ecological Units

Rasterfile: Choose File Eco_Unit_LC2018.tif

Raster source: LULC

Admin zero: — +

Resolution: 300

Data Upload Form

Climate Quality Index


Climate quality is assessed on the basis of how it influences water availability to the plants. Consideration has been given to the amount of rainfall, air temperature and aridity. Climate layers and relative scores are reported in Table 3. In particular the selected layers are: Annual precipitation (a crucial parameter in plant growth); Bagnouls-Gaussien aridity index (a synthesis of precipitation, evapotranspiration and run-off information); Slope aspect (affects microclimatic conditions and erosion).

Data Preprocessing in Qgis

- 1 . Open the downloaded Potential Evapotranspiration and Precipitation Datasets on Qgis.

Note


The two datasets are in **NetCDF** (Network Common Data Form) - a file format for storing multidimensional scientific data (variables) such as temperature, humidity, pressure, wind speed, and direction. Each of these variables can be displayed through a dimension (such as time) by making a layer or table view from the netCDF file. When loading the precipitation data select the **ppt** option on the *Select Raster Layers to Add* dialog that pops up.



Climate Quality Index


Selecting the Precipitation data to add to Qgis

The loaded layers, alongside the Misland Africa action zone shapefile should appear on the layers panel on Qgis as shown below

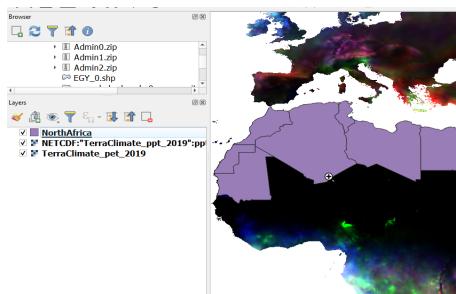


Loading the PPT and PET NetCDF files to Qgis

- 2 . Clip the layers to the desires study area by navigating to *Raster > Extraction > Clip Raster by Mask Layer* option on the Qgis Menu bar.

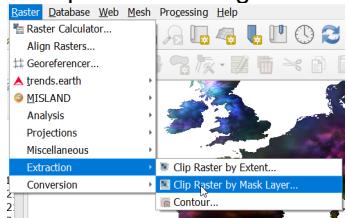


Clipping by Mask Layer

On the dialoge that pops up select the inputs as shown and specify the **Source CRS** and **target CRS** options as shown below. Save the outputs to your desired location before running the tool.

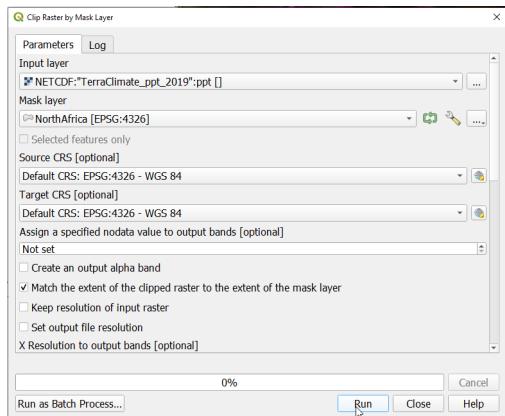

Clipping by Mask Layer

- 3 . Once the layers are successfully cliped and saved, open the Processing toolbox and type "Climate Quality Index" and select the *Climate Quality Index* mode under **Models**

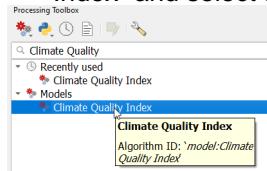

Climate Quality Index model


Select the proper inputs for the *Potential Evapotranspiration* and the *Precipitation*



Defining Inputs for the CQI model

Note

The CQI Model yeilds the Precipitation Index by computing the total annual precipitation and reclassifying the values. The Aridity Index is computed as the ration of the Mean annual precipitation and the potential evapotranspiration using the simple Penman-Monteith formulae. The process is as summarized in the graphical representation of the model shown below.

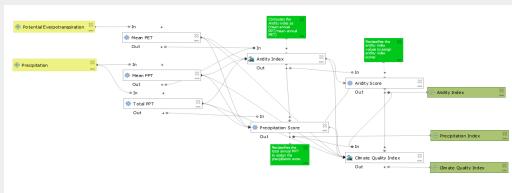


CQI Model graphical model

The classes for the precipitation and aridity index are obtained from: Ferrara, A*.., Kosmas, C., Salvati, L., Padula, A., Mancino, G., & Nolè, A. (2020). Updating the MEDALUS■ESA Framework for Worldwide Land Degradation and Desertification Assessment. *Land Degradation & Development*, 31(12), 1593-1607.


Aridity Index, Al _c	Score	Precipitation, mm yr ⁻¹	Score
0.75 < 1.00	1.00	>650	1.00
0.75 < 1.00	1.05	570 < 650	1.05
0.65 < 0.75	1.15	490 < 570	1.15
0.50 < 0.65	1.25	440 < 490	1.25
0.35 < 0.50	1.35	390 < 440	1.35
0.20 < 0.35	1.45	345 < 390	1.50
0.10 < 0.20	1.55	310 < 345	1.65
0.03 < 0.10	1.75	280 < 310	1.80
< 0.03	2.00	<280	2.00

Aridity Index and Precipitaion index scores

4 . Once the model has been executed successfully, The ouputs will be loaded onto Qgis. Right click on the temporary layer and navigate to the Save as option to to export the layers with the desired Name, CRS and dimensions as shown below;

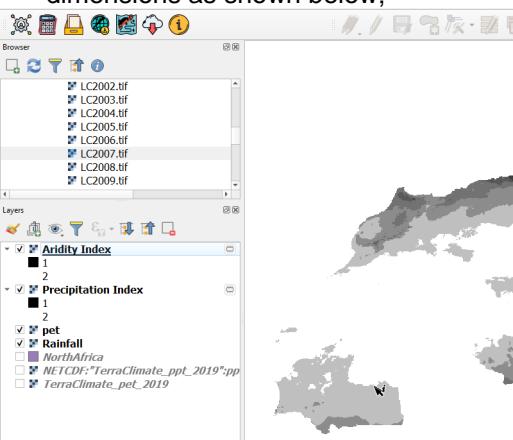

CQI Model graphical model outputs

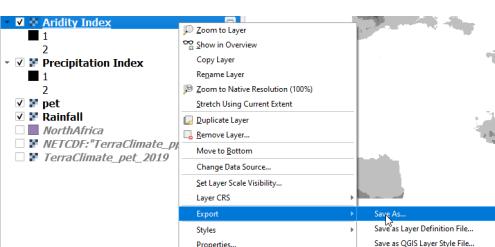


Saving the outputs

Vegetation Quality Index

Note

On the horizontal and vertical resolution settings in the Save as dialog paset the value 0.0027778 for each of the outputs to give the layers a resolution of 300m to match other variables for computing the desertification indicators

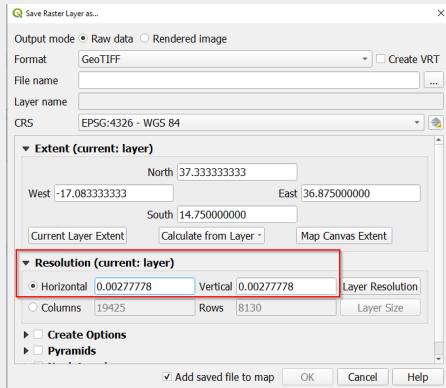

Setting the resolution of the output layers layers

Uploading the Aridity Index to MISLAND Service

Note

It is important that you give the Aridity Index layer a descriptive name and associate it with the correct year and raster category as shown below.

Add raster

Name: Aridity Index 2019

Description:

Raster year: 2019

Raster category: Aridity Index

Rasterfile: Choose File Aridity Index.tif

Raster source: LULC

Admin zero:

Aridity index data upload

Uploading the Rainfall Data to MISLAND Service

Vegetation Quality Index

Vegetation plays a key role in preventing desertification by providing shelter against wind and water erosion. Plant cover promotes infiltration of water and reduces runoff, residual plant materials from senescent vegetation enriches the soil with organic matter which improves its structure and cohesion . The preliminary classification and the assigned scores of the vegetation characteristics is as summarized in the table below:

Sensor/Dataset	Temporal	Spatial	Extent	License
ESA CCI Land Cover	1992-2018	300 m	Global	CC by-SA 3.0
PROBAV NDVI	2013-present	100 m	Global	Public Domain

Compute and download PROBAV maxNDVI from Google Earth Engine

To compute and download PROBAV maximum NDVI composite from google earth engine. Open the [Google Earth Engine Code](#) and paste the lines of code provided below


```

1 //Import the Proba-V data and North Africa region geometry
2
3 var imageCollection = ee.ImageCollection("VITO/PROBAV/C1/S1_TOC_100M"),
4 table2 = ee.FeatureCollection("users/brianchellotti/MislandAfrica");
5
6 //filter the image collection by year, compute the maximum NDVI, and clip to the study area
7 var filteredCollection = imageCollection.filterDate('2018-01-01', '2019-01-01')
8                                         .max()
9                                         .clip(table2);
10
11 var ndviImage = filteredCollection.select('NDVI');
12
13 Map.addLayer(ndviImage.randomVisualizer());
14
15 //Export the data to drive
16 Export.image.toDrive({
17   image: ndviImage,
18   description: 'NDVI_Max_2018',
19   maxPixels: 1e13,
20   scale: 100,
21   region: table2
22 })

```


Data Preprocessing in Qgis

1. Open the clipped landcover data(all 36 classes) and the ProbaV maximum NDVI composite data on Qgis

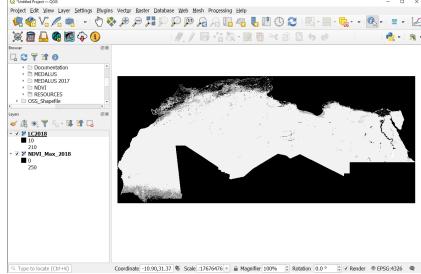


Landcover data and NDVI data loaded to Qgis

2. Once the layers are loaded on to Qgis, open the processing toolbox and search for 'Vegetation Quality Index' in the search bar. The vegetation quality index model should show up under the **Models** section as shown. Click on the Model to open it.



Vegetation Quality Index processing Model

3. On the Vegetation Quality Index dialog that pops up, select the loaded landcover and NDVI data as inputs and run the model

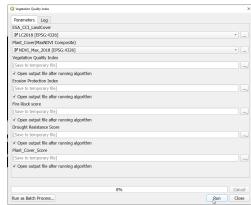


Vegetation Quality Index

Vegetation Qulity Index inputs

Note

The vegetation Quality Index model Reclassifies the landcover and assigns scores to the landcover groups for the Fire Risk, Erosion Protection and the Drought resistance. The plant cover is derived from the Maximum NDVI composite as summarized in the graphical model below.

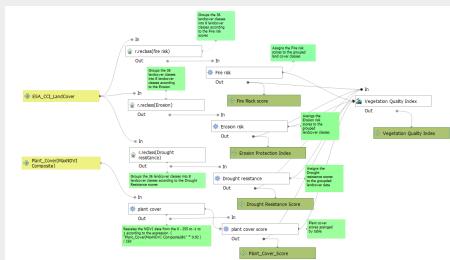

Vegetation Qulity Index inputs

The scores to the reclassified landcover outputs and plant cover scores are assigned according to the table below: *Ferrara, Agostino, et al. "Updating the MEDALUS■ESA Framework for Worldwide Land Degradation and Desertification Assessment." Land Degradation & Development 31.12 (2020): 1593-1607.*


Code	Type (from the source)	Drought resistance Scores	Fire risk Scores	Erosion protection Scores
10	Cropland, Rainfed	1.5	1.4	1.7
11	Horticultural cover	1.0	1.0	1.0
12	Tree or shrub cover	1.3	1.2	1.6
20	Cropland, irrigated, post flooding	1.4	1.4	1.4
30	Mosaic tree and shrub (<50%) / natural vegetation (<50%)	1.5	1.5	1.5
40	Mosaic natural vegetation (>50%) / cropland (<50%)	1.5	1.4	1.4
50	Tree cover, broadleaved, evergreen, closed to open (>15%)	1.0	1.3	1.0
60	Tree cover, broadleaved, deciduous, closed to open (>15%)	1.1	1.4	1.1
61	Tree cover, broadleaved, deciduous, open (>15%)	1.0	1.3	1.0
62	Tree cover, broadleaved, deciduous, open (15-40%)	1.2	1.7	1.4
70	Tree cover, needleleaved, evergreen, closed to open (>15%)	1.1	1.5	1.1
71	Tree cover, needleleaved, evergreen, open (15-40%)	1.1	1.5	1.0
72	Tree cover, needleleaved, evergreen, open (15-40%)	1.2	1.2	1.3
80	Tree cover, needleleaved, deciduous, closed to open (>15%)	1.2	1.3	1.3
81	Tree cover, needleleaved, deciduous, open (>15%)	1.3	1.3	1.5
82	Tree cover, needleleaved, deciduous, open (15-40%)	1.3	1.3	1.5
90	Tree cover, mixed leaf type (broadleaved and needleleaved)	1.0	1.1	1.0
100	Mosaic tree and shrub (>50%) / herbaceous cover (<50%)	1.4	1.5	1.2
110	Mosaic tree and shrub (>50%) / herbaceous cover (<50%)	1.3	1.4	1.3
120	Shrubland	1.5	1.4	1.6
121	Shrubland evergreen	1.2	1.6	1.2
122	Shrubland deciduous	1.4	1.4	1.6
130	Grassland	1.6	1.3	1.4
140	Lichens and mosses	1.0	1.0	1.1
150	Scrub, trees, shrub, herbaceous cover (<15%)	1.8	1.5	1.7
151	Sparse tree (<15%)	1.5	1.2	1.6
152	Sparse shrub (<15%)	1.5	1.2	1.6
153	Herbaceous cover (<15%)	1.8	1.5	1.7
160	Tree cover, flooded, fresh or brackish water	1.0	1.0	1.0
170	Tree cover, flooded, saline water	1.0	1.1	1.2
180	Shrub or herbaceous cover, flooded, fresh/saline/brackish water	1.1	1.1	1.2
200	Unconsolidated bare areas	2.0	2.0	2.0
201	Consolidated bare areas	2.0	1.0	2.0
202	Unconsolidated bare areas	2.0	1.0	2.0
190, 210, 220, 230,	Urban, Water, Permanent snow and ice and No data			Excluded

Vegetation Qulity Index inputs

Plant cover, NDVI _{Max}	Score
0.80 < 0.80	1.0
0.72 < 0.72	1.1
0.50 < 0.62	1.2
0.38 < 0.50	1.4
0.26 < 0.38	1.5
0.14 < 0.26	1.6
0.11 < 0.14	1.7
0.11 < 0.13	1.8
0.11 < 0.11	1.9
< 0.11	2.0

Plant cover scores


4 . On running the model the ouputs for the elementary VQI variables should be loaded onto QGIS as temporary layers. Save the layers to your desired folder with the appropriate descriptive name.

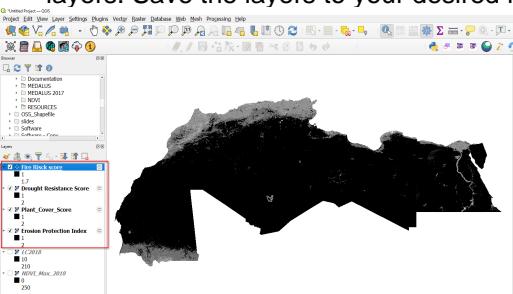

Vegetation Qulity Index model outputs

Note

To save the layers with the appropriate dimensions, right click on the layer you want to save and navigate to *Export > Save as* and on the *Save as* dialog set the appropriate name and location for the output. Make sure to set the horizontal and vertical resolution option to 0.00277778 for all the outputs as shown below.

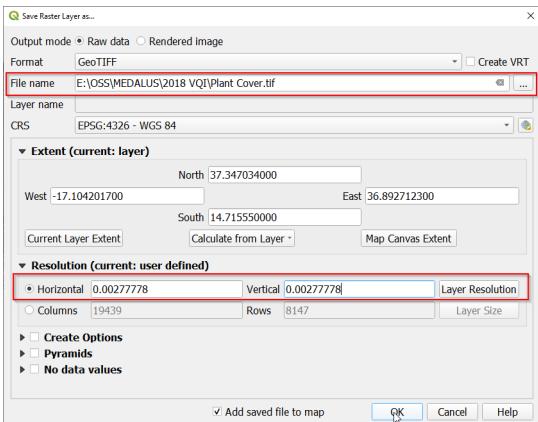


Vegetation Quality Index model outputs

Data Upload to MISLAND service

Management Quality Index


Data Preprocessing in Qgis

1. Open the downloaded country population density data on Qgis as shown in the figure so as to merge them

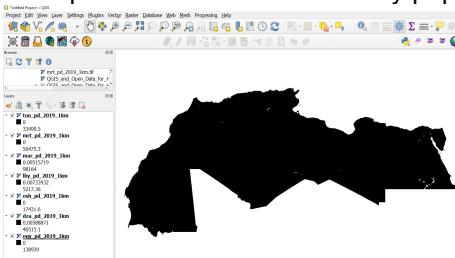

Opening Land cover and population data on Qgis

2. On the Qgis Menu-bar, navigate to *Raster>Miscellaneous>Merge* as shown below:

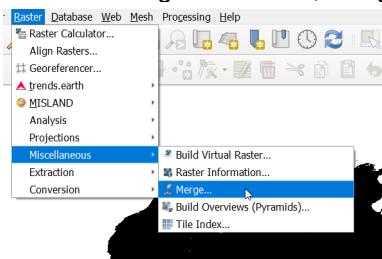


Merging Population Dataset

3. On the dialog that pops-up, click on the *Input Layer* selection option and choose *Select All*




Management Quality Index

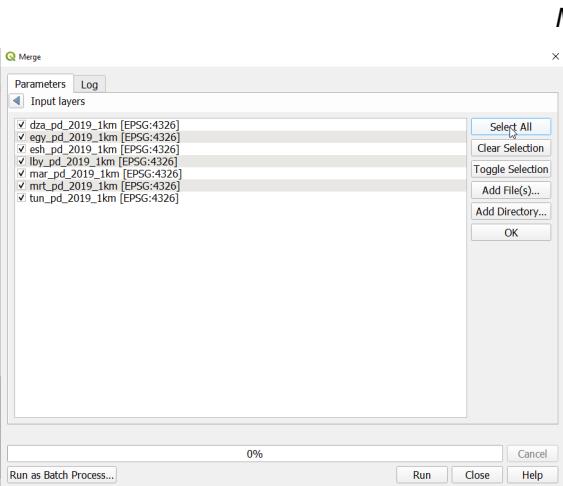

Selecting population datasets to merge


Save the merged layer to your desired location.

- With the output from step 3 above loaded onto Qgis, Load the landcover data for the same year as the population data

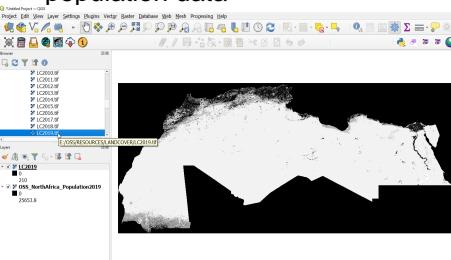


Load the Landcover data on Qgis

- Once the layers are loaded on to Qgis, open the processing toolbox and search for 'Management Quality Index' in the search bar. The management quality index model shoul show up under your the **Models** section as shown. Click on the Model to open it.

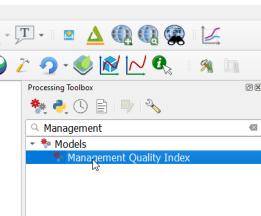

Accessing the MQI model from the processing toolbox

- Select the Landcover and Population dataset as your model inputs on the dialog that pops up as shown below:

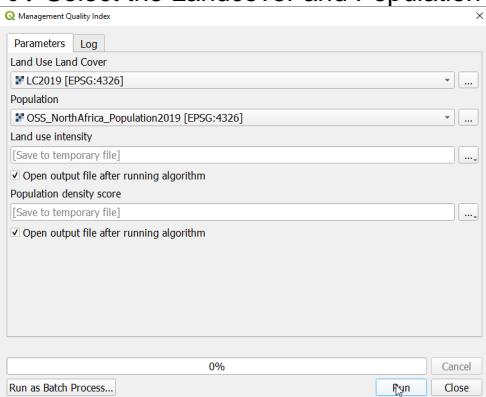


Selecting Input parameters for the MQI model

Note

According to the major land use types for assessing the management quality degree of human induced stress, the land use intensity is obtained by defining the type of land use in a certain piece of land using the land cover. The population density was used as a proxy of human pressure on the environment: Ferrara, A*.., Kosmas, C., Salvati, L., Padula, A., Mancino, G., & Nolè, A. (2020). Updating the MEDALUS■ESA Framework for Worldwide Land Degradation and Desertification Assessment. *Land Degradation & Development*, 31(12), 1593-1607.

The simplified methodology is as represented in the workflow below:

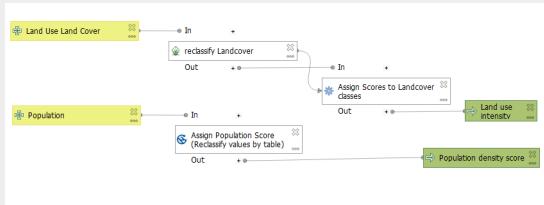

Management Quality Index Model summary


Type (from the source)	Land Use Intensity
10 Cropland, Rainfed	1.7
11 Cropland, Irrigated	1.7
12 Tree or shrub cover	1.4
20 Cropland, irrigated or not (fallow)	1.6
30 Mosaic of cropland/natural vegetation (<50%)	1.5
40 Mosaic: natural vegetation (>50%)/cropland (<50%)	1.5
50 Tree cover, broadleaved, evergreen, closed to open (>15%)	1.1
60 Tree cover, broadleaved, deciduous, closed to open (>15%)	1.2
61 Tree cover, broadleaved, deciduous, closed (>40%)	1.0
62 Tree cover, broadleaved, evergreen, closed (>40%)	1.3
70 Tree cover, needleleaved, evergreen, closed to open (>15%)	1.1
71 Tree cover, needleleaved, evergreen, closed (>40%)	1.2
72 Tree cover, needleleaved, deciduous, closed to open (>15%)	1.2
80 Tree cover, needleleaved, deciduous, closed to open (>15%)	1.1
81 Tree cover, needleleaved, deciduous, open (15-40%)	1.5
82 Tree cover, mixed leaf type (broadleaved and needleleaved)	1.0
100 Mosaic: tree, shrub, herbaceous cover (>50%)	1.2
110 Mosaic herbaceous cover (>50%)/tree and shrub (<50%)	1.5
120 Shrubland	1.7
121 Shrubland evergreen	1.5
122 Shrubland deciduous	1.6
130 Lichens and mosses	1.5
140 Lichens and mosses	1.5
150 Sparse vegetation (tree, shrub, herbaceous cover) (<15%)	1.6
151 Sparse vegetation (<15%)	1.6
152 Sparse shrub (<15%)	1.6
153 Sparse tree and shrub (<15%)	1.7
160 Tree cover, flooded, fresh or brackish water	1.3
170 Tree cover, flooded, saline water	1.2
180 Shrubland, tree, flooded, fresh/saline/brackish water	1.3
200 Bare areas	2.0
201 Uncultivated bare areas	2.0
202 Uncultivated bare areas	2.0
190-210, 220: Urban, Water, Permanent snow and ice and No data	Excluded

Land use intensity score


Population density, inhabitants km ⁻²	Ranges	Score
< 4	1.0	
4 < 30	1.1	
30 < 80	1.2	
80 < 170	1.1	
170 < 300	1.4	
300 < 500	1.5	
500 < 850	1.6	
850 < 1400	1.7	
1400 < 2000	1.8	
2000 < 2700	1.9	
≥ 2700	2.0	

Population density score

6 . Once the model is executed successfully the outputs will be loaded as temporary layers. You can save the layers with the desired name and set the horizontal and vertical resolution option to 0.0027778

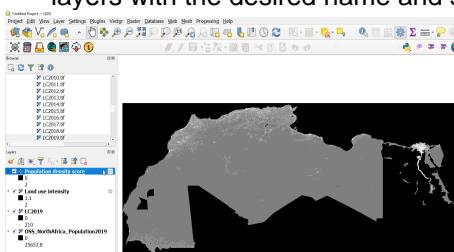

Management Quality Index model outputs

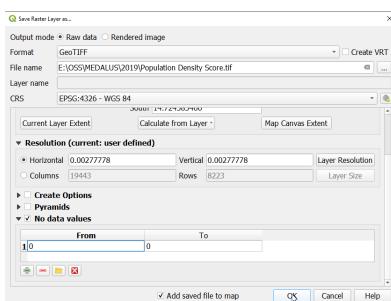

Uploading the data to MISLAND Service

Coastal Vulnerability Index

The index integrates six physical variables in a quantifiable way to reflect the coast's relative vulnerability to physical changes caused by sea-level rise. This method produces numerical data that cannot be immediately correlated to specific physical effects. However, it does emphasize the areas where the various effects of sea-level rise may be the most severe.

VARIABLE	Ranking of coastal vulnerability index				
	Very low	Low	Moderate	High	Very high
Geomorphology	Rocky, cliffed coasts Fjords Fiords	Medium cliffs Indented coasts	Low cliffs Glacial drift	Cobble beaches Estuary Lagoon	Bare beaches Sand beaches Salt marsh Mud flats Deltas Mangrove Coral reefs
Coastal Slope (%)	> 1.9	1.3 – 1.9	0.9 – 1.3	0.6 – 0.9	< .6
Relative sea-level change (mm/yr)	< -1.21	-1.21 – 0.1	0.1 – 1.24	1.24 – 1.36	> 1.36
Shoreline erosion/accretion (m/yr)	>2.0 Accretion	1.0 – 2.0	-1.0 – +1.0 Stable	-1.1 – -2.0 Erosion	< -2.0
Mean tide range (m)	> 6.0	4.1 – 6.0	2.0 – 4.0	1.0 – 1.9	< 1.0
Mean wave height (m)	<1.1	1.1 – 2.0	2.0 – 2.25	2.25 – 2.60	>2.60

Ranking of the coastal vulnerability index variables

Once each section of coastline is assigned a risk value for each specific data variable, the coastal vulnerability index is calculated as the square root of the geometric mean of these values divided by the total number of variables.

Data Download


The data was downloaded from different platforms which included the Google Earth Engine platform, Global lithological dataset and the Ecological coastal units site based on the variable in question.

Data Processing Steps

Geomorphology


The Geomorphological dataset was downloaded from the global lithological portal given below; [Global lithological dataset](#).

It was then subset to the generated study area map of the North Africa region. On the layer styling panel, symbolize the data into 5 classes using the discrete interpolation and then use the interpolation output to classify the data into five classes to give them the degree of erosivity using the qgis reclassify by table tool as shown the figure below;

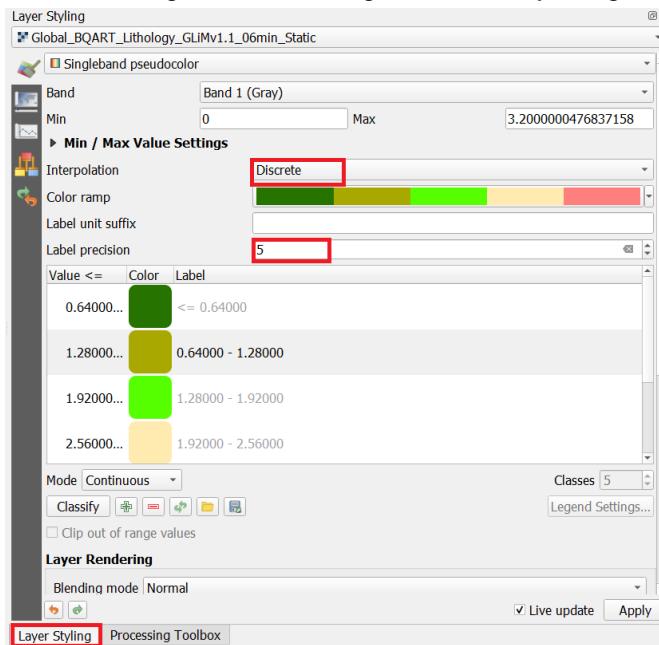


Coastal Vulnerability Index

Layer Styling

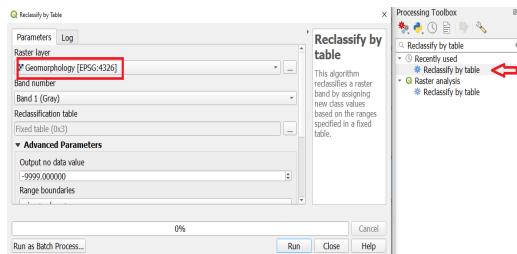

Geomophology reclassify by table

The result of the re-classification should be 5 classes with a risk value of 5 classes whereby value 1 is very low and value 5 is very high.

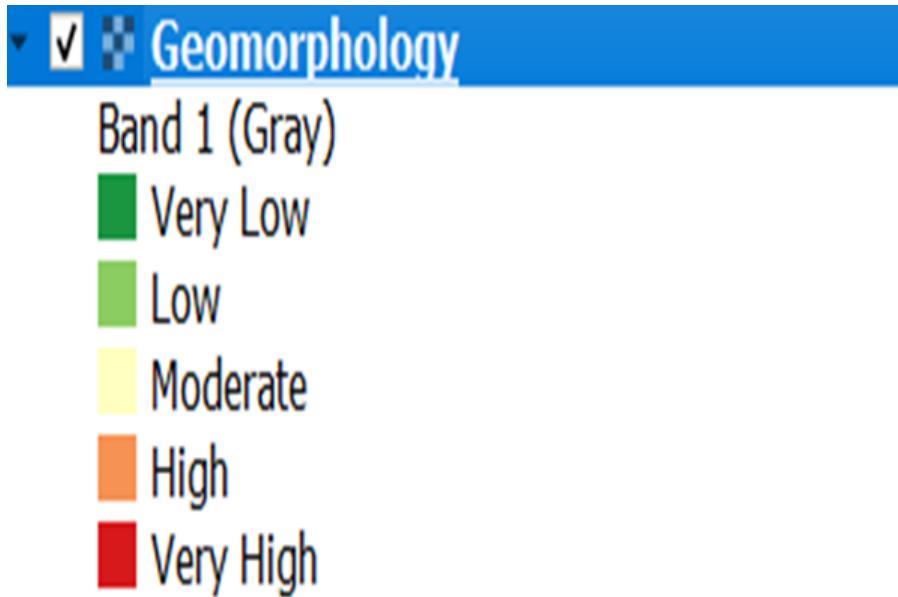

Geomophology Erosivity Classes

Upload to MISLAND Service

A screenshot of a web-based form for uploading a raster to the MISLAND service. The form includes fields for 'Name' (set to 'Geomorphology'), 'Description' (empty), 'Raster year' (set to '2020'), 'Raster type' (dropdown set to '—'), 'Raster category' (dropdown set to 'Geomorphology'), 'Rasterfile' (dropdown set to 'C:\Users\dp\Geomorphology.tif'), 'Raster source' (dropdown set to 'Modis'), 'Admin zone' (dropdown set to '—'), and 'Resolution' (empty input field).

Uploading the data to MISLAND service


Coastal Slope

Download the elevation raster file from [Google Earth Engine](#) Subset to the North Africa coastal region using the region's shapefile. To compute slope, **Open Qgis > Raster > Analysis > Slope**. The slope computation window opens as shown below:



Slope Computation

After a successful slope computation, symbolize it using the discrete interpolation method in Qgis software and then reclassify it into five classes using the Qgis reclassify by table tool.

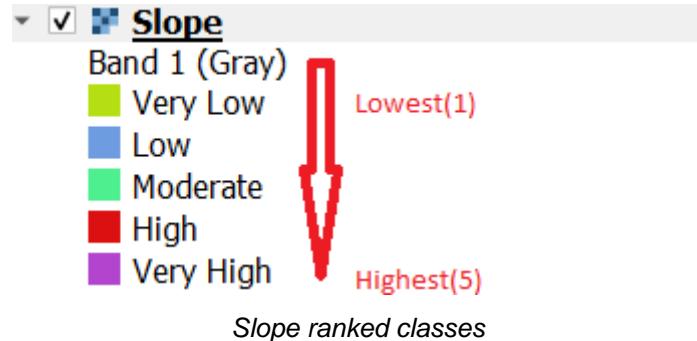

Note

The class ranges should be obtained from the layer styling value label whereby the lowest is assigned value 1 whereas the highest is assigned value 5.

Uploading the data to MISLAND service

Tidal Range

Download the data from the [Coastal Ecological Units \(ECU\)](#). The data comes as a shapefile with different data attributes of 10 variables. First convert the data into a raster using the **Rasterize GDAL tool in Qgis**. Remember to change the **burn-in field value** to **TIDAL RANGE**. Leave the other options as default and click run.

Tidal Range Raster Conversion

Next is to reclassify the data and assign the class ranges as it was done in the Geomorphology data preparation.

Coastal Vulnerability Index

Uploading the data to MISLAND service

Wave Height

Download the data from [global wave statistics](#), and subset it to the North Africa coast region. Follow the same procedure as the one used in the Geomorphology data preparation. to classify the data and rank into into 5 categorical classes.

Change raster

Name:

Description:

Raster year:

Raster type:

Raster category:

Rasterfile: Change No file chosen

Raster source:

Admin zone: /

Resolution:

Uploading the data to MISLAND service

Shoreline Erosion

Download the data from the [Coastal Ecological Units \(ECU\)](#) and then follow the procedure as the one given in Tidal Range data preparation.

Change raster

Name:

Description:

Raster year:

Raster type:

Raster category:

Rasterfile: Change No file chosen

Raster source:

Admin zone: /

Resolution:

Uploading the data to MISLAND service

Sea Level Rise

Change raster

Name:

Description:

Raster year:

Raster type:

Raster category:

Rasterfile: Change No file chosen

Raster source:

Admin zone: /

Resolution:

Uploading the data to MISLAND service

Indices and tables

- [genindex](#)
- [modindex](#)
- [search](#)