

## Hands on Day - 2

### Student Course Portal - Angular FSE Hands-on

#### Project Description

Student Course Portal is an Angular based web application developed as part of FSE hands-on practice.

The application allows users to view students, add new students and delete existing student records.

The project demonstrates Angular concepts such as components, routing, services, dependency injection, data binding and directives.

---

#### Project Structure

```
src/app
├── components
│   ├── student-list
│   └── add-student
├── models
│   └── student.ts
├── services
│   └── student.service.ts
├── app.routes.ts
└── app.ts
```

---

#### Features Implemented

##### 1. Student List

Displays all available student details.

Displayed fields:

- Student ID
  - Student Name
  - Email
  - Course
  - Duration
-

## 2. Add Student

Users can add new student details through a form.

Implemented using:

- Template driven form
  - Two-way data binding using [(ngModel)]
- 

## 3. Delete Student

Users can remove student records.

Implemented using:

- Event binding
  - Service method
- 

## Angular Concepts Covered

### Components

Components are used to create reusable UI sections.

Created components:

- StudentListComponent
  - AddStudentComponent
- 

### Data Binding

Angular data binding connects TypeScript logic with HTML template.

Types used:

### Interpolation

{{student.name}}

### Property Binding

[value]="name"

### Event Binding

(click)="method()"

### Two Way Binding

[(ngModel)]="student.name"

---

## Services

StudentService is used to manage student data.

Responsibilities:

- Store student information
- Share data between components
- Handle CRUD operations

Methods:

getStudents()

addStudent()

deleteStudent()

---

## Dependency Injection

Angular automatically provides service objects using dependency injection.

Example:

```
constructor(  
  private service: StudentService  
)
```

---

## Routing

Angular routing is used for navigation between pages.

Routes:

### Route Component

/ Student List

/add Add Student

---

## Router Outlet

router-outlet acts as a placeholder where Angular displays routed components.

Example:

```
<router-outlet></router-outlet>
```

Directives Used



ngFor

Used to display list data.

Example:

```
<tr *ngFor="let student of students">
```

Code:

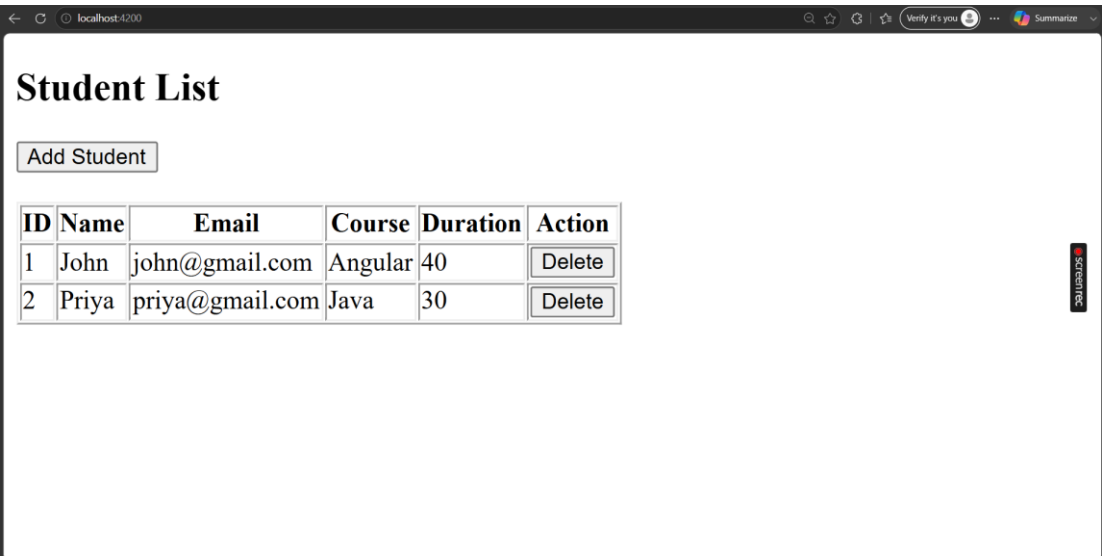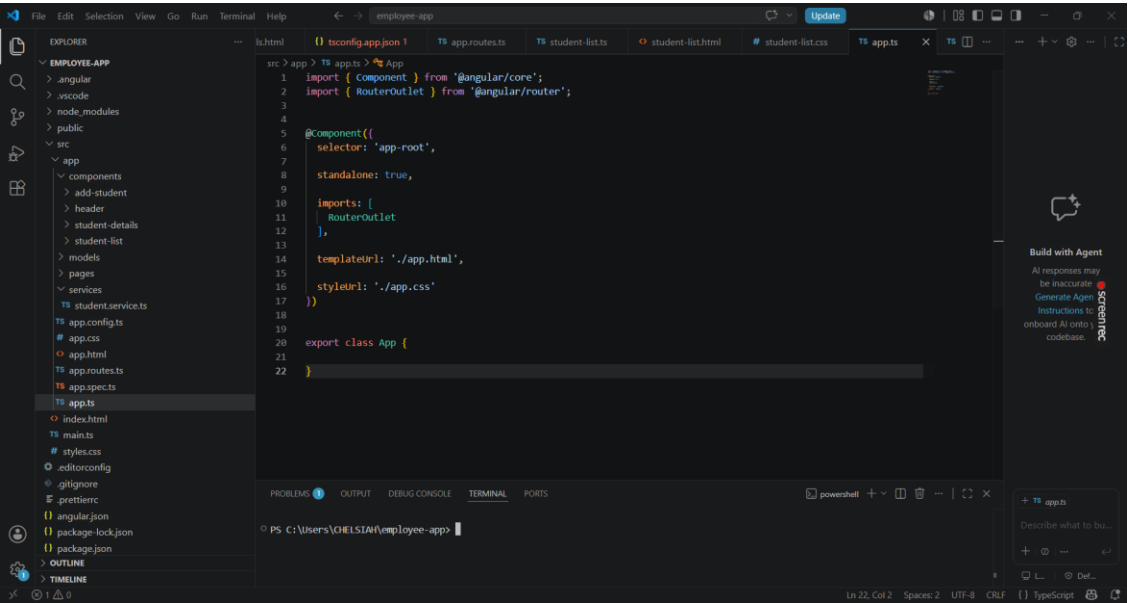

localhost:4200/add

Verify it's you

Chat

## Add Student

Name:

Email:

Course:  br> Duration:

Add

Screen Recorder

31°C Mostly clear

Search

ENG IN

21:05 24-06-2026

localhost:4200

Verify it's you

Chat

## Student List

Add Student

| ID | Name  | Email           | Course  | Duration | Action |
|----|-------|-----------------|---------|----------|--------|
| 1  | John  | john@gmail.com  | Angular | 40       | Delete |
| 2  | Priya | priya@gmail.com | Java    | 30       | Delete |
| 3  | Neha  | neh45@gmail.com | Java    | 40       | Delete |

Screen Recorder

31°C Mostly clear

Search

ENG IN

21:05 24-06-2026

After Deleting a Student Data:-

localhost:4200

## Student List

Add Student

| ID | Name  | Email           | Course | Duration | Action |
|----|-------|-----------------|--------|----------|--------|
| 2  | Priya | priya@gmail.com | Java   | 30       | Delete |
| 3  | Neha  | neh45@gmail.com | Java   | 40       | Delete |

Deleted

30°C Mostly clear Search ENG IN 21:05 24-06-2026