

Basic Python Functions

First Tutorial for 3CP3 class



Tutorials will be held every Tuesday

- I strongly suggest that you show up to the tutorials if you have ANY questions.
- I can't read minds ... YET
- Suggestions
- REMEMBER:
- You can also
- Questions ?



s welcome

ca

Python Indentation and basic syntax

- Python uses whitespace and indentation to construct the code structure

A comment that is not executed

Whitespace to define the block of coding

```
numbers = [0,1,2,3,4,5,6,7,8,9,10]
#A function to calculate the mean of a given list of numbers
def mean(list):
    sum = 0
    for i in list:
        sum += i
    return sum / len(list)

print(mean(numbers))
```

- More readable and uniform
- Python is case sensitive, so it encourages precision and clarity while coding.

Basic operations

- You can compute basic operations directly.

Type on your jupyter notebook
(Google Colab)



```
10 + 2
```

```
12
```

Get the answer

- But working with multiple variable is useful to assign each variable a name.

```
a = 10  
b = 2  
c = a + b
```

- And then you can print the variable that you stored the operation.

```
print(c)
```

- You can print multiple variables, strings, arrays...

List and operations with lists

- You can create lists and populate them with numbers and strings.

```
empty_list = []  
mixed_list = [1,2,'Hello world',False]  
float_list = [1.2,2.3,4.5,2.0,4.5]
```

- Lists are:
 1. Ordered
 2. Mutable
 3. Denoted by square brackets

- You can check the length of a list

```
print(len(empty_list))  
print(len(mixed_list))
```

- You can add more variables to your list by using the *append* command

```
empty_list = []  
empty_list.append(3)  
print(empty_list)
```

- Given a list $L = [1, 2, 3, 4, 5, 6, 7, 8, 9]$. We can access a specific position of the list using slicing.

- The whole list: $L[:]$
- Everything after (and including) index position i : $L[i:]$
- Everything before index position i : $L[:i]$
- Everything before the position j steps from the end: $L[:-j]$
- Everything after (and including) the position j steps from the end: $L[-j:]$

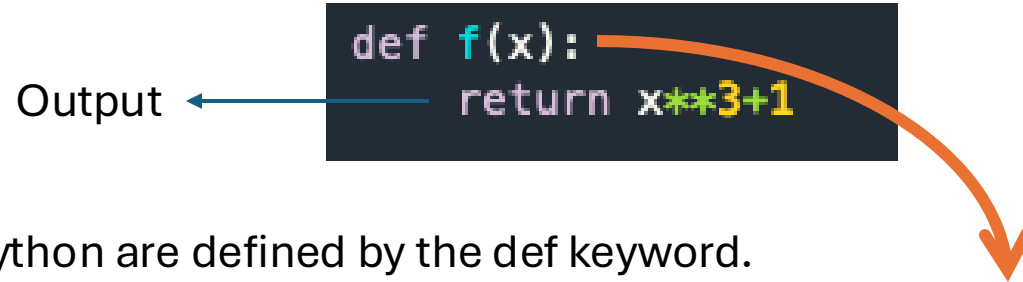
- $L[0] = [1]$
- $L[2:] = [3, 4, 5, 6, 7, 8, 9]$
- $L[:4] = [1, 2, 3, 4]$
- $L[-2:] = [8, 9]$
- $L[:-6] = [1, 2, 3]$

- Note



Functions

- A function in Python works the same as a function in math: you define an input and an output.

Output ← 

```
def f(x):  
    return x**3+1
```

The diagram shows a code block with the function definition. A blue arrow points from the text 'Output' to the return statement. An orange arrow starts from the function name 'f' and points down towards the function call 'f(2)' in the next block.

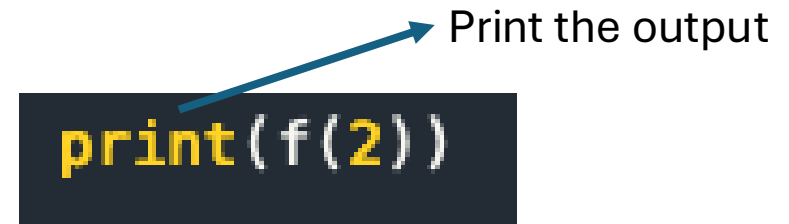
- Functions in Python are defined by the def keyword.
 - And you put the list of outputs inside a parenthesis followed by :
- This defines the function $f(x) = x^3 + 1$ and to evaluate the function in each input you do,

Call the
function
by its
name

 `f(2)`

The diagram shows the function call 'f(2)'. A green arrow points from the text 'Call the function by its name' to the 'f'. A yellow arrow points from the '2' to the text 'Put the input inside the parenthesis...'.

Put the input inside the
parenthesis. This is the value that
you want to evaluate.

Print the output
 `print(f(2))`

The diagram shows the print statement 'print(f(2))'. A blue arrow points from the text 'Print the output' to the 'print' keyword.

Conditional Statements

- There are instances where we want to only execute a particular block of code if a certain condition is true.

```
if condition:  
    #code to execute if condition is true
```

- For multiple conditions, the syntax is,

```
if condition:  
    # code to execute if condition is true  
elif condition:  
    # code to execute if above condition is false and this condition is true  
else:  
    # code to execute if all previous conditions are false
```

- Comparison operations,
 - Equals $x == y$
 - Not Equal $x != y$
 - Less Than (strictly) $x < y$
 - Greater Than (strictly) $x > y$
 - Less Than or Equal to $x \leq y$
 - Greater Than or Equal to $x \geq y$

Loop

- When programming, there are times when you need to repeatedly perform a specific operation/action while updating certain parameters. In these situations, we use loops,

```
for item in sequence:  
    #code to be executed
```

Exercise

- Test the convergence of the alternating series,

$$\sum_{n=1}^{\infty} \frac{(-1)^{n+1}}{n}$$