

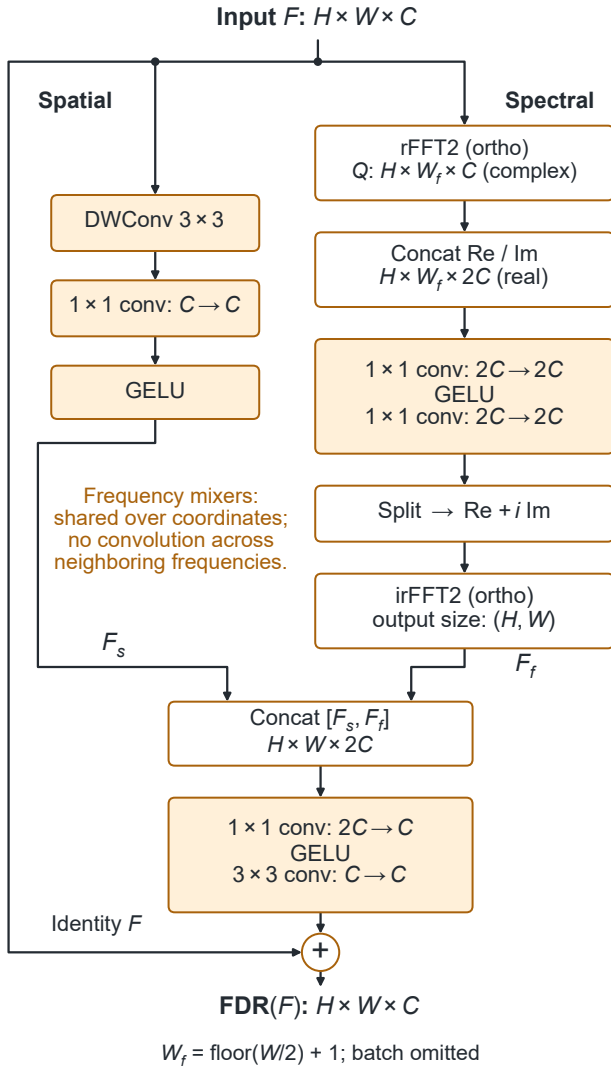


Fig. 2. Full-spectrum Fourier residual refinement (FDR). A depthwise-pointwise spatial branch complements a spectral branch. The one-sided rFFT representation retains all nonredundant frequencies. Shared real-valued 1×1 convolutions mix channels and real-imaginary components independently at each frequency coordinate, without convolution across neighboring frequencies. After inverse rFFT, spatial and spectral features are concatenated, projected, and added to the input.

Single-column placement

Final figure size: 88.568 x 145.344 mm.

Insert with width=columnwidth and preserve its natural aspect ratio.

Location in the manuscript

Replace the current Fig. 2 placeholder (fig:fdr), after the Full-Spectrum Fourier Residual Refinement subsection and before Guidance Modulation and Intensity Compensation.

What the diagram explains

Two feature branches, one-sided Fourier storage, real-imaginary channel mixing, inverse FFT, spatial fusion, and the identity residual.

Orange retains the FDR color from Fig. 1. Shaded boxes contain convolutional processing; white boxes show transforms, reshaping, concatenation, or addition.

Verified deliverables

PDF: vectors with embedded fonts.

SVG: editable text and 10 grouped modules.

Model check: 155 passed checks across the six real model instances and one odd-width diagnostic.

Scope

This is a size proof, not a recompiled manuscript. The original 1.15-inch placeholder height is insufficient; final paper pagination must be checked after replacement.