

APPLICATION LAYER

Lets Connect

The Application Layer

our goals:

- conceptual, implementation aspects of network application protocols
 - ▣ transport-layer service models
 - ▣ client-server paradigm
 - ▣ peer-to-peer paradigm
- learn about protocols by examining popular application-level protocols
 - ▣ HTTP
 - ▣ FTP
 - ▣ DNS

Some Network Apps

- e-mail
- web
- text messaging
- remote login
- P2P file sharing
- multi-user network games
- streaming stored video (YouTube, Hulu, Netflix)
- voice over IP (e.g., Skype)
- real-time video conferencing
- social networking
- search
- ...
- ...


Creating a network app

write programs that:


- run on (different) *end systems*
- communicate over network
- e.g., web server software communicates with browser software

no need to write software for
network-core devices

- network-core devices do not run user applications
- applications on end systems allows for rapid app development, propagation

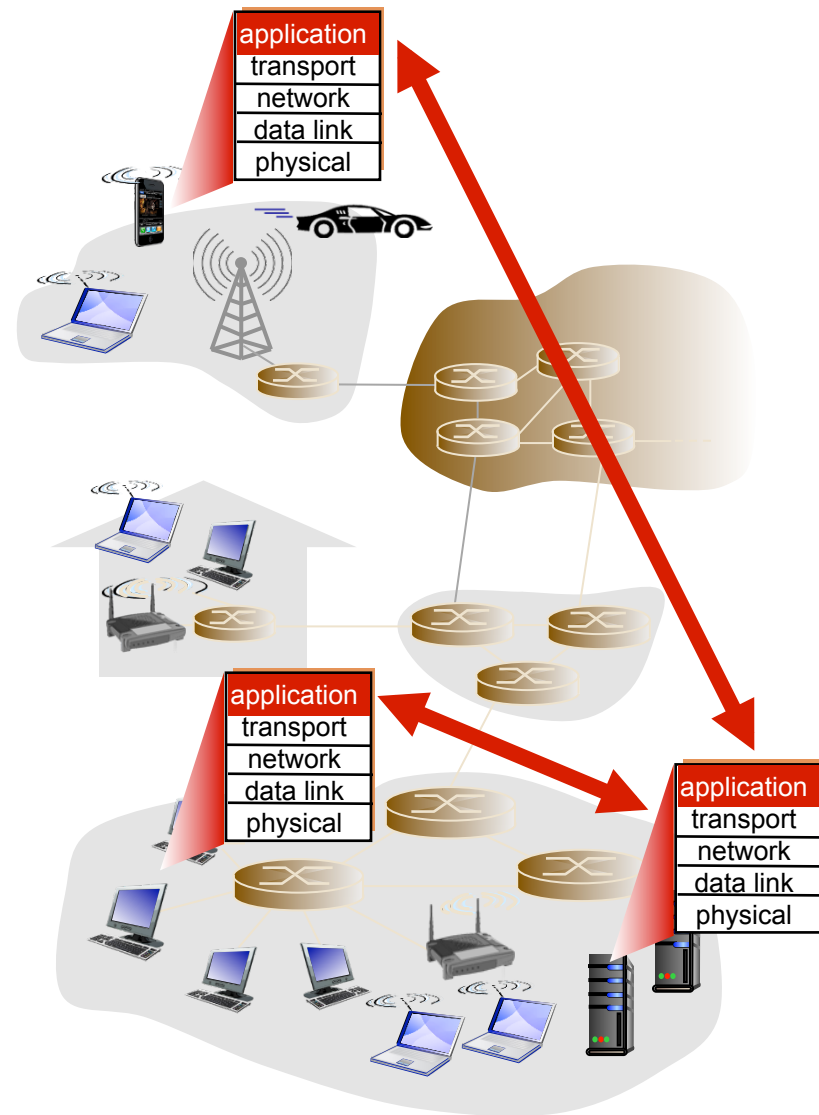

Network Architecture: Client-server

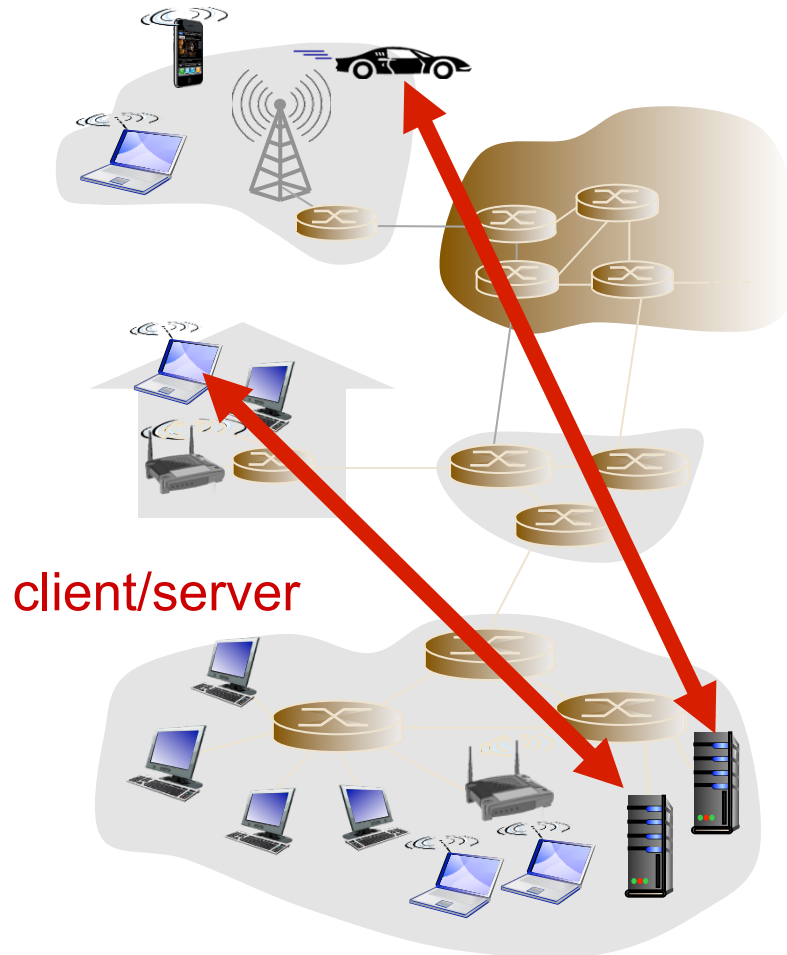

server:


- always-on host
- permanent IP address
- data centers for scaling

clients:

- communicate with server
- may be intermittently connected
- may have dynamic IP addresses
- do not communicate directly with each other

Network Architecture: Peer 2 Peer

- no always-on server
- arbitrary end systems directly communicate
- peers request service from other peers, provide service in return to other peers
 - ▣ *self scalability* – new peers bring new service capacity, as well as new service demands
- peers are intermittently connected and change IP addresses
 - ▣ complex management

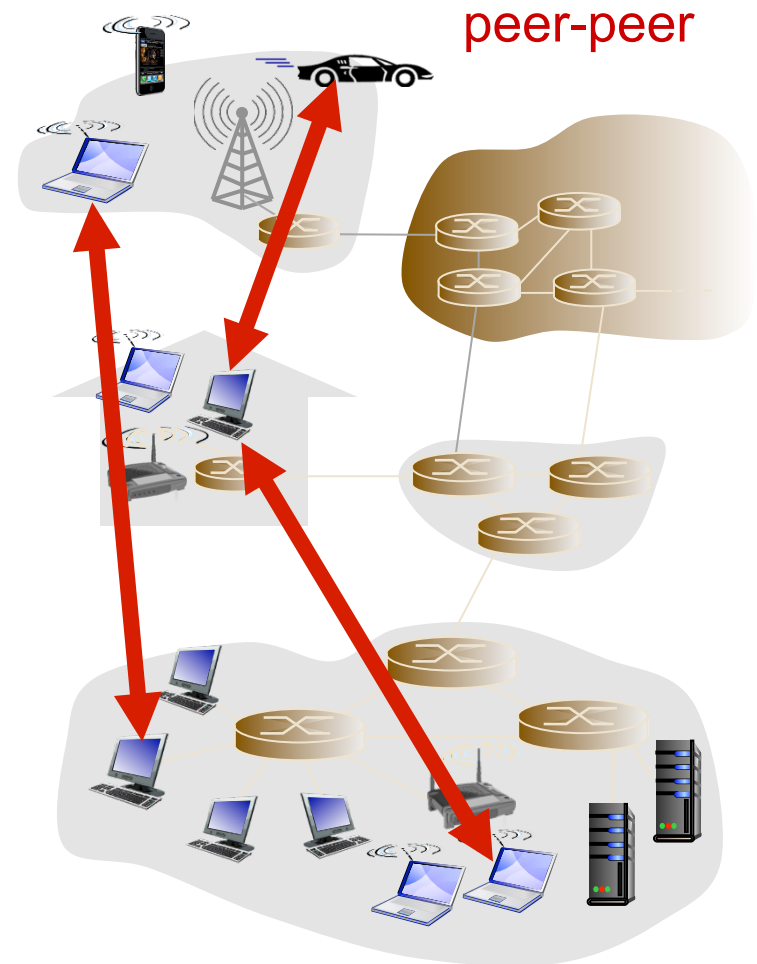

Process Communication

process: program running within a host

- within same host, two processes communicate using *inter-process communication* (defined by OS)
- processes in different hosts communicate by exchanging *messages*

clients, servers


client process: process that initiates communication

server process: process that waits to be contacted

- ❖ aside: applications with P2P architectures have client processes & server processes

Sockets

- process sends/receives messages to/from its **socket**
- socket analogous to door
 - ▣ sending process shoves message out door
 - ▣ sending process relies on transport infrastructure on other side of door to deliver message to socket at receiving process

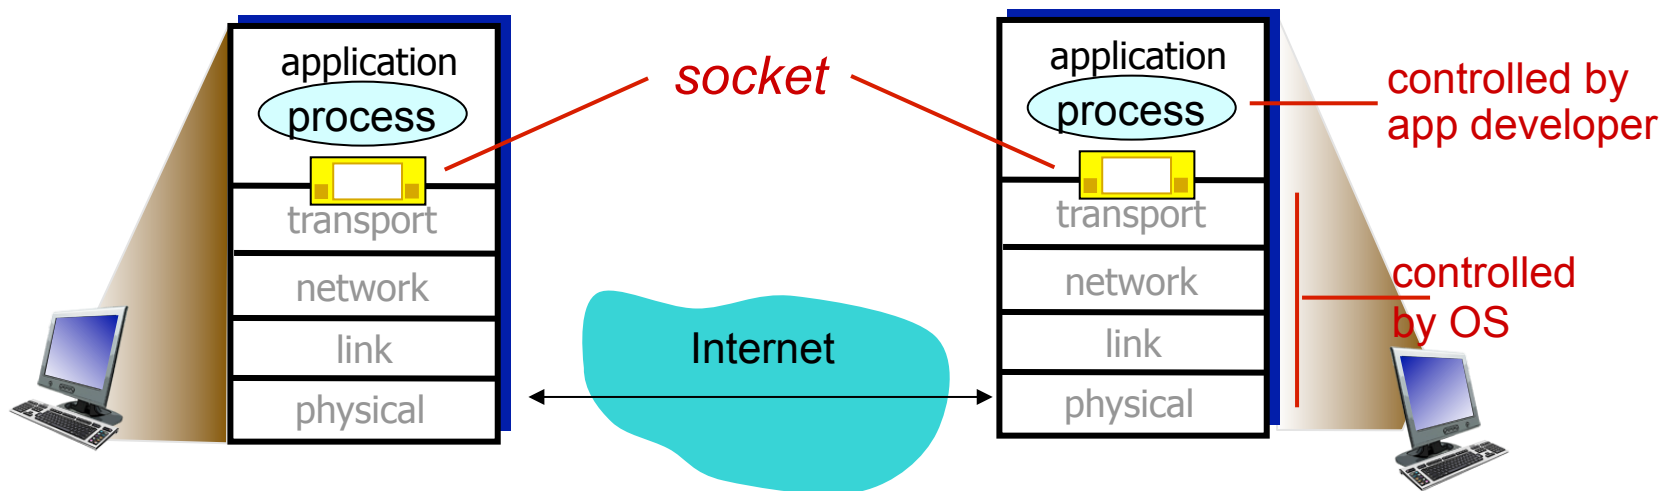

Addressing processes

- to receive messages, process must have *identifier*
- host device has unique 32-bit IP address
- Q: does IP address of host on which process runs suffice for identifying the process?
 - A: no, *many* processes can be running on same host
- *identifier* includes both **IP address** and **port numbers** associated with process on host.
- example port numbers:
 - ▣ HTTP server: 80
 - ▣ mail server: 25
- to send HTTP message to www.neu.edu.cn web server:
 - ▣ **IP address**: 202.118.1.7
 - ▣ **port number**: 80

App-layer protocol defines

- types of messages exchanged,
 - ▣ e.g., request, response
- message syntax:
 - ▣ what fields in messages & how fields are delineated
- message semantics
 - ▣ meaning of information in fields
- rules for when and how processes send & respond to messages

open protocols:

- defined in RFCs
- allows for interoperability
- e.g., HTTP, SMTP

proprietary protocols:

- e.g., Skype

What transport service does an app need?

data integrity

- some apps (e.g., file transfer, web transactions) require 100% reliable data transfer
- other apps (e.g., audio) can tolerate some loss

timing

- some apps (e.g., Internet telephony, interactive games) require low delay to be “effective”

throughput

- ❖ some apps (e.g., multimedia) require minimum amount of throughput to be “effective”
- ❖ other apps (“elastic apps”) make use of whatever throughput they get

security

- ❖ encryption, data integrity, ...

Transport service requirements: common apps

application	data loss	throughput	time sensitive
file transfer	no loss	elastic	no
e-mail	no loss	elastic	no
Web documents	no loss	elastic	no
real-time audio/video	loss-tolerant	audio: 5kbps-1Mbps video: 10kbps-5Mbps	yes, 100' s msec
stored audio/video	loss-tolerant	same as above	
interactive games	loss-tolerant	few kbps up	yes, few secs
text messaging	no loss	elastic	yes, 100' s msec yes and no

Internet transport protocols services

TCP service:

- *reliable transport* between sending and receiving process
- *flow control*: sender won't overwhelm receiver
- *congestion control*: throttle sender when network overloaded
- *does not provide*: timing, minimum throughput guarantee, security
- *connection-oriented*: setup required between client and server processes

UDP service:

- *unreliable data transfer* between sending and receiving process
- *does not provide*: reliability, flow control, congestion control, timing, throughput guarantee, security, or connection setup,

Q: why bother? Why is there a UDP?

Internet apps: application, transport protocols

application	application layer protocol	underlying transport protocol
e-mail	SMTP [RFC 2821]	TCP
remote terminal access	Telnet [RFC 854]	TCP
Web	HTTP [RFC 2616]	TCP
file transfer	FTP [RFC 959]	TCP
streaming multimedia	HTTP (e.g., YouTube), RTP [RFC 1889]	TCP or UDP
Internet telephony	SIP, RTP, proprietary (e.g., Skype)	TCP or UDP

Securing TCP

TCP & UDP

- ❖ no encryption
- ❖ cleartext passwds sent into socket traverse Internet in cleartext

SSL

- ❖ provides encrypted TCP connection
- ❖ data integrity
- ❖ end-point authentication

SSL is at app layer

- Apps use SSL libraries, which “talk” to TCP

SSL socket API

- ❖ cleartext passwds sent into socket traverse Internet encrypted