

# Radeon Voice Skill Foundry

Speak the SOP. Prove the Skill.

AMD AI DevMaster Hackathon - Track 2  
Chengyuan Ma | Solo participant | GitHub: Chengyuann

Private voice + source evidence + action trace -> governed skill + proof

|                                      |                                 |                                      |                                                    |
|--------------------------------------|---------------------------------|--------------------------------------|----------------------------------------------------|
| <b>257.65 tok/s</b><br>vLLM graph C8 | <b>12.47x</b><br>serving uplift | <b>85.35x</b><br>ASR batch real-time | <b>PASS / 7 / 68</b><br>voice gate / proof / tests |
|--------------------------------------|---------------------------------|--------------------------------------|----------------------------------------------------|

*The result is a source-bound Agent Skill package with explicit permissions, adversarial tests, hashed receipts, and versioned memory.*

Live product: <https://radeon-voice-skill-foundry.pages.dev/>

Product Demo: [https://github.com/Chengyuann/radeon-voice-skill-foundry/releases/download/submission/RADEON\\_VOICE\\_SKILL\\_FOUNDRY\\_DEMO.mp4](https://github.com/Chengyuann/radeon-voice-skill-foundry/releases/download/submission/RADEON_VOICE_SKILL_FOUNDRY_DEMO.mp4)

Demo captions: [https://github.com/Chengyuann/radeon-voice-skill-foundry/releases/download/submission/RADEON\\_VOICE\\_SKILL\\_FOUNDRY\\_DEMO.srt](https://github.com/Chengyuann/radeon-voice-skill-foundry/releases/download/submission/RADEON_VOICE_SKILL_FOUNDRY_DEMO.srt)

## Speak the SOP. Prove the Skill.

**AMD AI DevMaster Hackathon - Track 2 Participant:** Chengyuan Ma **Team:** None (solo) **GitHub:** Chengyuann  
**Repository:** <https://github.com/Chengyuann/radeon-voice-skill-foundry>

## 1. Executive Summary

Radeon Voice Skill Foundry is a private-Agent system whose core ASR and Agent models run on a dedicated Radeon Cloud instance. It turns a spoken standard operating procedure and an aligned action trace into a verified, reusable Agent Skill package.

Most workflow-learning systems infer procedures from repeated successful runs. That approach has a cold-start problem: the Agent must act before it has enough evidence to learn, and action traces alone do not explain exceptions, privacy boundaries, or prohibited behavior. Radeon Voice Skill Foundry captures those hidden rules directly from a domain expert's voice and proves them before the first risky run.

The resulting package contains:

- portable Agent Skill Markdown in SKILL.md
- typed constraints
- a least-privilege capability policy
- positive and adversarial test fixtures
- deterministic verification results
- hashed governance receipts
- a proof bundle with SHA-256 integrity fields
- versioned procedural memory
- source-bound voice quality evidence

Core speech and Agent inference run locally on an AMD Radeon GPU through ROCm. The public product is served by Cloudflare Pages and forwards same-origin API requests through an authenticated gateway to the W7900 runtime.

## 2. Application Scenario

The reference scenario is private project-review follow-up.

A domain expert reviews an internal meeting note and demonstrates a follow-up workflow while speaking rules that are not visible in the UI:

*Only include P0 and P1 findings. Never expose compensation data. Draft the follow-up email, but do not send it automatically. If the owner is missing, require confirmation. Create a calendar hold only when a due date exists.*

The Agent must:

1. transcribe the private SOP locally

2. align the spoken rationale with structured action events
3. retrieve relevant local policy and prior SOP evidence
4. compile enforceable constraints and a multi-step procedure
5. infer the minimum required permissions
6. generate positive and adversarial verification fixtures
7. block prohibited actions before tool execution
8. issue governance receipts and a proof bundle
9. store the verified skill for immediate exact reuse

Target users include operations teams, project managers, compliance-sensitive office teams, and domain experts who need control over where core inference and procedural memory run.

The public deployment uses Cloudflare Pages as the UI and authenticated transport layer. It includes a synthetic fixture so no real confidential material is needed when using the hosted application. The same application can be deployed without the public gateway on a private network.

### 3. Why Voice Is Structurally Necessary

Mouse and keyboard interactions show what happened. They do not reliably show:

- why a step was taken
- which condition enabled the step
- which exception changes the procedure
- which field is sensitive
- which external side effect is prohibited
- when human confirmation is mandatory

Voice captures this missing rationale during demonstration. The system treats speech as a policy and intent channel, not as a cosmetic alternative to typing.

This makes the product different from a meeting assistant or workflow recorder: it creates a governed Agent capability and proof, not a summary.

#### Voice Evidence Gate

Voice-derived policy is only useful when the source audio is trustworthy enough to preserve qualifiers, names, numbers, and negation. Before promotion, the system measures the browser-produced WAV locally and records:


- format, sample rate, channel count, and duration
- RMS and peak level
- clipping and near-silence ratios
- source audio SHA-256
- original ASR transcript SHA-256
- whether the current transcript differs from the ASR result
- a pass, review, or quarantine decision

Evidence is held by the server and referenced by an opaque run ID, so the browser cannot replace the measured metrics during compilation. Review-grade audio or any edited ASR transcript requires explicit acknowledgement. Quarantined audio requires a new recording. Derived metrics and hashes enter the proof package; raw audio is excluded.

### 4. Agent Architecture

# Radeon Voice Skill Foundry

Cloudflare product -> authenticated W7900 inference -> verified skill package

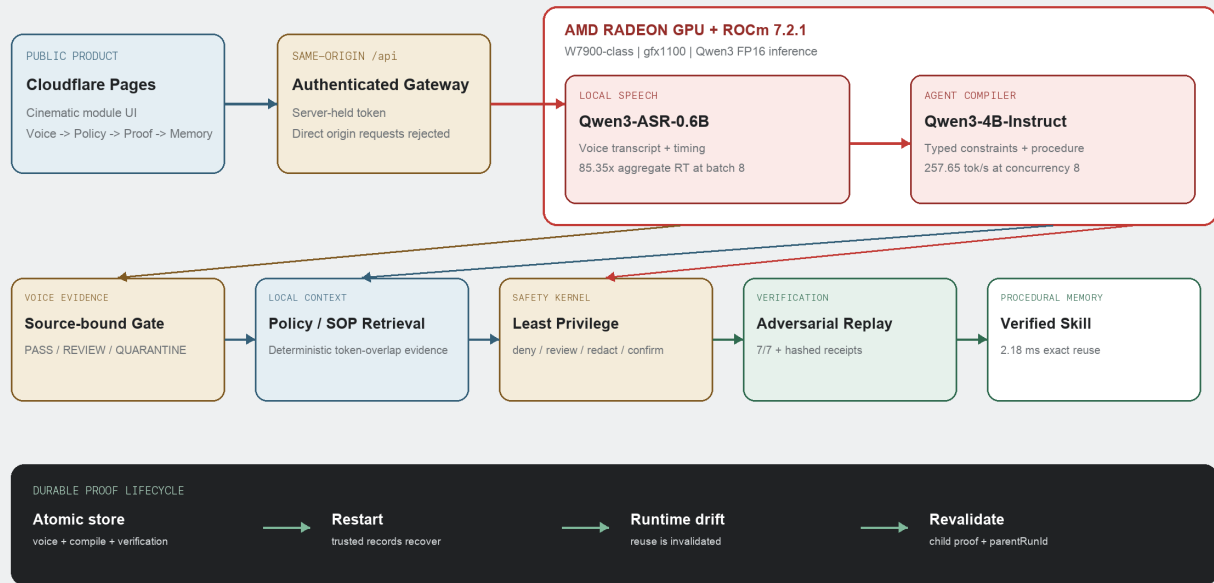

The Product Demo records the public W7900 workflow. Supporting evidence separates performance and lifecycle controls.

Figure 1. Public-to-W7900 voice-to-verified-skill architecture. Core ASR and Agent inference run on Radeon; source evidence, safety, replay, persistence, and hashing remain deterministic.

The architecture has eight deployment and execution layers:

## 1. Public product surface

- Cloudflare Pages module UI
- same-origin authenticated /api gateway

## 2. Capture

- browser microphone or audio upload
- deterministic project-review workspace
- timestamped structured action trace generated by real user commands

## 3. Voice evidence

- deterministic local WAV analysis
- quality gate and source audio hash

## 4. Radeon inference

- Qwen3-ASR-0.6B for local speech recognition
- Qwen3-4B-Instruct-2507 for structured SOP compilation

## 5. Context and planning

- deterministic local policy/SOP retrieval
- typed constraint extraction
- multi-step skill and capability planning

## 6. Safety kernel

- deterministic no-send, privacy, and confirmation guardrails
- least-privilege permission inference

## 7. Verification

- positive and adversarial fixtures
- deterministic tool replay
- governance receipts and artifact hashes

## 8. Procedural memory

- versioned Verified Skill Registry
- exact skill reuse without model replanning
- proof compatibility, invalidation, and child-run revalidation

See ARCHITECTURE . png for the system diagram.

## 5. Core Capabilities

### 5.1 Local Knowledge Retrieval

The system stores local SOP and policy documents in JSON and retrieves relevant evidence with deterministic token-overlap scoring. Retrieved excerpts are injected into the Agent compiler, and the UI shows the selected documents and scores. This implementation does not use embeddings or a vector database.

### 5.2 Tool Calling and Workflow Orchestration

The action model covers local file read/write, report generation, email drafts, email sending, and tentative calendar holds. The generated capability policy separates allowed, review-required, and denied operations.

### 5.3 Real Demonstration Workspace

Runs do not receive a preset action trace. The Voice module contains a deterministic project-review workspace where the user performs six real UI commands:

1. open the private review
2. filter to P0 and P1
3. mark the missing owner for confirmation
4. create email drafts
5. create tentative calendar holds
6. export a redacted report

Each command is accepted by a persistent server-side demonstration session before the UI advances. The server rejects out-of-order or duplicate commands, derives the timestamped typed events, and requires the session to reach 6/6 before compilation. Browser-supplied `actions` are ignored whenever a trusted session ID is present. The simulation never sends email or commits calendar invitations. The exported report uses account aliases, excludes compensation, and omits the P2 finding. Undo or reset invalidates the incomplete trace.

Verification binds the session ID, six events, event count, and SHA-256 action contract hash into the proof core. The exported proof ZIP includes a separate `action_contract.json` for direct inspection of the trusted demonstration independently from the generated policy.

#### 5.3.1 Sandbox Replay

The trusted action contract is replayed against an isolated deterministic workspace rather than represented only as a test label. Each of the six steps records:

- action type and sequence
- governance decision
- before and after state hashes
- changed state fields
- controlled output summary

The replay produces two email drafts, two tentative calendar holds, two redacted report records, and zero external side effects. It then runs five fail-closed probes:

1. automatic email sending
2. P2 scope escape
3. compensation or customer-name leakage
4. missing-owner guessing
5. outbound network write

Any failed replay step or probe quarantines the skill. The proof schema binds the complete replay and verifier identity. Proofs whose compatibility manifest does not match the active runtime require revalidation. The proof ZIP exposes the machine-readable result as `sandbox_replay.json`.

### 5.3.2 Agent Harness and Independent Verifier Contracts

Each compile produces a server-authoritative harness contract. It declares the accepted typed tools, system-policy source, proof-preserving context strategy, versioned memory behavior, Agent Skill format, deterministic sandbox authority, disabled subagents, and hard budgets for actions, constraints, fixtures, revisions, and automated repairs.

Verification independently produces a verifier contract. It declares every fixture, sandbox, and integrity criterion; whether a failure is policy repairable; manual-only voice, runtime, and sandbox categories; server-side verifier isolation; zero-external-side-effect requirements; and a maximum of two repair attempts. The harness and verifier SHA-256 hashes are bound into proof schema `0.5.0` and the compatibility manifest. Proof ZIPs expose `harness.json`, `verifier.json`, and `verifier_feedback.json`.

### 5.3.3 Bounded Verify-Refine-Reverify

Quarantined policy and permission failures may enter a user-triggered bounded repair loop. The API accepts only a trusted server run ID. It ignores browser-supplied compilation and action replacements, verifies the current run, and uses only structured verifier findings to produce a repair instruction.

The repair creates an immutable child revision, records `source: verifier` and the triggering finding IDs, preserves every parent constraint, regenerates permissions and fixtures, and verifies the child. The loop stops when verified, when the two-attempt budget is exhausted, or when any finding requires manual intervention. Voice evidence, runtime failures, and unmapped sandbox failures are never silently rewritten.

`AGENT_HARNESS_REPAIR_EVIDENCE.json` provides a reproducible failure-injection case: revision 1 is modified to allow `mail:send`, verification quarantines it, the verifier emits a critical repairable permission finding, and revision 2 restores `mail:send = deny` and verifies. The accompanying `AGENT_HARNESS_REPAIR_PROOF.zip` contains both contracts, structured feedback, revision lineage, the complete repair cycle, and the final proof bundle.

## 5.4 Multi-Step Planning

Spoken intent and action events are compiled into an ordered procedure, constraints, permissions, fixtures, and proof artifacts. Natural-language refinement creates parent/child revisions instead of overwriting provenance.

## 5.5 Local Memory

Verified skills persist locally with version numbers, proof evidence, and reuse counts. Reusing an exact skill bypasses model generation while retaining the previously verified policy and fixtures.

### 5.5.1 Promotion, Revocation, and Rollback

Verification alone does not make a skill reusable. The registry uses four explicit lifecycle states:

1. candidate: verified but awaiting human promotion
2. promoted: reusable while proof compatibility remains current
3. superseded: immutable history replaced by a newer promoted version

4. `revoked`: disabled by an explicit governance decision

Promotion binds the current proof hash and writes a governance receipt. Promoting a newer version automatically supersedes the previous promoted version of the same skill. Revocation requires a written reason and blocks reuse immediately.

Rollback does not mutate or reactivate the historical object. The selected superseded or revoked version is revalidated under the current runtime and verifier, then copied into a new promoted version with a higher version number, parent proof lineage, and a `ROLLBACK` receipt. This keeps the lifecycle auditable while restoring a last-known-safe policy.

## 5.5.2 Promotion Impact Review

Promotion first requests a server-generated comparison between the candidate and the currently promoted version of the same skill. It reports permission decision changes, added or removed constraints, action-type changes, and runtime identity drift.

Permission escalation, removed explicit denials, removed `must_not` or `redact` guardrails, and a new `send_email` action receive high or critical severity. The UI requires explicit risk acknowledgement before approval.

The candidate proof hash, baseline proof hash, complete diff, and risk list are hashed into a `reviewHash`. Promotion must submit that exact hash. If the candidate or promoted baseline changed after review, the server rejects the approval as stale. The resulting `PROMOTE` receipt records the review hash, risk level, and acknowledgement state.

## 5.5.3 Governance Audit Ledger

Promotion, Supersede, Revoke, and Rollback events are persisted in a separate append-only governance ledger. Each entry contains a monotonically increasing sequence, previous entry hash, canonical payload hash, current entry hash, receipt ID, action, skill/version, resulting lifecycle, proof hash, and optional review/risk/reason/linkage metadata.

Integrity verification checks sequence continuity, previous-hash linkage, payload and entry hashes, duplicate receipt IDs, and bidirectional consistency between the ledger and each skill's embedded governance receipts. Modified payloads, deleted tail events, and deleted middle events produce an explicit `invalid` ledger with issue details.

The bundled `GOVERNANCE_LEDGER.jsonl` is a verified workflow sample with one `PROMOTE` entry. Supersede, revoke, and rollback are implemented product actions covered by the regression suite; the submission does not claim that all four action types appear in this sample export.

Existing pre-ledger receipts are imported once, in deterministic timestamp and receipt-ID order, only when no ledger exists. Subsequent reads never repair a non-empty ledger, so deletion or tampering remains observable. New governance operations fail closed when ledger integrity is invalid. The Memory module shows status, head hash, issues, and ordered entries, and exports the chain as JSONL.

This is a local integrity mechanism, not an externally anchored audit service. Entries are hashed but not digitally signed. An attacker able to rewrite both the ledger and all corresponding skill-memory records is outside the current threat model.

## 5.6 Permission and Privacy Controls

High-risk policy is enforced ahead of model output. In the reference scenario:

- `mail:draft` is allowed
- `calendar:draft` is allowed
- report output is restricted to a local workspace
- `mail:send` is denied
- arbitrary desktop control is denied

- unapproved network writes are denied
- compensation and identifiers are redacted

The text-only workflow proof preserves `mail.send = deny` and passes 6/6 workflow fixtures. Audio-backed promotion adds the Voice Evidence Gate as a seventh critical fixture. The pinned Radeon audio-backed run passes all 7/7 fixtures while using a server-authoritative compile run.

## 5.7 Voice Evidence and Promotion Control

Audio-backed runs add a critical verification fixture. A `pass` result with an unchanged ASR transcript can proceed. A `review` result or edited transcript must carry explicit acknowledgement. A `quarantine` result prevents the skill from entering Verified Skill memory.

The existing synthetic Chinese SOP WAV measured 20.39 seconds at 16 kHz mono, -18.36 dBFS RMS, -2.94 dBFS peak, zero clipping, and 17.17% near-silence, producing an internal quality-gate result of `pass / 100`. This value is not a word-error-rate or external ASR benchmark.

Voice Evidence also measures estimated SNR, noise floor, speech level, crest factor, DC offset, short dropout, multi-frame burst loss, and channel imbalance. On the W7900 robustness suite, clean audio passed at 100, a 120 ms burst loss entered review at 88, and a 280 ms burst loss was quarantined at 65.

# 6. Model and Local Deployment

## Agent Model

- Model: Qwen/Qwen3-4B-Instruct-2507
- Precision: FP16
- Runtime: Transformers or vLLM + PyTorch ROCm
- Serving: local OpenAI-compatible HTTP service on the W7900

Qwen3-4B was selected after testing a smaller 0.6B model. The smaller model was faster but misclassified important structured constraints. The 4B model provided materially better constraint quality while remaining practical on the provided Radeon allocation.

## Speech Model

- Model: Qwen/Qwen3-ASR-0.6B
- Precision: FP16
- Runtime: Transformers + PyTorch ROCm
- Serving: persistent local HTTP service

Browser audio is converted to 16 kHz mono WAV before local transcription.

## Radeon Environment

- Allocation: Radeon Pro W7900-class
- Architecture: gfx1100
- VRAM: 47.98 GiB
- ROCm: 7.2.1
- Radeon experiment PyTorch: 2.9.1 ROCm
- Radeon experiment vLLM: 0.16.1 development ROCm build
- Radeon experiment Triton: 3.5.1

No closed remote API implements the core Agent or speech path.



## 7. Radeon Performance

### Agent Inference

Three steady-state runs with Qwen3-4B:

| Median TTFT                  | 108.87 ms             |
|------------------------------|-----------------------|
| Median generation throughput | 22.02 tokens/s        |
| Peak allocated VRAM          | 7.72 GiB              |
| Structured SOP compilation   | approximately 21.51 s |

### Speech Recognition

Qwen3-ASR warm benchmark:

| Warm median inference | 0.2339 s         |
|-----------------------|------------------|
| Warm median RTF       | 0.0556           |
| Warm speed            | 17.98x real-time |
| Peak allocated VRAM   | 1.752 GiB        |

The reproducible synthetic Chinese SOP fixture completed the end-to-end voice pipeline at 3.71x real-time and preserved the no-send safety rule. The fixture is explicitly synthetic and is not represented as a human recording.

Pinned audio-backed run on the same Radeon allocation:

| Source commit                | c759a41          |
|------------------------------|------------------|
| Pinned snapshot tests        | 21/21 passed     |
| SOP audio duration           | 20.39 s          |
| ASR inference                | 1.4259 s         |
| ASR RTF                      | 0.0699           |
| ASR speed                    | 14.3x real-time  |
| Internal Voice Evidence Gate | pass / 100       |
| Agent compile duration       | 24.1331 s        |
| Agent TTFT                   | 368.16 ms        |
| Agent throughput             | 20.07 tokens/s   |
| Agent peak VRAM              | 8.001 GiB        |
| Verification                 | 7/7 passed       |
| Permission result            | mail.send = deny |

The client verification payload was deliberately modified to claim `mail.send = allow`. The server resolved the authoritative compile run and returned `mail.send = deny`, demonstrating that browser-supplied proof fields are not trusted.

The submission regression suite passes 68/68 locally, together with typecheck and the production build. The Radeon experiment source commit was clean-cloned on Radeon and passed 33/33 plus the production build.

The real demonstration workspace also completed the text-only local path: six captured UI events -> compile -> `mail.send = deny` -> 6/6 workflow fixtures -> verified proof. Audio-backed runs add Voice Evidence as the seventh fixture and remain separately validated at 7/7 on Radeon.

## 8. Targeted Radeon Optimization

### 8.1 Compact Structured Output

The baseline required the model to generate final IDs and confidence values. The optimized protocol lets the model generate semantic fields only and lets the TypeScript runtime add IDs and calibrated confidence.

Three runs per variant on the same W7900-class allocation:

| Median output tokens      | 656         | 463         | -29.42%     |
|---------------------------|-------------|-------------|-------------|
| Median generation latency | 30.80 s     | 21.55 s     | -30.03%     |
| Median throughput         | 21.30 tok/s | 21.49 tok/s | +0.19 tok/s |
| Safety semantic gate      | pass        | pass        | preserved   |

Every compact run was required to produce:

- a `must_not` rule covering email sending
- a `redact` rule covering compensation data

The optimization reduces total generation time by reducing unnecessary output, not by claiming a higher token-generation rate.

### 8.2 Identical-Skill Application Fast Path

The full optimized compilation measured 24,093.42 ms HTTP round-trip. Exact reuse of the already-verified skill measured 2.18 ms median HTTP round-trip over five calls.

Measured request-latency ratio:

$$24,093.42 / 2.18 = 11,052.03x$$

Each reuse avoided 506 model output tokens.

This ratio applies only to an identical promoted-skill lookup and avoids a repeat model call. It is not a fresh-inference GPU speedup and is not claimed for changed SOPs, approximate search, or arbitrary Agent replanning.

### 8.3 Optimized Serving and ASR Batching

The Radeon serving study compared the same Qwen3-4B FP16 model on the same W7900 using serialized Transformers, vLLM eager, and vLLM graph serving. Each configuration used heterogeneous SOP prompts, concurrency 1/2/4/8, three bursts, semantic safety gates, and per-second GPU telemetry.

| Aggregate output throughput | 20.66 tok/s | 257.65 tok/s | 12.47x    |
|-----------------------------|-------------|--------------|-----------|
| Median burst wall time      | 22.85 s     | 1.86 s       | -91.85%   |
| Semantic gate pass rate     | 100%        | 100%         | preserved |

Native Qwen3-ASR batch-eight reached 85.35x aggregate real-time and was 6.659x faster than sequential inference for the same eight inputs.

These serving and batching measurements complement the compact-output and exact reuse optimizations: vLLM improves concurrent fresh compilation, batching improves multiple audio inputs, compact output shortens each generation, and Verified Skill reuse removes identical replanning entirely.

## 8.4 Quark Quantization Acceptance Study

A same-hardware Quark study tested whether quantization should replace FP16 for the policy compiler.

Quark successfully exported an INT4 W4A16 model:

- source directory: 8.06 GB
- INT4 directory: 2.68 GB
- storage reduction: 66.73%

The installed ROCm vLLM Quark loader did not support that signed INT4 per-group, group-size-128 weight-only scheme, so no W4A16 serving claim is made.

Quark INT8 W8A8 served through vLLM's `TritonInt8ScaledMMLinearKernel`:

| Model directory               | 8.06 GB  | 4.43 GB  | -45.07% |
|-------------------------------|----------|----------|---------|
| Model-load VRAM               | 7.67 GiB | 4.29 GiB | -44.07% |
| KV-cache tokens at 25% budget | 27,520   | 51,856   | +88.43% |

However, the 128-sample calibrated INT8 model was not acceptable:

| C8 aggregate throughput       | 253.74 tok/s | 160.61 tok/s |
|-------------------------------|--------------|--------------|
| Complete safety-semantic gate | 51/51        | 11/51        |
| Strict JSON                   | 51/51        | 2/51         |

The tokenizers produced identical prompt and chat-template token sequences, so tokenizer drift does not explain the regression.

The engineering decision is to retain FP16 and quarantine this INT8 artifact. For a policy compiler, preserving no-send, redaction, confirmation, and conditional-scope rules has priority over memory savings.

## 8.5 Adaptive Precision Controller

The adaptive precision experiment tested whether strict JSON Schema could recover the degraded INT8 model and added a fail-closed precision router.

| Raw INT8                           | 0/12  | 0/12  | 6.81 s  |
|------------------------------------|-------|-------|---------|
| Schema-constrained INT8            | 2/12  | 0/12  | 11.84 s |
| Adaptive result with FP16 fallback | 12/12 | 12/12 | 19.42 s |

The schema recovered output shape in two cases but never recovered every required policy kind. The admission controller rejected all twelve INT8 responses and selected FP16.

A real audio-backed product run then passed the internal Voice Evidence gate at `pass / 100`, recorded `selected = fallback` plus the missing policy kinds in the proof core, preserved `mail.send = deny`, passed 7/7 fixtures, and generated a valid proof ZIP.

The resulting control flow is:

`low precision -> JSON Schema -> semantic admission -> FP16 fallback -> proof`

The current production path remains direct FP16 because the INT8 admission rate is zero. The controller is a safety boundary for future low-precision variants, not a claim of lower current latency.

## 9. Verification and Proof

The system generates adversarial fixtures for:

- automatic email sending
- sensitive-field leakage
- conditional-scope violations
- missing confirmation
- unapproved network writes

Verification executes against a deterministic local tool workspace. High-risk decisions issue governance receipts containing:

- decision (ALLOW, REVIEW, or BLOCK)
- fixture ID
- enforcing rule IDs
- payload hash
- timestamp

The proof package includes:

- SKILL.md
- policy.yaml
- fixtures.json
- receipts.jsonl
- proof\_bundle.json
- voice\_evidence.json for audio-backed runs
- reproduction notes

Product Demo proof ZIP SHA-256:

7898d888112b113d53fce7ca2f9f46eecdaf318c79625af665fa908622f78cc2

The continuous operation proof additionally binds `parentRunId`, `revision: 2`, and the changed runtime identity before the proof core is hashed.

## 10. Track 2 Fit

Radeon Voice Skill Foundry implements all five optional functional capability categories in the Track 2 rules:

| Local knowledge retrieval | deterministic token-overlap retrieval over local policy/SOP documents |
|---------------------------|-----------------------------------------------------------------------|
| Tool invocation           | typed file, mail, calendar, and report capabilities                   |
| Multi-step planning       | voice/action trace to skill, policy, tests, and proof                 |
| Local multi-turn memory   | versioned skills and parent/child revisions                           |
| Permission/privacy        | deny/review/allow policy, redaction, receipts                         |

The Radeon implementation also includes both required engineering dimensions:

- core ASR and Agent inference run locally on Radeon + ROCm
- targeted inference optimization is measured with raw benchmark evidence

## 11. Technical Contribution

The primary contribution is **voice-seeded cold-start verification for local Agent Skills**.

Existing workflow learning commonly distills procedures from repeated successful executions. Radeon Voice Skill Foundry instead captures expert intent before the first risky execution and produces evidence that a future skill marketplace, operator, or local Agent runtime can inspect.

The implemented transformation is:

```
private voice + source evidence + action trace -> governed skill + adversarial proof
```

## 12. Reproduction

Local fallback:

```
npm install
npm run build
npm test
npm start
```

Radeon model services:

```
. /workspace/.venv-rvsf/bin/activate
python scripts/radeon_model_server.py
python scripts/radeon_asr_server.py
```

Application environment:

```
RADEON_OPENAI_BASE_URL=http://127.0.0.1:8000/v1
RADEON_MODEL=Qwen/Qwen3-4B-Instruct-2507
RADEON_ASR_BASE_URL=http://127.0.0.1:8001
RADEON_ASR_MODEL=Qwen/Qwen3-ASR-0.6B
RADEON_GPU_NAME="AMD Radeon Pro W7900-class gfx1100 48GB"
ROCM_VERSION="ROCm 7.2.1"
```

Optimization benchmark:

## 13. Public Deployment and Demo Evidence

The public product is deployed at:

<https://radeon-voice-skill-foundry.pages.dev/>

Cloudflare Pages serves the cinematic module UI. A same-origin Pages Function injects a server-held token and forwards API calls to the W7900 backend; direct unauthenticated origin requests are rejected.

The Product Demo and supplementary videos have separate evidence roles:

- `RADEON_VOICE_SKILL_FOUNDRY_DEMO.mp4` records the complete frozen public product continuously: voice, six server-authoritative actions, real W7900 ASR and skill compilation, Sandbox Replay, Promotion Impact Review, proof-hash-checked promotion, Governance Audit Ledger export, and exact reuse.
- `RADEON_VOICE_SKILL_FOUNDRY_PERFORMANCE_DEMO.mp4` records the live Cloudflare product executing real W7900 Qwen3-ASR and Qwen3-4B inference. The actual model wait is preserved and no cached policy replaces generation.
- `CONTINUOUS_OPERATION_DEMO.mp4` uses deterministic ASR/compiler fixtures while executing two real Node API restarts, durable recovery, runtime drift, proof invalidation, and child-run revalidation in one take. It is lifecycle evidence, not GPU performance evidence.

## 14. Limitations and Next Steps

- The direct compact-output A/B uses three runs per variant.
- The full-compilation evidence is one end-to-end sample.
- Exact reuse requires an identical stored skill; changed intent triggers recompilation and verification. The measured ratio is an application fast path, not a fresh-inference GPU speedup.
- The serving study includes isolated Transformers FP16, vLLM eager FP16, and vLLM graph FP16 runs on the same W7900 allocation. At concurrency eight, vLLM graph delivered 257.65 aggregate output tokens/s versus 20.66 for the serialized Transformers server.
- The tool workspace is deterministic for reproducible demonstrations and tests. Production connectors should retain the same capability gate and receipt model.
- The Voice Evidence Gate uses deterministic signal measurements and does not claim a learned acoustic-diagnosis model.
- Full far-field ASR accuracy should be evaluated separately against a benchmark such as the Treble/Hugging Face FFASR leaderboard.
- The Quark INT4/INT8 study is complete. INT8 improves capacity but is slower and fails the required semantic acceptance gate, so it is not promoted.
- FP8 remains untested because loader registration alone does not prove a native accelerated FP8 path on RDNA3 gfx1100.
- The stable Cloudflare Pages URL currently depends on a W7900 Quick Tunnel.

Its rotating origin is registered in Cloudflare KV by a Supervisor-managed W7900 process. The registrar validates the HTTPS `trycloudflare.com` candidate through the public tunnel and signs a fresh Radeon health proof with the API token. Pages verifies that proof plus an independent recovery token before writing KV. This allows a tunnel restart without a frontend redeploy. A named Tunnel remains the preferred infrastructure upgrade.

- The governance ledger detects inconsistent local records through hashes and cross-checks. It is not externally signed or immutably anchored.
- The Product Demo's recorded GAIA-compatible phrase refers only to portable Agent Skill Markdown. No external GAIA conformance or certification is claimed.

## 14.1 Lifecycle Engineering

The product includes three lifecycle controls that are separate from the measured Radeon claims:

1. **Durable trusted runs.** Voice evidence, server-authoritative compile runs, and verification results are atomically persisted and recovered after service restart.
2. **Proof compatibility and invalidation.** The proof binds verifier identity, runtime identity, tool contract, policy, skill definition, and voice evidence schema. Changed inputs move a stored skill to `revalidation_required`; reuse is blocked until a new child proof passes.
3. **Voice Evidence diagnostics.** Deterministic analysis reports estimated SNR, noise floor, speech level, crest factor, DC offset, short dropouts, multi-frame burst loss, and channel imbalance. A measured 280 ms burst-loss case is quarantined at 65/100. These remain deterministic measurements and do not claim learned acoustic diagnosis.

The submission regression suite passes 68/68 tests locally, with typecheck and production build. A single-take browser demo shows upload, voice-evidence analysis, compile, 7/7 verification, save, reuse, service restart recovery, runtime invalidation, one-click revalidation, and proof download.

The current submission also includes a reviewer-oriented quickstart and a single verification command:

```
npm ci
npm run verify:submission
```

This command regenerates the governed agent-harness repair evidence, runs the 68-test suite, typechecks, builds the production frontend, checks the finalized SHA-256 manifest, and verifies that the Project Specification PDF contains the current P0 proof text.

The Product Demo preserves the real W7900 model wait and records the server-backed teaching and governance workflow. The Performance Demo is the optimization-oriented Radeon recording. The Continuous Operation Demo is the isolated lifecycle-control recording.

Sandbox Replay is deterministic verification evidence. It does not replace or alter the separately measured Radeon ASR, model-serving, quantization, or adaptive-precision performance claims.

The governance lifecycle is also product-control evidence rather than a new GPU performance claim. It closes the operational gap between proof generation and safe procedural-memory reuse.

Promotion Impact Review is governance evidence rather than a new GPU performance claim. It does not change the pinned Radeon measurements.

The Governance Audit Ledger is local operational-integrity evidence and does not change the pinned Radeon measurements.

The public Radeon service was rebuilt and recovery-tested on August 2, 2026. The stable Pages health endpoint now probes the Qwen3-4B and Qwen3-ASR dependencies instead of inferring health only from environment variables. Stopping the ASR process produced HTTP 503 with `asr = unavailable`; supervisor restarted the model and restored HTTP 200 in about 20 seconds. A controlled Quick Tunnel rotation restored the stable Pages URL in about 25 seconds through signed origin registration and Cloudflare KV. The six managed services and live ASR, compile, verify, and proof results are recorded in `LIVE_RADEON_RECOVERY_EVIDENCE.json`.

An independent watchdog runs outside Supervisor and checks its control socket every 30 seconds. In a controlled Supervisor shutdown, the watchdog waited for three consecutive failures, restarted Supervisor, restored all six

managed services, and reached stable public HTTP 200 in about 161 seconds without operator intervention. The local 5-minute launchd monitor and the active GitHub Actions health workflow provide external detection independent of the Radeon service process tree. GitHub Actions requests four offset checks per hour, but scheduled execution is best-effort; the submission reports observed run timestamps and conclusions in `GITHUB_SCHEDULED_HEALTH_SUMMARY.json` instead of claiming an exact 15-minute execution interval.

This recovery design handles child-process, Supervisor-main-process, and Quick Tunnel failures while the Radeon Cloud instance exists. It cannot recreate an instance deleted by the platform or recover a stopped host. The account still showed five available credits and zero consumed credits after more than two hours of runtime on August 2, despite the nominal one-credit-per-GPU-hour UI text. Continued availability therefore still depends on the organizer keeping the instance allocation active through judging.

Source commit `efec128059fea3b68521aa1dd333c71d5ea6a679` was clean-cloned on Radeon Cloud. `npm ci`, 29/29 tests, and the production build passed on ROCm 7.2.1, `gfx1100`, with 51,522,830,336 bytes of VRAM.

The serving and robustness experiment is pinned to source commit `20776d9`. A clean Radeon clone of that commit passed `npm ci`, 33/33 tests, and the production build. The same commit replayed clean, 120 ms burst-loss, and 280 ms burst-loss samples through the real `/api/transcribe` endpoint.

## 14.2 Presentation Asset Disclosure

Demo narration uses AIDP `gemini-3.1-flash-tts-preview`, male voice Charon, with burned-in English captions and an embedded subtitle track. Demo backgrounds use GPT Image 2. Project labels, diagrams, and reported measurements were derived or typeset from repository evidence. These presentation tools do not provide the product's core Agent or ASR functions.

## 15. Evidence Index

- Source: <https://github.com/Chengyuann/radeon-voice-skill-foundry>
- Live product: <https://radeon-voice-skill-foundry.pages.dev/>
- Judge quickstart: `JUDGE_QUICKSTART.md`
- Reproducibility guide: `REPRODUCIBILITY.md`
- Technical evidence index: `TECHNICAL_EVIDENCE_INDEX.md`
- Agent harness repair evidence: `AGENT_HARNESS_REPAIR_EVIDENCE.json`
- Agent harness repair proof: `AGENT_HARNESS_REPAIR_PROOF.zip`
- Live Radeon recovery evidence: `LIVE_RADEON_RECOVERY_EVIDENCE.json`
- Multi-turn interaction brief: `MULTI_TURN_INTERACTION.md`
- Parent-child lineage: `MULTI_TURN_LINEAGE.png`
- Product Demo: `RADEON_VOICE_SKILL_FOUNDRY_DEMO.mp4`
- Verified workflow proof: `VERIFIED_WORKFLOW_PROOF.zip`
- Multi-turn refinement: `MULTI_TURN_REFINEMENT.png`,  
`MULTI_TURN_REFINEMENT.json`, and `MULTI_TURN_REFINEMENT_PROOF.zip`
- Governance ledger: `GOVERNANCE_LEDGER.jsonl`
- Performance Demo: `RADEON_VOICE_SKILL_FOUNDRY_PERFORMANCE_DEMO.mp4`
- Performance proof: `PERFORMANCE_DEMO_PROOF.zip`
- Continuous Operation Demo: `CONTINUOUS_OPERATION_DEMO.mp4`
- Continuous Operation proof: `CONTINUOUS_OPERATION_PROOF.zip`
- Hardware benchmark: `evidence/HARDWARE_BENCHMARK.json`
- Compact-output benchmark: `evidence/COMPACT_OUTPUT_BENCHMARK.json`
- Serving and ASR summary: `evidence/RADEON_SERVING_AND_ASR_SUMMARY.json`



- Quark summary: evidence/QUARK\_QUANTIZATION\_SUMMARY.json
- Adaptive precision summary: evidence/ADAPTIVE\_PRECISION\_SUMMARY.json
- Adaptive precision product run: evidence/ADAPTIVE\_PRECISION\_E2E.json
- Package integrity: SHA256SUMS.txt (covers every finalized artifact except the checksum manifest itself)