LIFELINE: An Auditable Rule–State Benchmark for Self-Play

Anonymous Authors

Abstract

We introduce LIFELINE, a deterministic self-play benchmark designed to expose confounding between physical occupancy, player-specific logical connectivity, cascading removal, repetition history, and legal-action masks. The benchmark provides exact snapshots, replayable trajectories, and explicit observation projections for rule and state audits. Complete side-five enumeration finds reachable latent topology differences but no difference in legal actions, transitions, exact values, or optimal actions. A standard-start side-six paired-history witness reaches the same deliberately mask-free topology while Superko changes the legality of one shared placement; the implemented masks still differ, so the witness is not an implemented-observation alias.

We also report a receipt-bound audit of padded-CNN, physical-edge Grid-GNN, and typed-edge Topology-GNN baselines on jointly trained sizes 5, 7, and 9. All 45 final seed scores against Random exceed 0.5, while direct-play summaries against UCT-MCTS-16 are heterogeneous and each evaluation task repeats only two deterministic trajectories. These results are descriptive and do not support a global representation ranking, a learned feature benefit, or unseen-size generalization. LIFELINE is therefore presented as an auditable benchmark and diagnostic resource, with stronger causal and cross-game claims left for future experiments.

1 Introduction

Board-game agents are often evaluated as if the visible board were the whole state. That assumption becomes difficult to audit when rules maintain hidden connectivity, cascade removals, or repetition history, and when the learning interface also exposes an invalid-action mask. A benchmark can then report a representation difference without showing whether the difference is caused by the intended structural input, by legality information, or by an evaluation artifact.

LIFELINE is designed to make these distinctions explicit. Its triangular lattice separates rendered occupancy from player-specific logical connectivity; attacks can cut edges and remove disconnected components; and a Superko rule makes legality depend on the complete history. We use the game as a controlled audit setting rather than as evidence that one neural representation is universally better. The questions are: (1) which state components can be separated and replayed exactly, (2) when does a weaker observation projection hide a legality difference, and (3) what can a small, receipt-bound self-play comparison actually establish?

Our contributions, each tied to an auditable artifact and an explicit boundary, are:

1. an auditable, variable-size self-play environment with exact snapshots, legal masks, replayable trajectories, and recorded rule-engine parity traces;
2. a diagnostic protocol that separates latent topology differences from decision-relevant legality, including an exhaustive side-five negative result and a bounded side-six mask-free history witness; and
3. a frozen five-seed baseline audit backed by 330 receipts and 30,600 task-indexed replay-verified game records, together with explicit limits on what the comparison can say about representations.

The benchmark contribution does not depend on a positive model result. We do not claim that topology or compact history improves learning, that the implemented Grid observation is non-Markov, that any representation is globally superior, or that the results generalize to unseen sizes or other games without corresponding formal evidence.

Claim control. A frozen claim–evidence–limitation ledger accompanies the draft. Every primary claim names its authoritative CSV/JSON or verifier and retains the relevant scope restriction; failed and inconclusive cells remain in all tables.

2 Related Work

Self-play and game environments. AlphaGo Zero and AlphaZero established policy–value learning with search from self-play, while expert iteration, ELF OpenGo, and MuZero broadened the algorithmic and reproducibility picture [26, 27, 2, 30, 25]. General-purpose multi-agent and game testbeds include OpenSpiel and PettingZoo [22, 29]; PGX supplies hardware-accelerated parallel game simulators for reinforcement learning [21]. MCTS is surveyed by Browne et al. [5]. LIFELINE is narrower than these platforms but targets a particular confound: rendered occupancy, player-specific logical connectivity, and repetition history can be distinct parts of simulator state.

General game systems and structural transfer. Ludii and Regular Boardgames provide complementary declarative systems for representing and executing board-game rules, including dedicated reasoning work for the latter [23, 19, 20]; Polygames supplies zero-learning infrastructure across multiple games [7]. Prior work transfers policy–value networks across Hex sizes, games, and variants [9, 28]; AlphaZero with GNNs has also been studied for scaling from small to larger board games [4]. Graph representations are evaluated directly in chess RL and DQN-based Hex agents [24, 17]. These studies are the closest empirical neighbors, but do not establish topology-input superiority in LIFELINE or unseen-size transfer for our models.

Graph representations and size. Message passing, inductive graph learning, relational biases, and graph reinforcement learning motivate explicit structural inputs [10, 12, 3, 14]. Work on neural algorithm execution, combinatorial optimization, and TSP generalization shows why graph structure alone does not justify extrapolation claims [34, 15]. We therefore compare representations only on jointly trained sizes and reserve unseen-size evaluation for future formal artifacts.

State sufficiency, masks, and repetition. Partial observability, perceptual aliasing, and state abstraction formalize the risks of discarding history or decision-relevant variables [16, 8, 11, 1]. Invalid-action masking further shows that legality information is part of the learning interface [13]. Graph-history interaction is an established rules/search issue [6, 18], including in Chinese chess [33]. Go's legality, combinatorics, and legal-position counting provide closely related precedent for repetition-sensitive state accounting [32, 31]. Our diagnostics accordingly distinguish a full simulator state, an implemented masked observation, and deliberately weaker projections.

3 The LIFELINE Benchmark

3.1 Board and actions

A board of side length n contains

$$N(n) = \frac{n(n+1)}{2} \tag{1}$$

valid lattice points. A turn selects one lattice point or the pass action, for $N(n) + 1$ discrete actions. The main benchmark uses two players and canonicalizes the observation to the player to act.

3.2 Physical occupancy and logical topology

Let B_t denote physical point occupancy and let $E_t^{(b)}, E_t^{(w)}$ denote the explicit logical edge sets of the two players. Physical line points are used for rendering and blocking, whereas logical edges define connectivity to the protected initial node. An attack can break an edge and remove nodes and line points that are no longer logically connected.

3.3 Full simulator state

We model the full state as

$$x_t = \left(B_t, E_t^{(b)}, E_t^{(w)}, H_t, p_t, c_t, z_t\right), \tag{2}$$

where H_t is the visited-state set used by the repetition rule, p_t is the player to act, c_t is the consecutive-pass count, and z_t is the terminal flag and cached terminal outcome. Resignation is outside the frozen training environment.

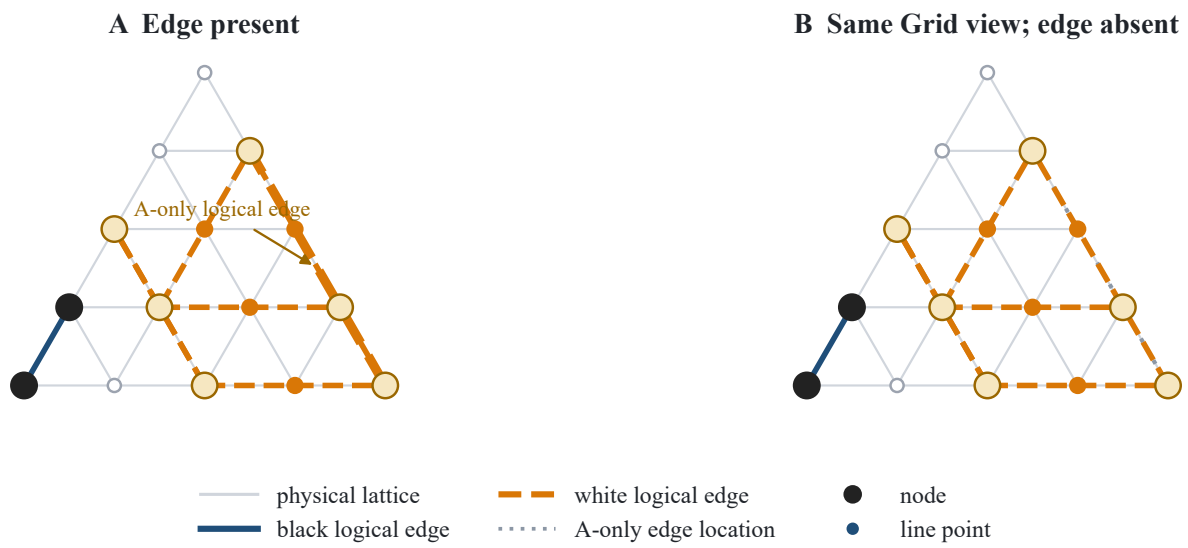


Figure 1: A replay-verified state pair reconstructed from the frozen side-five witness ledger. Both reachable states have identical occupancy, player to act, pass count, and legal mask; only history A contains the highlighted white logical edge. The dotted segment in history B marks that edge's absent location. This demonstrates latent topology aliasing only: the exhaustive side-five audit found no decision-relevant consequence.

Table 1: Pre-registered observation variants from the frozen benchmark protocol. The simulator always retains the exact full state; the table does not imply that any exposed feature is independently necessary.

Name	Exposed structure	Purpose
Grid	Occupancy and turn features	Flat/spatial baseline
GridGraph	Grid plus fixed lattice edges	Size-agnostic graph baseline
Topology	GridGraph plus typed logical edges	Topology-input baseline
TopologyHistory	Topology plus compact history features	Planned history ablation

3.4 Observation protocols

All four protocols also expose the player to act, consecutive-pass count, and legal-action mask. Thus a legal-set difference alone is not an alias under the implemented Grid protocol; it is an alias only for a separately named mask-free occupancy projection.

3.5 Rules and terminal reward

The executable rules distinguish occupied nodes, physical line points, and logical edges. Point actions extend or attack connectivity subject to protected regions and the three-point restriction; attacks can cut edges and cascade through components disconnected from a player's protected root. Superko transactionally rejects repeated canonical positions. Passing and automatic skips use the exact consecutive-pass terminal rule, after which discrete territory determines the winner. Training uses only terminal win/draw/loss reward $(+1, 0, -1)$.

3.6 Implementation and validation

The dependency-free Python environment uses a fixed point ordering followed by PASS, lossless cloning and versioned serialization, legal-action masks, and replayable action sequences. The frozen environment/search suite contains 62 passing tests. An expanded repository discovery snapshot on 2026-08-25 ran 88 tests: 81 passed and seven optional PyTorch-dependent tests were skipped because the dependency was unavailable; skips are not counted as failures. Five targeted and 60 seeded random trajectories match the independent Web rule engine step by step across side lengths 5, 7, 9, 10, 12, and 15. Targeted tests assert exact component deletion, edge-only cuts, edge restoration, and transactional Superko

rollback. Median end-to-end throughput in a three-repeat local engineering benchmark ranges from 1,574 transitions/s at side length 5 to 19.3 transitions/s at side length 15. These measurements include legal-mask and observation construction and are not optimized simulator-only timings.

4 State-Aliasing Diagnostics

Definition 1 (Implemented Grid equivalence)**.** *Two full states x and x' are Grid-equivalent if their implemented Grid observations are identical: physical occupancy, fixed coordinate features, player to act, consecutive-pass count, and legal-action mask all agree. Logical edges and exact repetition histories may differ.*

We use *occupancy projection* for the deliberately weaker map that omits the action mask. Results for that projection are never reported as aliases of the implemented Grid observation. We use *mask-free Topology projection* for the board, typed logical edges, player to act, consecutive-pass count, and terminal flag, while omitting both the repetition history and legal-action mask. Equality under this projection is likewise not equality of the implemented Topology observation.

Definition 2 (Decision-relevant aliasing)**.** *An observation map ϕ aliases two states in a decision-relevant manner if $\phi(x) = \phi(x')$ but the states differ in legal actions, observable transition outcomes, returns, or optimal actions under a fixed game solution concept.*

Proposition 1 (Reachable topology aliasing: computational witness)**.** *For side length $n = 5$, there exist two legal histories that reach states with identical implemented Grid observations but different logical edge sets.*

Proposition 2 (Side-five negative result: exhaustive computation)**.** *Under the frozen two-player rules and standard side-five start, no pair of reachable Grid-equivalent states differs in legal actions, next Grid observation, exact zero-sum value, shared-action Q value, or optimal-action set. No reachable side-five move is rejected by Superko.*

Proposition 3 (Side-six paired-history legality witness)**.** *Under the frozen two-player rules and standard side-six start, two natural legal histories reach the same mask-free Topology projection but different Superko histories. The shared placement $(2, 3)$ succeeds after one history and is rejected after the other exactly by Superko.*

Evidence and boundary. The complete raw graph contains 25,096 states and 67,505 transitions and is a DAG. It contains 976 Grid-alias groups and 1,088 pairs with different latent logical topology. An independent all-PASS backward-induction audit finds zero strict differences across every pair. This proves a side-five negative result, not nonexistence at sizes 6–15. The replay witness therefore establishes weak full-state aliasing only; the paper does not currently claim that Grid is non-Markov or strategically insufficient across the benchmark family.

For the side-six witness, both histories agree exactly in board values, typed logical edges, player to act, consecutive skips, and terminal status. Their legal placement sets differ only at $(2, 3)$ because the candidate-result key occurs in one retained history and not the other. Independent Python and Web verifiers replay the same persisted candidate from the standard initial state. The witness therefore establishes history-dependent legality under the mask-free Topology projection. It does not establish equal implemented observations, different exact values or optimal actions, or a learning benefit: the implemented Grid and Topology encodings include the differing legal mask.

Witness construction. Complete enumeration is combined with seeded random walks, collision indexing, bounded shared-continuation search, and a candidate-only target-prioritized search. The latter includes PASS and uses its heuristic only to order the frontier; a separate verifier derives the frozen target independently and replays both histories. Versioned witnesses retain legal histories, exact projection payloads, full-state fingerprints, source hashes, and claim boundaries. Unsuccessful searches retain their budgets and are labelled `NOT_FOUND_WITHIN_BUDGET`.

5 Benchmark Protocol

5.1 Search baselines

Random, Greedy, depth-2/3 Minimax, and UCT-MCTS share one color-balanced, replayable arena. Random samples uniformly from all legal point moves and PASS; Greedy is a deterministic one-ply heuristic. Minimax retains at most 20 tactically ordered point candidates plus PASS and is therefore approximate. UCT is adversarial, stores values from the root-player perspective, and uses uniform-random rollouts; the frozen UCT-MCTS-16 opponent uses 16 simulations

per move, exploration constant $\sqrt{2}$, and rollout depth 80. It selects by visit count, then mean value, with seeded random tie-breaking; unterminated rollouts at the depth cap return zero. The simulator handles PASS, automatic skips, terminal scoring, and Superko for every baseline. The complete five-agent matrix remains an engineering smoke test; formal neural evaluation uses Random and UCT-MCTS-16, matched only on the 16-simulation search budget.

5.2 Neural self-play

All models use the same AlphaZero-style pipeline: 16 PUCT simulations, $c_{\text{puct}} = 1.5$, legal-masked priors, root Dirichlet noise $(\alpha, \epsilon) = (0.3, 0.25)$, and temperature 1.0 for 20 plies then 0.1. Each model–seed run has 100 complete mixed-size games and 200 AdamW updates. Complete games contribute root-visit policies and terminal outcomes from the stored player-to-act perspective; truncations never enter replay. Checkpoints at steps 40, 80, 120, 160, and 200 store the optimizer, replay, counters, and RNG states and resume only after hash validation.

5.3 Compute matching and statistics

The three learned model families match five seeds, training schedule, 16-simulation PUCT budget, optimizer, checkpoints, evaluation schedule, and parameter count (maximum spread 0.6982%). This does not constitute compute matching between a learned model and UCT-MCTS-16. Wall-clock and transitions are recorded but not matched; FLOPs and memory are not yet consolidated. The primary descriptive unit is the training seed, with five seeds per cell. Each final seed-level matchup contains 100 same-seed color-swapped pairs; tables report the median and min–max range of the five seed scores. The receipt-bound audit retains pair-score distributions, medians, and ranges for reconciliation. These summaries are descriptive, not confidence intervals or hypothesis tests; no independent-game or multiple-comparison inference is claimed.

6 Baseline Models and Controls

Each lattice point is a graph node with occupancy, role, coordinate, and initial-node features. Typed edges represent (i) fixed triangular-lattice adjacency, (ii) black logical connections, and (iii) white logical connections. A relation-aware message-passing network produces per-node action logits and a pooled scalar value. A separate global logit represents pass.

All inputs are canonicalized to the player to act. Each node receives 11 features: five occupancy indicators, two normalized coordinates, boundary membership, own and opponent initial-node indicators, and the consecutive-pass count. For relation $r \in \{\text{physical}, \text{own}, \text{opponent}\}$, one message-passing layer for a valid node has the form

$$\begin{aligned} u_i^{(\ell)} &= W_0^{(\ell)} h_i^{(\ell)} + b_0^{(\ell)} + \sum_r W_r^{(\ell)} \frac{1}{\max\{1, |\mathcal{N}_r(i)|\}} \sum_{j \in \mathcal{N}_r(i)} h_j^{(\ell)}, \\ h_i^{(\ell+1)} &= \text{LayerNorm}\Big(h_i^{(\ell)} + \text{ReLU}(u_i^{(\ell)}) \Big). \end{aligned} \tag{3}$$

An empty neighborhood contributes a zero message, and padded nodes are masked after every block and before mean pooling. Grid-GNN exposes only the physical relation; Topology-GNN additionally remaps the two color-specific logical edge sets to own/opponent relations. Padded-CNN maps the same node features to a zero-padded square tensor and does not read any edge relation. All models emit one logit per point, a separate PASS logit, and a `tanh` value; padding and illegal actions are masked.

Table 2: Matched model families from the frozen parameter audit. Counts are within 0.6982%, but architectures, FLOPs, memory, and wall time are not matched.

Model	Width	Parameters	Structural input
Padded-CNN	33	62,868	node features only
Grid-GNN	82	62,733	physical lattice edges
Topology-GNN	64	63,171	physical + typed logical edges

Each network uses three residual convolution/message-passing blocks. Widths were chosen before the formal run to keep the maximum parameter spread below the frozen 1% tolerance. TopologyHistory remains a declared observation variant but was not included in the neural comparison.

7 Experiments

7.1 Environment and diagnostic evidence

The frozen environment/search suite has 62 passing tests; 65 targeted or seeded trajectories match an independent Web implementation over sizes 5–15. Complete side-five enumeration covers 25,096 states and 67,505 transitions. All 1,088 topology-distinct Grid-equivalent pairs have identical legal sets, one-step observations, exact values, shared-action values, and optimal actions. A PASS-aware side-six search first found a natural Superko trigger. A later deterministic search targeted its frozen rule state with a 25,000-state and depth-20 ceiling; it found a natural paired history after 8 examined states and 69 transitions. Independent Python and Web replay verifies the exact mask-free projection, distinct history sets, and the single-action legal-set difference. An earlier 5,000-pair, 12,656-shared-action continuation miss remains a budgeted historical result, not an absence proof.

7.2 Within-size self-play

The frozen D14–D16 formal ledger contains 15 training and 315 evaluation tasks: 1,500 self-play games, 3,000 updates, and 30,600 task-indexed replay-verified game records, with no failure or truncation. All 45 final training-seed scores against Random exceed 0.5 (Table 3). Against UCT-MCTS-16, cell medians span 0.477–0.920, with the widest seed ranges at side length 5. These are five-seed descriptive summaries, not inferential comparisons.

Table 3: Final-checkpoint seed-level score summaries on the three training sizes. Each cell is median [min, max] across five training-seed scores; each seed score summarizes 200 games (100 swapped-color pairs). Brackets are ranges, not confidence intervals. Score is $(W + 0.5D)/N$, not raw win rate; pooled W/D/L and score remain only in the receipt-bound audit for reconciliation.

Model	n	vs. Random	vs. UCT-MCTS-16
Grid-GNN	5	.828 [.807,.925]	.477 [.292,.777]
	7	.905 [.853,.920]	.655 [.530,.730]
	9	.963 [.897,.973]	.865 [.700,.935]
Padded-CNN	5	.882 [.782,.950]	.555 [.345,.650]
	7	.945 [.905,.975]	.700 [.625,.785]
	9	.980 [.960,.990]	.920 [.875,.943]
Topology-GNN	5	.895 [.733,.907]	.677 [.343,.782]
	7	.902 [.853,.963]	.715 [.652,.762]
	9	.948 [.938,.968]	.868 [.835,.915]

Five checkpoint probes show non-monotone, size-dependent trajectories. Because no area-under-curve or fixed-strength estimator was preregistered, they do not establish relative sample efficiency.

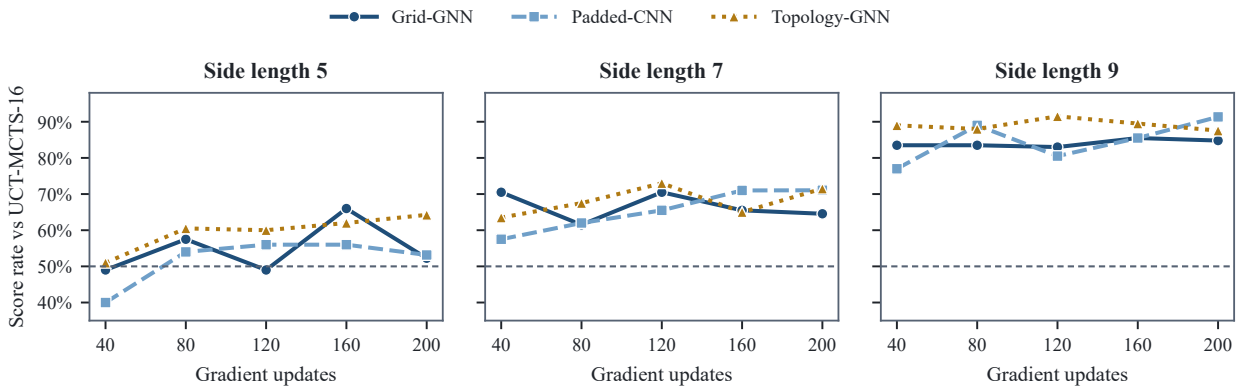


Figure 2: Frozen pooled score-rate probes against UCT-MCTS-16 from `arena_learning_curve.csv`, retained only as a schedule and reconciliation visualization. The vertical scale is focused on 0.35–0.98. Steps 40–160 pool 100 game records per point, whereas step 200 pools 1,000; the receipt-bound audit reports the corresponding five-seed medians, ranges, and pair-score distributions. The probes support neither uncertainty, continuous-convergence, nor relative sample-efficiency inference.

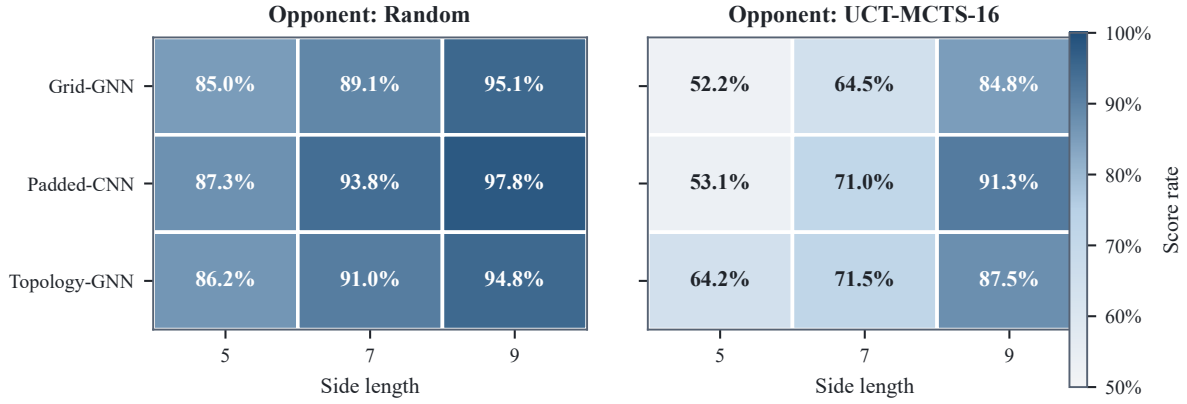


Figure 3: Pooled reconciliation heatmap from `final_vs_search.csv`; each cell aggregates 1,000 game records from five training-seed receipts. Table 3 gives the primary five-seed median and range. Score is $(W + 0.5D)/N$, not raw win rate. Colors do not encode uncertainty, multiplicity-adjusted significance, or unseen-size generalization.

7.3 Representation round robin

Direct play exhibits heterogeneous seed-level outcomes (Table 4). Only Topology-GNN versus Grid-GNN at side length 7 has a seed-score median of 1.00; the other eight model-pair–size medians are 0.50, with wide ranges. No global ordering is supported.

Table 4: Seed-level score summaries from A's perspective in `representation_round_robin.csv`. Each cell is median [min, max] across five training-seed tasks. Every 200-game task contains two deterministic color-conditioned outcomes, each repeated 100 times; ranges are descriptive and no global ranking is inferred.

A vs. B	$n = 5$	$n = 7$	$n = 9$
Topology-GNN vs. Grid-GNN	.50 [.50,1.00]	1.00 [.50,1.00]	.50 [.50,1.00]
Padded-CNN vs. Grid-GNN	.50 [.00,1.00]	.50 [.00,1.00]	.50 [.00,.50]
Padded-CNN vs. Topology-GNN	.50 [.00,1.00]	.50 [.00,.50]	.50 [.00,1.00]

Across all 9,000 round-robin games, each 200-game task contains exactly two unique color-conditioned trajectories. Each aggregate therefore represents five training seeds and ten unique trajectories, not 1,000 independent trials.

7.4 Ablations

`enforce` rejects repetitions, whereas `observe` admits them while retaining history. In a 2,000-pair fixed-policy pilot at each of sizes 6 and 7, only two size-7 games triggered Superko and one trajectory diverged; all winners agreed, no game truncated, and mean length changed by -0.01017%.

All internal fixed gates for score (± 5 percentage points), relative length ($\pm 5\%$), and truncation passed for this policy, size set, and horizon. This supports "empirically similar under the sampled policy," not rule equivalence: only one handcrafted policy was evaluated.

A preregistered five-seed extension covered six policies, two sizes, 120 matched pairs, and 240 replay-verified games. It observed no trigger or outcome effect, but every practical-similarity gate failed: each cell had only ten `observe` games, so $0/10$ has a 27.75% Wilson upper bound, above the 1% threshold. CycleSeeking's null result is a bounded search miss, and its neural row is a one-game, one-update smoke checkpoint.

7.5 Compute and reproducibility

Runs used Python 3.10.20, PyTorch 2.7.1+cu118, deterministic CUDA 11.8, and an RTX 4060 Laptop GPU. Mean per-seed training time was 489.8 s for Padded-CNN, 399.2 s for Grid-GNN, and 440.0 s for Topology-GNN (1.85 aggregate training GPU-hours); evaluation compute is not yet consolidated. One canonical manifest digest (`1bbf2c9a9ecc...`) binds all 330 receipts. Independent aggregation rechecked task identity, budgets, hashes, summaries, and all 30,600 task-indexed replay-verified game records; for this completed D14–D16 bundle, `formal_ready=true` denotes artifact completeness, not superiority.

8 Limitations and Broader Impact

- The side-six paired-history witness is equal only under a mask-free Topology projection. Its implemented legal masks differ, so it is not an identical-observation-and-mask decision witness and does not establish a learned representation benefit.
- Results cover jointly trained sizes 5, 7, and 9, not zero-shot sizes 10 or 12; history, logical-edge, cascade, and search-budget ablations remain.
- Grid-GNN and Topology-GNN differ in typed relations and hidden width, so their comparison mixes representation and architecture; the CNN adds a model family confound. Parameters and data are matched, but FLOPs, memory, transitions, and wall time are not.
- The primary replication count is five training seeds per cell. Each D16 200-game seed-task contains only two unique color-conditioned trajectories, each repeated 100 times. Seed medians, ranges, and pair-score histograms are descriptive and provide no confidence interval or hypothesis test. A later preregistered diversified extension executed all planned games but failed its frozen trajectory-diversity gate and is therefore excluded here. A prospectively redesigned evaluation and independent verification remain required.
- LIFELINE is one hand-designed game, so external validity to other games is untested; its Superko matrix is finite-policy evidence. The smoke neural condition and incomplete evaluation-compute accounting preclude broader efficiency claims.

9 Conclusion

LIFELINE provides an auditable setting for separating rule state from the learning interface in self-play. The side-five enumeration is a useful negative control: latent logical-edge differences do not automatically imply a legal-action, value, or optimal-action difference. The side-six witness shows a complementary failure mode: a deliberately weakened, mask-free projection can hide a history-dependent legality difference, even though the implemented legal masks reveal it to the agent. Neither result establishes a learned representation benefit.

The frozen baseline audit is intentionally modest. All 45 final seed scores against Random exceed 0.5 on seen sizes, but UCT-MCTS-16 medians vary by model and size, and duplicated trajectories rule out a global ranking. The resulting resource is a benchmark and diagnostic protocol, not a claim that typed logical edges or compact history are universally useful. The next empirical step is a preregistered same-backbone factorial ablation with diversified openings, independent verification, and explicitly held-out sizes; until that evidence exists, stronger causal and cross-game conclusions remain open.

Reproducibility statement

Sections 5–7 and Appendix A specify the frozen protocol, model budgets, statistics, and result boundaries. The accompanying claim ledger maps each paper claim to compact aggregate CSV/JSON, append-only receipt-ledger JSONL, and independent verifier outputs. Checkpoints, raw per-game logs, and local task directories are not claimed as submission artifacts.

References

[1] David Abel, D. Ellis Hershkowitz, and Michael L. Littman. Near optimal behavior via approximate state abstraction. *arXiv preprint arXiv:1701.04113*, 2017. doi: 10.48550/arXiv.1701.04113.

[2] Thomas Anthony, Zheng Tian, and David Barber. Thinking fast and slow with deep learning and tree search. *arXiv preprint arXiv:1705.08439*, 2017. doi: 10.48550/arXiv.1705.08439.

[3] Peter W. Battaglia, Jessica B. Hamrick, Victor Bapst, Alvaro Sanchez-Gonzalez, Vinicius Zambaldi, Mateusz Malinowski, et al. Relational inductive biases, deep learning, and graph networks. *arXiv preprint arXiv:1806.01261*, 2018. doi: 10.48550/arXiv.1806.01261.

[4] Shai Ben-Assayag and Ran El-Yaniv. Train on small, play the large: Scaling up board games with AlphaZero and GNN. *arXiv preprint arXiv:2107.08387*, 2021. doi: 10.48550/arXiv.2107.08387. URL https://arxiv.org/abs/2107.08387.

[5] Cameron B. Browne, Edward Powley, Daniel Whitehouse, Simon M. Lucas, Peter I. Cowling, Philipp Rohlfshagen, et al. A survey of Monte Carlo tree search methods. *IEEE Transactions on Computational Intelligence and AI in Games*, 4(1):1–43, 2012. doi: 10.1109/TCIAIG.2012.2186810.

[6] Murray Campbell. The graph-history interaction. In *Proceedings of the 1985 ACM Annual Conference on The Range of Computing: Mid-80's Perspective*, pages 278–280. ACM, 1985. doi: 10.1145/320435.320516. URL https://doi.org/10.1145/320435.320516.

[7] Tristan Cazenave, Yen-Chi Chen, Guan-Wei Chen, Shi-Yu Chen, Xian-Dong Chiu, Julien Dehos, Maria Elsa, Qucheng Gong, Hengyuan Hu, Vasil Khalidov, Cheng-Ling Li, Hsin-I Lin, Yu-Jin Lin, Xavier Martinet, Vegard Mella, Jérémy Rapin, Baptiste Rozière, Gabriel Synnaeve, Fabien Teytaud, Olivier Teytaud, Shi-Cheng Ye, Yi-Jun Ye, Shi-Jim Yen, and Sergey Zagoruyko. Polygames: Improved zero learning. *ICGA Journal*, 42(4):244–256, 2021. doi: 10.3233/ICG-200157. URL https://doi.org/10.3233/ICG-200157.

[8] Lonnie Chrisman. Reinforcement learning with perceptual aliasing: The perceptual distinctions approach. In *Proceedings of the Tenth National Conference on Artificial Intelligence*, pages 183–188. AAAI Press, 1992. URL https://dblp.org/rec/conf/aaai/Chrisman92.

[9] Chao Gao, Siqi Yan, Ryan Hayward, and Martin Müller. A transferable neural network for Hex. *ICGA Journal*, 40(3): 224–233, 2019. doi: 10.3233/ICG-180055. URL https://doi.org/10.3233/ICG-180055.

[10] Justin Gilmer, Samuel S. Schoenholz, Patrick F. Riley, Oriol Vinyals, and George E. Dahl. Neural message passing for quantum chemistry. *arXiv preprint arXiv:1704.01212*, 2017. doi: 10.48550/arXiv.1704.01212.

[11] Robert Givan, Thomas Dean, and Matthew Greig. Equivalence notions and model minimization in markov decision processes. *Artificial Intelligence*, 147(1–2):163–223, 2003. doi: 10.1016/S0004-3702(02)00376-4.

[12] William L. Hamilton, Rex Ying, and Jure Leskovec. Inductive representation learning on large graphs. *arXiv preprint arXiv:1706.02216*, 2017. doi: 10.48550/arXiv.1706.02216.

[13] Shengyi Huang and Santiago Ontañón. A closer look at invalid action masking in policy gradient algorithms. *The International FLAIRS Conference Proceedings*, 35, 2022. doi: 10.32473/flairs.v35i.130584.

[14] Jiechuan Jiang, Chen Dun, Tiejun Huang, and Zongqing Lu. Graph convolutional reinforcement learning. *arXiv preprint arXiv:1810.09202*, 2018. doi: 10.48550/arXiv.1810.09202.

[15] Chaitanya K. Joshi, Quentin Cappart, Louis-Martin Rousseau, and Thomas Laurent. Learning the travelling salesperson problem requires rethinking generalization. *arXiv preprint arXiv:2006.07054*, 2020. doi: 10.48550/arXiv.2006.07054.

[16] Leslie Pack Kaelbling, Michael L. Littman, and Anthony R. Cassandra. Planning and acting in partially observable stochastic domains. *Artificial Intelligence*, 101(1–2):99–134, 1998. doi: 10.1016/S0004-3702(98)00023-X.

[17] Yannik Keller, Jannis Blüml, Gopika Sudhakaran, and Kristian Kersting. From images to connections: Can DQN with GNNs learn the strategic game of Hex? *arXiv preprint arXiv:2311.13414*, 2023. doi: 10.48550/arXiv.2311.13414. URL https://arxiv.org/abs/2311.13414.

[18] Akihiro Kishimoto and Martin Müller. A general solution to the graph history interaction problem. In *Proceedings of the Nineteenth National Conference on Artificial Intelligence*, pages 644–649. AAAI Press, 2004. URL https://dblp.org/rec/conf/aaai/KishimotoM04.

[19] Jakub Kowalski, Maksymilian Mika, Jakub Sutowicz, and Marek Szykuła. Regular boardgames. *Proceedings of the AAAI Conference on Artificial Intelligence*, 33(01):1699–1706, 2019. doi: 10.1609/aaai.v33i01.33011699. URL https://doi.org/10.1609/aaai.v33i01.33011699.

[20] Jakub Kowalski, Radoslaw Miernik, Maksymilian Mika, Wojciech Pawlik, Jakub Sutowicz, Marek Szykula, and Andrzej Tkaczyk. Efficient reasoning in regular boardgames. In *2020 IEEE Conference on Games*, pages 455–462. IEEE, 2020. doi: 10.1109/CoG47356.2020.9231668. URL https://doi.org/10.1109/CoG47356.2020.9231668.

[21] Sotetsu Koyamada, Shinri Okano, Soichiro Nishimori, Yu Murata, Keigo Habara, Haruka Kita, and Shin Ishii. PGX: Hardware-accelerated parallel game simulators for reinforcement learning. *arXiv preprint arXiv:2303.17503*, 2023. doi: 10.48550/arXiv.2303.17503. URL https://arxiv.org/abs/2303.17503.

[22] Marc Lanctot, Edward Lockhart, Jean-Baptiste Lespiau, Vinicius Zambaldi, Satyaki Upadhyay, Julien Pérolat, et al. OpenSpiel: A framework for reinforcement learning in games. *arXiv preprint arXiv:1908.09453*, 2019. doi: 10.48550/arXiv.1908.09453.

[23] Éric Piette, Dennis J. N. J. Soemers, Matthew Stephenson, Chiara F. Sironi, Mark H. M. Winands, and Cameron Browne. Ludii – the ludemic general game system. In *ECAI 2020*, Frontiers in Artificial Intelligence and Applications, pages 411–418. IOS Press, 2020. doi: 10.3233/FAIA200120. URL https://doi.org/10.3233/FAIA200120.

[24] Tomas Rigaux and Hisashi Kashima. Enhancing chess reinforcement learning with graph representation. In *Advances in Neural Information Processing Systems 37*, pages 197–218. Neural Information Processing Systems Foundation, 2024. doi: 10.52202/079017-0006. URL https://doi.org/10.52202/079017-0006.

[25] Julian Schrittwieser, Ioannis Antonoglou, Thomas Hubert, Karen Simonyan, Laurent Sifre, Simon Schmitt, et al. Mastering Atari, Go, chess and shogi by planning with a learned model. *Nature*, 588(7839):604–609, 2020. doi: 10.1038/s41586-020-03051-4.

[26] David Silver, Julian Schrittwieser, Karen Simonyan, Ioannis Antonoglou, Aja Huang, Arthur Guez, et al. Mastering the game of Go without human knowledge. *Nature*, 550(7676):354–359, 2017. doi: 10.1038/nature24270.

[27] David Silver, Thomas Hubert, Julian Schrittwieser, Ioannis Antonoglou, Matthew Lai, Arthur Guez, et al. A general reinforcement learning algorithm that masters chess, shogi, and Go through self-play. *Science*, 362(6419):1140–1144, 2018. doi: 10.1126/science.aar6404.

[28] Dennis J. N. J. Soemers, Vegard Mella, Eric Piette, Matthew Stephenson, Cameron Browne, and Olivier Teytaud. Transfer of fully convolutional policy-value networks between games and game variants. *arXiv preprint arXiv:2102.12375*, 2021. doi: 10.48550/arXiv.2102.12375. URL https://arxiv.org/abs/2102.12375.

[29] J. K. Terry, Benjamin Black, Nathaniel Grammel, Mario Jayakumar, Ananth Hari, Ryan Sullivan, et al. PettingZoo: Gym for multi-agent reinforcement learning. *arXiv preprint arXiv:2009.14471*, 2020. doi: 10.48550/arXiv.2009.14471.

[30] Yuandong Tian, Jerry Ma, Qucheng Gong, Shubho Sengupta, Zhuoyuan Chen, James Pinkerton, and C. Lawrence Zitnick. ELF OpenGo: An analysis and open reimplementation of AlphaZero. *arXiv preprint arXiv:1902.04522*, 2019. doi: 10.48550/arXiv.1902.04522.

[31] John Tromp. The number of legal Go positions. In *Computers and Games*, Lecture Notes in Computer Science, pages 183–190. Springer International Publishing, 2016. doi: 10.1007/978-3-319-50935-8_17.

[32] John Tromp and Gunnar Farnebäck. Combinatorics of Go. In *Computers and Games*, Lecture Notes in Computer Science, pages 84–99. Springer Berlin Heidelberg, 2007. doi: 10.1007/978-3-540-75538-8_8.

[33] Kuang-che Wu, Shun-Chin Hsu, and Tsan-sheng Hsu. The graph-history interaction problem in chinese chess. In *Advances in Computer Games*, Lecture Notes in Computer Science, pages 165–179. Springer Berlin Heidelberg, 2006. doi: 10.1007/11922155_13. URL https://doi.org/10.1007/11922155_13.

[34] Keyulu Xu, Jingling Li, Mozhi Zhang, Simon S. Du, Ken ichi Kawarabayashi, and Stefanie Jegelka. What can neural networks reason about? *arXiv preprint arXiv:1905.13211*, 2019. doi: 10.48550/arXiv.1905.13211.

A Hyperparameters and Training Details

Table 5: Frozen formal settings from `D14_D16_EXPERIMENT_PROTOCOL.md`, shared by all three learned representations. They define the completed seen-size run, not an unseen-size or search-budget ablation.

Setting	Value
Training sizes / seeds	$\{5, 7, 9\}$ / 20260825–20260829
PUCT	16 simulations, $c_{\text{puct}} = 1.5$
Root noise	$\alpha = 0.3$, $\epsilon = 0.25$
Temperature	1.0 for 20 plies, then 0.1
Self-play / updates	100 complete games / 200 gradient steps
Replay / batch	10,000 / 16
Optimizer	AdamW, lr 10^{-3}, weight decay 10^{-4}
Gradient clipping	global norm 5.0
Checkpoints	steps 40, 80, 120, 160, 200
Terminal rule	256 plies; enforced Superko; no shaped reward
Final evaluation	200 games per seed and matchup
Color control	100 same-seed swapped-color pairs

Targets are the masked root-visit distribution and the terminal result from the stored player-to-act perspective. Absolute player payoffs are backed up through the search tree because automatic skips can leave the same player to act after a transition. Training loss is masked policy cross-entropy plus mean-squared terminal value error.

B Additional Results and Reproducibility

Canonical aggregates retain checkpoint, W/D/L, seed, loss, transition, and timing fields. In the completed D14–D16 bundle, no formal task failed or truncated; smoke runs and duplicate views of the step-200 UCT matchup are excluded from the 30,600 task-indexed replay-verified game records. The receipt-bound `d14_d16_seed_pair_descriptive_audit.json` reconstructs all 330 receipts and 15,300 color-swapped pairs into 315 seed-task rows and 72 five-seed summaries, matching all 72 canonical rows with zero mismatch. Its 45 D16 task profiles each bind two color-conditioned trajectory hashes with 100 repetitions apiece; all pair-score distributions remain descriptive. The paper's evidence mapping names frozen protocol/config hashes, compact aggregate CSV/JSON summaries, an append-only JSONL receipt ledger, and independent verifier outputs. It does not claim that checkpoints, raw per-game logs, or task directories are included in the submission artifacts. Aggregation rejects missing or duplicate tasks, identity or budget drift, truncation, color imbalance, and incomplete replay. Two interrupted runners lack independent canonical files for their first two attempts, so no per-attempt lineage is claimed.