

Oracle SQL Developer : XE

File Edit View Navigate Run Source Team Tools Window Help

Connections

- Oracle Connections
- XE
- Database Schema Service Connections

Reports

- All Reports
- About Your Database
- All Objects
- Analytic View Reports
- Application Express
- ASH and AWR
- Database Administration
- Data Dictionary
- Data Dictionary Reports
- Data Modeler Reports
- OLAP Reports
- PLSQL

Worksheet



```
CREATE TABLE Customers (  
  CustomerID NUMBER PRIMARY KEY,  
  CustomerName VARCHAR2(50),  
  Age NUMBER,  
  Balance NUMBER,  
  IsVIP VARCHAR2(5)  
);  
  
CREATE TABLE Loans (  
  LoanID NUMBER PRIMARY KEY,  
  CustomerID NUMBER,  
  InterestRate NUMBER,  
  DueDate DATE,  
  FOREIGN KEY (CustomerID) REFERENCES Customers(CustomerID)  
);
```

Script Output x Query Result x


SQL | All Rows Fetched: 3 in 0.005 seconds

CUSTOMERID	CUSTOMERNAME	AGE	BALANCE	ISVIP
1	1 Haritha	65	15000	FALSE
2	2 Rahul	45	9000	FALSE
3	3 Anjali	70	20000	FALSE

Line 25 Column 25 | Insert | Modified | Windows: C

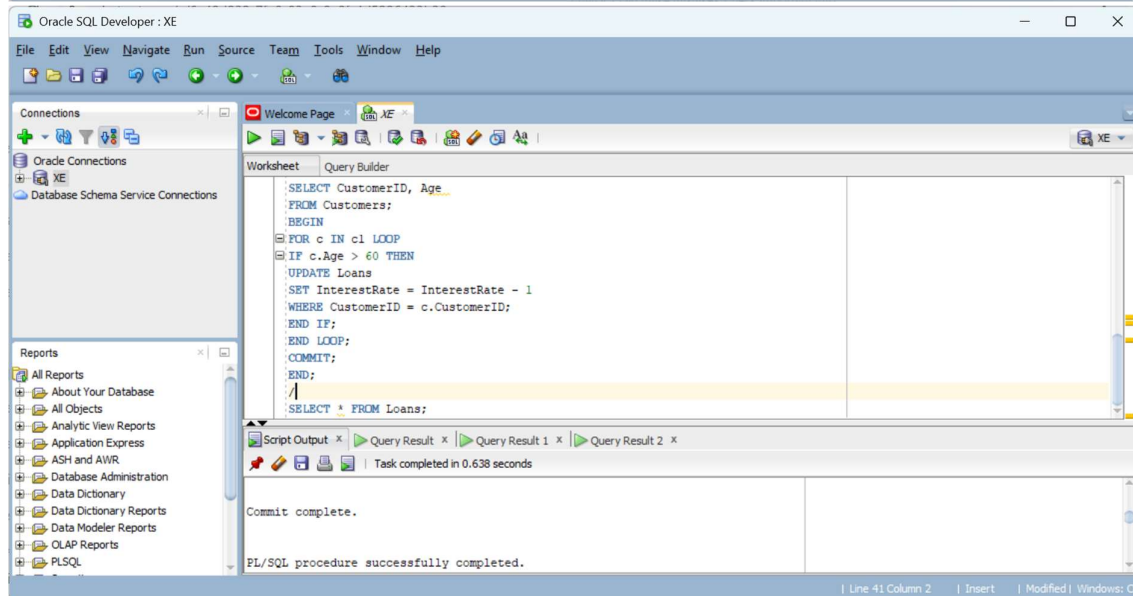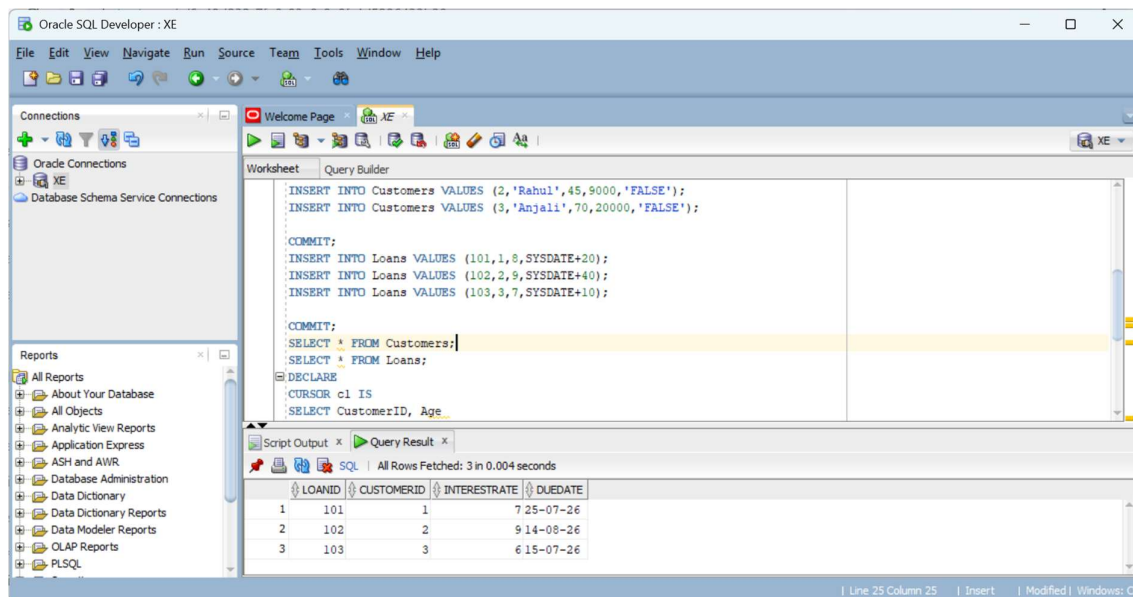

Scenario2

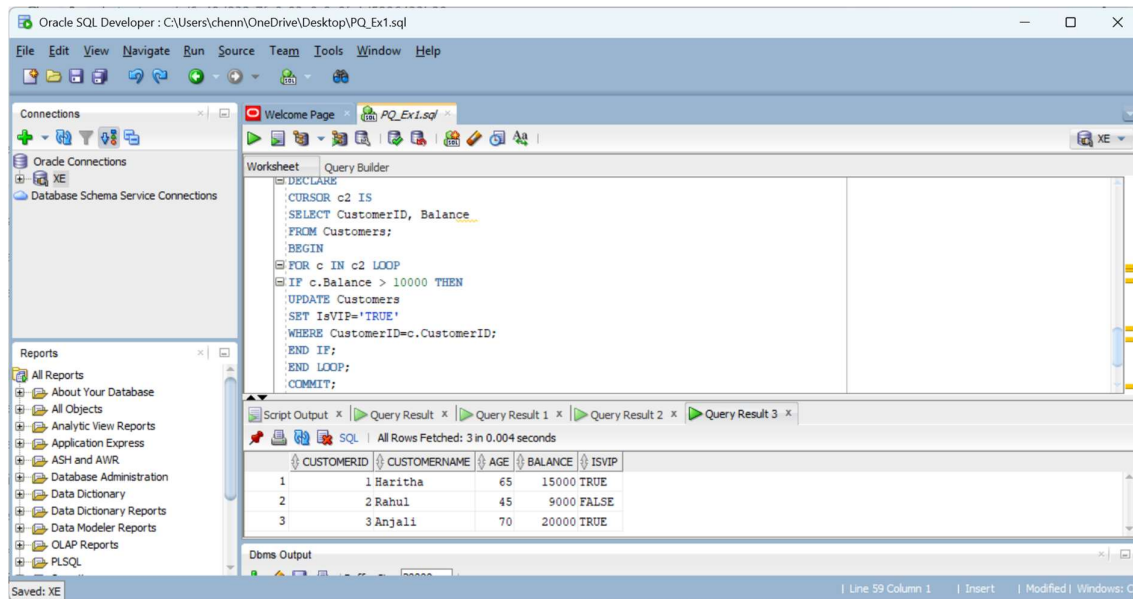

Scenario 3

