


Name:C.Haritha

Reg.No:23BEC7347

Superset ID: 8008209

Spring rest handson

Create a Spring Web Project using Maven

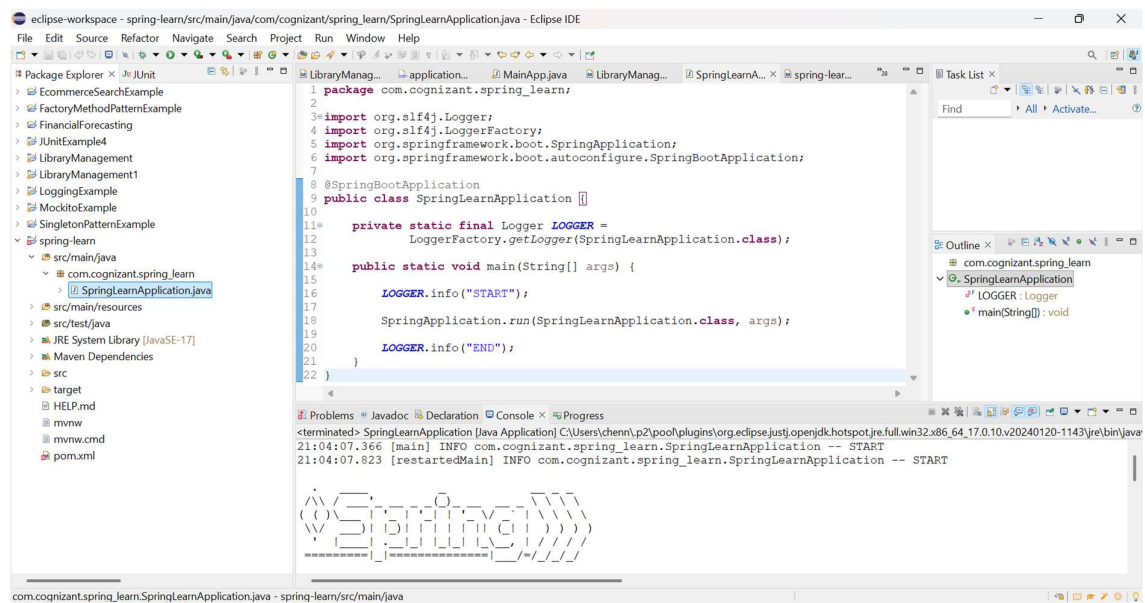


The screenshot displays the Eclipse IDE interface. The Package Explorer on the left shows the project structure, including the package `com.cognizant.spring_learn` and the file `SpringLearnApplication.java`. The main editor shows the source code of `SpringLearnApplication`, which is a Spring Boot application. The code includes imports for `org.slf4j.Logger`, `org.slf4j.LoggerFactory`, `org.springframework.boot.SpringApplication`, and `org.springframework.boot.autoconfigure.SpringBootApplication`. The `main` method logs "START" and "END" messages. The Console at the bottom shows the output of the application, indicating that it has started successfully. The status bar at the bottom shows the file path: `com.cognizant.spring_learn.SpringLearnApplication.java - spring_learn/src/main/java`.

```
1 package com.cognizant.spring_learn;
2
3 import org.slf4j.Logger;
4 import org.slf4j.LoggerFactory;
5 import org.springframework.boot.SpringApplication;
6 import org.springframework.boot.autoconfigure.SpringBootApplication;
7
8 @SpringBootApplication
9 public class SpringLearnApplication {
10
11     private static final Logger LOGGER =
12         LoggerFactory.getLogger(SpringLearnApplication.class);
13
14     public static void main(String[] args) {
15
16         LOGGER.info("START");
17
18         SpringApplication.run(SpringLearnApplication.class, args);
19
20         LOGGER.info("END");
21     }
22 }
```

21:04:07.366 [main] INFO com.cognizant.spring_learn.SpringLearnApplication -- START
21:04:07.823 [restartedMain] INFO com.cognizant.spring_learn.SpringLearnApplication -- START

Spring Core – Load Country from Spring Configuration XML

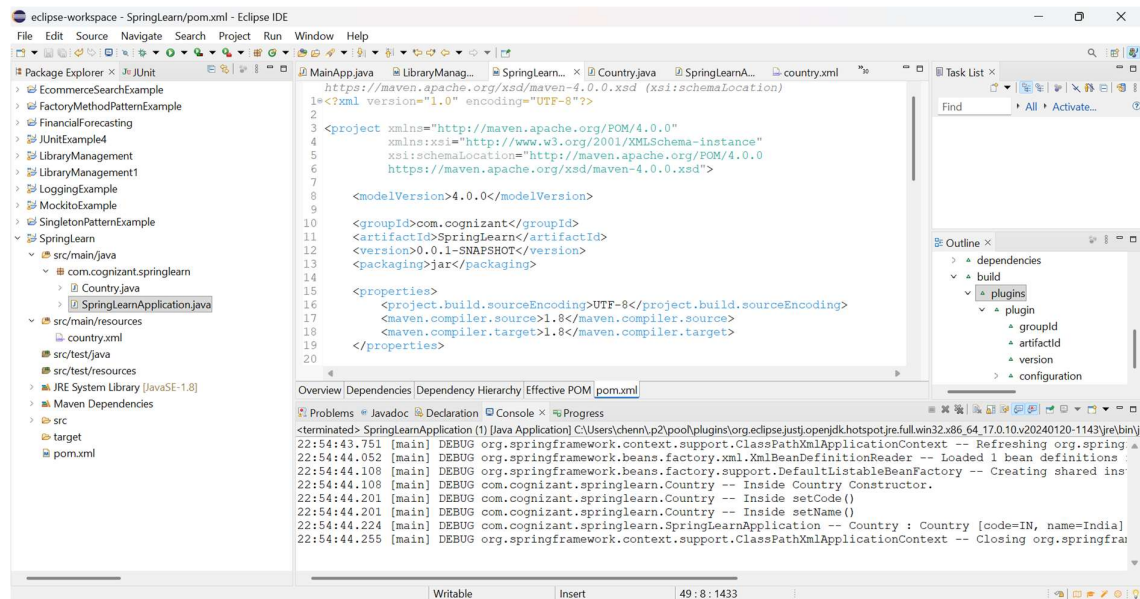

Code for class country.java

```
package com.cognizant.springlearn;
```

```
import org.slf4j.Logger;
```

```
import org.slf4j.LoggerFactory;
```

```
public class Country {
```

```
    private static final Logger LOGGER = LoggerFactory.getLogger(Country.class);
```

```
    private String code;
```

```
    private String name;
```

```
    public Country() {
```

```
        LOGGER.debug("Inside Country Constructor.");
```

```
    }
```

```
    public String getCode() {
```

```
        LOGGER.debug("Inside getCode());
```

```

        return code;
    }

    public void setCode(String code) {
        LOGGER.debug("Inside setCode()");
        this.code = code;
    }

    public String getName() {
        LOGGER.debug("Inside getName()");
        return name;
    }

    public void setName(String name) {
        LOGGER.debug("Inside setName()");
        this.name = name;
    }

    @Override
    public String toString() {
        return "Country [code=" + getCode() + ", name=" + getName() + "];"
    }
}

```

Code for SpringLearnApplication.java

```

package com.cognizant.springlearn;

import org.slf4j.Logger;

import org.slf4j.LoggerFactory;

import org.springframework.context.ApplicationContext;

import org.springframework.context.support.ClassPathXmlApplicationContext;

public class SpringLearnApplication {

```

```

    private static final Logger
LOGGER=LoggerFactory.getLogger(SpringLearnApplication.class);

    public static void displayCountry() {

        ApplicationContext context = new ClassPathXmlApplicationContext("country.xml");

        Country country = context.getBean("country", Country.class);

        LOGGER.debug("Country : {}", country);

        ((ClassPathXmlApplicationContext) context).close();

    }

    public static void main(String[] args) {

        displayCountry();

    }

}

```

