DRAWING NOT TO BE SCALED,IF IN DOUBT , ASK.

ALL DIMENSIONS ARE IN MILIMETRES UNLESS OTHERWISE STATED.

M8x1.25P BOLT REAR SPROCKET

PRODUCT SIZE M8x1.25P	MINIMUM LENGTH	MAXIMUM LENGTH
33.50(L)	33.00	34.00

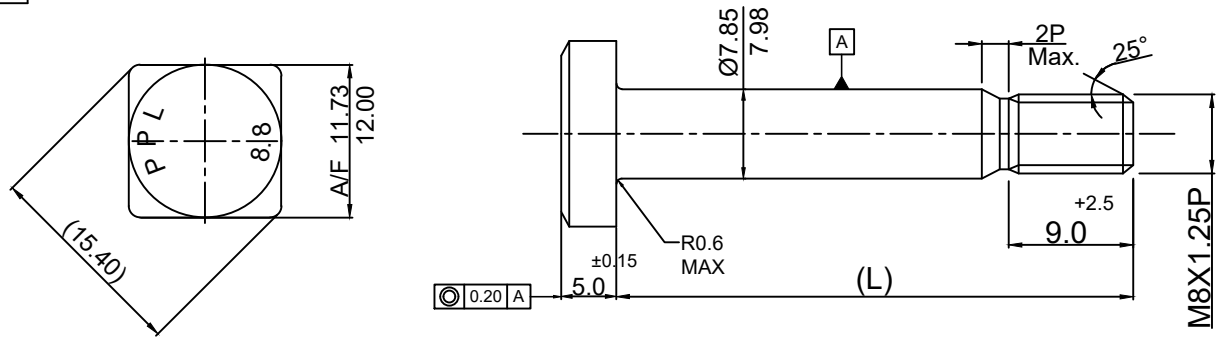

HEAT TREATMENT DETAILS	
GRADE	HARDNESS (HRC)
	SPEC.
8.8	22-32

NOTES :-

1) GRADE :REFER TABLE , HARDNESS : REFER TABLE
2) SURFACE FINISH : Zn PLATING,TRIVALENT PASSIVATION COLOUR BLUE AS PER TSES 755
3) NO WHITE RUST WITH IN 96 HRS,NO RED RUST WITH IN 250 HRS
4) PRODUCT SHOULD BE FREE FROM FORGING CRACKS,FORGING BURST, SHEARING BURST,LAPS,VOIDS,FOLDS,TOOL MARKS,QUENCH CRACK,SLUDGE,RUST,DENT & DAMAGES.

M8x1.25P - 6h GO GAUGE
- 6h NO GO GAUGE

● CRITICAL CHARACTERISTIC CC SIGNIFICANT CHARACTERISTIC SC

CC

THREAD DETAILS		
	MINIMUM	MAXIMUM
MAJOR (Ø)	7.788	8.000
PCD (Ø)	7.070	7.188
MINOR (Ø)	6.300	6.647

PROJECTION



MATERIAL	10B21/15B25	DRAWN BY	B.N
HEAT TREATMENT	REFER TABLE	CHECKED BY	P.P.N
SURFACE FINISH	REFER NOTES	APPROVED BY	G.C.D

REV. NO.	DATE	DEATAILS	INITIAL
00	03.09.2024	NEW RELEASE	

MACHINE NAME :- CBF 84S

CUSTOMER CODE :- W327

PC FILE NAME :- E008033402

PreciFast iPPL

PRECIFAST PRIVATE LIMITED
KURNOOL , (A.P)

DESCRIPTION:- M8X1.25X33.5 BOLT REAR SPROCKET

CUTOMER DWG NO:- 0331318L

PART CODE:- FL-E008033402

THIS DRAWING & DESIGN IS THE PROPERTY OF PRECIFAST PVT LTD AND MUST NOT BE COPIED OR LENT WITHOUT PRIOR PERMISSION IN WRITING.

FORMAT NO : FT/DES/06