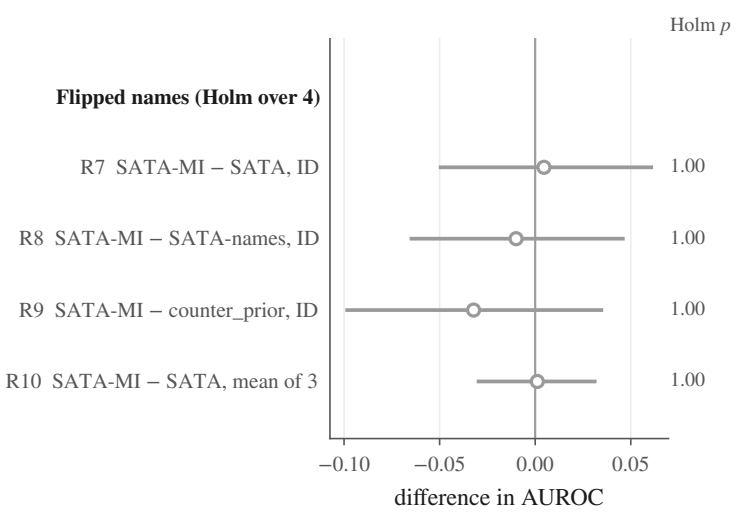
Holm p
Flipped names (Holm over 4)
R7 SATA-MI − SATA, ID
1.00
R8 SATA-MI − SATA-names, ID
1.00
R9 SATA-MI − counter_prior, ID
1.00
R10 SATA-MI − SATA, mean of 3
1.00
−0.10
−0.05
0.00
0.05
difference in AUROC

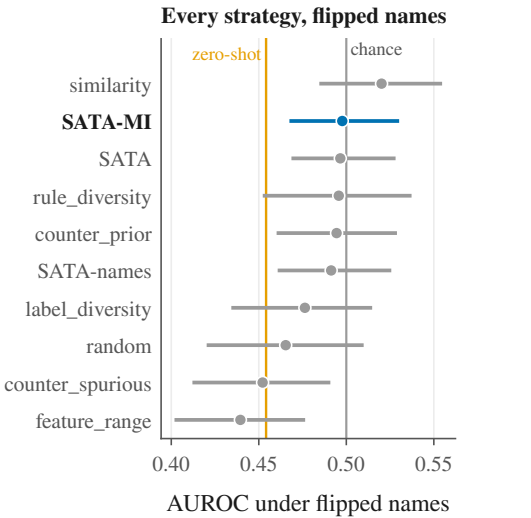
Every strategy, flipped names
zero-shot
chance
similarity
SATA-MI
SATA
rule_diversity
counter_prior
SATA-names
label_diversity
random
counter_spurious
feature_range
0.40
0.45
0.50
0.55
AUROC under flipped names
(mean of 3 environments, 95% CI over tasks)