

AIOPSLAB: A HOLISTIC FRAMEWORK TO EVALUATE AI AGENTS FOR ENABLING AUTONOMOUS CLOUDS

Yinfang Chen¹ Manish Shetty² Gagan Somashekar³ Minghua Ma³ Yogesh Simmhan⁴ Jonathan Mace³
Chetan Bansal³ Rujia Wang³ Saravan Rajmohan³

ABSTRACT

AI for IT Operations (AIOps) aims to automate complex operational tasks, such as fault localization and root cause analysis, to reduce human workload and minimize customer impact. While traditional DevOps tools and AIOps algorithms often focus on addressing isolated operational tasks, recent advances in Large Language Models (LLMs) and AI agents are revolutionizing AIOps by enabling end-to-end and multitask automation. This paper envisions a future where AI agents autonomously manage operational tasks throughout the entire incident lifecycle, leading to self-healing cloud systems, a paradigm we term *AgentOps*. Realizing this vision requires a comprehensive framework to guide the design, development, and evaluation of these agents. To this end, we present AIOPSLAB, a framework that not only deploys microservice cloud environments, injects faults, generates workloads, and exports telemetry data but also orchestrates these components and provides interfaces for interacting with and evaluating agents. We discuss the key requirements for such a holistic framework and demonstrate how AIOPSLAB can facilitate the evaluation of next-generation AIOps agents. Through evaluations of state-of-the-art LLM agents within the benchmark created by AIOPSLAB, we provide insights into their capabilities and limitations in handling complex operational tasks in cloud environments.

1 INTRODUCTION

The rapid evolution of IT applications and services has led enterprises to increasingly depend on hyper-scale, cloud-based systems. These systems are often distributed, employing architectures such as microservices and serverless computing, enabling scalability but also adding complexity and introducing new operational challenges. In such cloud environments, issues can cascade into large-scale outages. For instance, an Amazon outage can result in losses of \$100 million in just one hour (Wolfe, 2018).

To address the challenges of managing incidents in such complex infrastructures, there is a movement towards the adoption of AIOps (Artificial Intelligence for IT Operations), within the context of DevOps (Development and Operations). The ultimate goal of AIOps is to create autonomous self-healing clouds, where AI-driven approaches can detect, localize, and mitigate faults with minimal human intervention. Although such a concept has existed for over a decade (Li et al., 2012; Dai et al., 2009), the recent advancements of AIOps and Large Language Model (LLM) agents have brought this vision closer to reality (Zhao et al.,

2023; He et al., 2022; Ma et al., 2018; Zhang et al., 2018; Ganatra et al., 2023; Somashekar et al., 2024; Zhang et al., 2024a; Chen et al., 2024). Large Language Model (LLM) agents (Mialon et al., 2023; Schick et al., 2024) integrate external tools to dynamically interact with their environment (Wei et al., 2022a), enabling them to autonomously manage the entire incident lifecycle, as shown in Figure 1.

To realize this autonomous self-healing cloud vision, we propose a new paradigm called *AgentOps* (Agent for Operations). In this paradigm, agentic approaches are not limited to isolated operational tasks but are capable of seamlessly managing multiple, cross-layer tasks across the entire operational stack. AgentOps represents an evolution where autonomous agents can make real-time decisions and end-to-end actions to ensure system reliability. This aligns with recent advancements in AI, as highlighted by a post:

“State-of-the-art AI results are increasingly obtained by compound systems with multiple components, not just monolithic models ... compound AI systems will likely be the best way to maximize AI results in the future” – The Shift from Models to Compound AI Systems (Zaharia et al., 2024)

AI-driven tools and benchmarks like WebArena (Zhou et al., 2023), R2E (Jain et al., 2024b), HumanEval (Chen et al., 2021), LiveCodeBench (Jain et al., 2024a), and SWE-bench (Jimenez et al., 2024) have significantly advanced the

¹UIUC, Champaign, USA ²UC Berkeley, Berkeley, USA

³Microsoft, Redmond, USA ⁴IISc, Bengaluru, India. Correspondence to: Minghua Ma <minghuama@microsoft.com>.

‘Dev’ side of DevOps by accelerating software development. However, progress in AI for ‘Ops’, particularly AgentOps, remains limited, due to the lack of high-quality benchmarks for diverse, realistic scenarios. Addressing this gap requires *a framework that aids the design, development, and evaluation of AIOps agents* within an interactive environment, a key contribution of this paper.

Challenges and contributions. Building a holistic benchmark framework that can allow agents to interact dynamically with the cloud poses several challenges. The first challenge is to manage an evaluation flow that is generally applicable to diverse agents and clouds, powerful enough to evaluate agents by complex and realistic operational tasks, and valuable enough to provide different feedback or observability, together with extensibility that make it possible to accommodate new tasks and agents by the users. While existing tools address individual components of the AIOps evaluation, such as observability (He et al., 2023; Simonsson et al., 2021), application suites (Gan et al., 2019; Zhou et al., 2021; Sriraman and Wenisch, 2018) and chaos engineering (Netflix, 2011; ChaosBlade Team, 2019; ChaosMesh Authors, 2022), they lack the integration necessary to support a unified AIOps evaluation.

We present **AIOpsLAB**, a holistic framework that can automatically manage the entire end-to-end evaluation process for AIOps solutions. This involves deploying services, fault injection, workload generation, orchestrating the agent-cloud interaction, and analyzing results. Specifically, AIOpsLAB features the *Agent-Cloud Interface (ACI)*, a unified interface that enables agents to interact with the cloud. ACI allows agents to communicate, take action, and receive feedback, orchestrating these interactions to detect and resolve issues in dynamic and interactive environments.

Moreover, a common challenge in operation benchmarks is the lack of realistic evaluation scenarios, as existing approaches often rely on static datasets, such as system metrics (Han et al., 2022; Jacob et al., 2020) that are typically time series data, or on fixed question-answer format (Liu et al., 2023). Such setups do not capture the dynamic, unpredictable, and evolving nature of real-world cloud environments, where workloads and incidents fluctuate over time. To make matters worse, recent efforts on AgentOps (Wang et al., 2023; Zhang et al., 2024a) use proprietary services and datasets. Furthermore, existing AIOps approaches and their benchmarks often focus only on isolated aspects of the incident lifecycle, such as anomaly detection (Yu et al., 2024b) or fault localization (Sun et al., 2024). This lacks a cohesive framework to evaluate AIOps agents comprehensively. Moreover, it limits support for decision-making that could assist in chaining algorithms or selecting the most suitable agent for a given operation scenario.

To address these limitations, we designed a set of evaluation

scenarios, referred to as *problems*, which replicates realistic incidents within the microservice system. AIOpsLAB’s problem pool is structured around a task-level taxonomy that categorizes tasks of different problems across the incident management lifecycle. Our approach ensures that evaluation scenarios go beyond simple performance or crash failures (that cannot be further analyzed or mitigated by the agents), incorporating fine-grained root causes to fully assess the diagnostic and mitigation abilities of AIOps agents.

Implementation. We developed AIOpsLAB, an innovative framework for building AgentOps benchmarks to evaluate LLM-based AIOps agents. AIOpsLAB utilizes two microservice applications from DeathStarBench (Gan et al., 2019) as testbeds, along with their workload generators. An extensible fault library, integrated with ChaosMesh (ChaosMesh Authors, 2022), enables diverse fault injections into the system. A telemetry observer, incorporating Prometheus (Prometheus Authors, 2024) for metrics, Jaeger (Jaeger Authors, 2024) for tracing, and Filebeat (Elasticsearch, 2024b) and Logstash (Elasticsearch, 2024a) for logging, supports on-disk storage of telemetry data, facilitating evaluations of both traditional AIOps algorithms and agentic solutions. We also integrate Helm and Kubernetes APIs into the AIOpsLAB’s orchestrator implementation.

To demonstrate the application of our framework in evaluating LLM-based agents as the benchmark, we use AIOpsLAB to create 48 problems as evaluation scenarios covering different types of AIOps tasks, and register four agents from different types on those problems. The agent registration is lightweight, with less than a hundred lines of code to implement. Our evaluation process reveals distinct challenges agents face across tasks.

Summary. This paper makes the following contributions:

- We unravel the requirements and challenges of achieving a holistic framework that supports the design, development, and evaluation of autonomous AIOps agents;
- We develop a framework, AIOpsLAB, which can not only deploy microservice cloud environments, inject faults, generate workloads, and export telemetry data but also orchestrate these components and provide agent-cloud interfaces for interacting with and evaluating agents.
- We leverage the AIOpsLAB framework to construct a benchmark suite with 48 problems across different AIOps tasks in an interactive environment and evaluate four LLM-based agents.
- We provide a detailed analysis of the agents’ performance and limitations by evaluating them on AIOpsLAB.
- We will make AIOpsLAB publicly available.¹

¹The link will be provided.

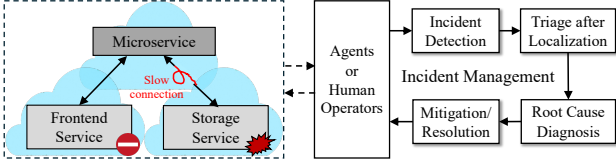


Figure 1. Microservice incident and its management lifecycle.

2 AIOPSLAB

In this section, we discuss the design and implementation of AIOPSLAB and its components, as illustrated in Figure 2.

2.1 Problem Definition

To support a wide range of evaluation scenarios (referred to as *problems*), which replicate realistic incidents within the microservice system, we first formalize an AIOps problem P as a tuple: $P = \langle T, C, S \rangle$, where T represents a *task*, C represents a *context*, and S represents the expected *solution* (oracle). The task T defines the specific AIOps operation to be performed, categorized into four types: detection, localization, (root cause) analysis, and mitigation. We define these tasks in Table 1. Each task type is associated with success criteria and evaluation metrics. For instance, the detection task employs Time-to-Detect (TTD) to measure the time taken to detect a fault.

The *context* C can be further formalized as a tuple: $C = \langle E, I \rangle$, where E is the *operational environment* in which the problem occurs, and I is the *problem information* used to describe the problem to the agent. The operational environment includes the cloud service, the fault model, and the workload model used to generate the problem, which is not shared with the agent. The problem information comprises of information such as service descriptions, task descriptions, and documentation about available APIs that is directly shared with the agent. It also subsumes indirect information (including logs, metrics, and traces observed in the operational environment) that is queryable by the agent at runtime. Finally, S is the expected outcome of the task, which is used to evaluate the agent’s performance. The solution is typically problem and task-specific and is carefully designed for evaluation. Note that some problems, e.g., mitigation tasks, can be solved in multiple ways. In such cases, AIOPSLAB evaluates the general state of the entire system, e.g., check whether all of the services are up and running, after the problem is resolved, rather than solely on the targeted resource where the fault was injected, because other services or resources may have been inadvertently affected during the mitigation process.

Example 2.1. Consider the problem of localizing a Kubernetes target port misconfiguration in a social network application. AIOPSLAB makes it easy to define this problem in just a few lines by extending the `LocalizationTask`

interface.

```
1 from aiopslab import LocalizationTask,
   SocialNetwork
2 from aiopslab import Wrk, VirtFaultInjector
3 class K8STargetPortMisconf(LocalizationTask):
4     def __init__(self):
5         self.app = SocialNetwork()
6         self.ans = "user-service"
7
8     def start_workload(self):
9         wrk = Wrk(rate=100, duration=10)
10        wrk.start_workload(url=self.app.
11            frontend_url)
12
13    def inject_fault(self):
14        inj = VirtFaultInjector(self.app.ans)
15        inj.inject([self.ans], "misconfig_k8s")
16
17    def eval(self, soln, trace, duration):
18        res["TTL"] = duration
19        res["success"] = is_exact_match(soln, self.
20            ans)
21        return res
```

Here, the task T is fault localization, and the solution S is the microservice named “user-service”, which is also the fault injection target. The context C includes the social network application, a misconfiguration fault from AIOPSLAB’s fault library, and a standard workload using the `wrk` tool. AIOPSLAB provides several such interfaces for all AIOps tasks (Section 2.4.1) and allows users to add new problems by extending them. Once problems are defined, AIOPSLAB can instantiate them and allow agents to interact with them using an Orchestrator that we describe next.

2.2 Orchestrator

AIOPSLAB’s Orchestrator strictly enforces the separation of concerns between the agent and the service, using a well-defined central piece, the Orchestrator. It provides a robust set of interfaces that allow seamless integration and extension of various system components.

2.2.1 Agent Cloud Interface

A key responsibility of the Orchestrator is to provide a well-defined interface for the agent to interact with the cloud environment. Typically, developers operate clouds and services with various programming (e.g., APIs, CLIs) and user interfaces (incident portals, dashboards, etc.). However, existing interfaces to the cloud are not well-designed for LLMs and agents. For instance, humans can reliably ignore irrelevant information, which can prove distracting for agents and hamper performance.

The ACI specifies (1) the set of valid actions available to the agent ⑦ ⑨, and (2) how the service’s state is conveyed back to the agent as the observation of its actions ⑧.

In doing so, the ACI abstracts the cloud environment’s complexity, simplifying the agent’s decision-making process. The ACI is designed to be intuitive and easy to use, with a concise list of APIs, each documented to ensure

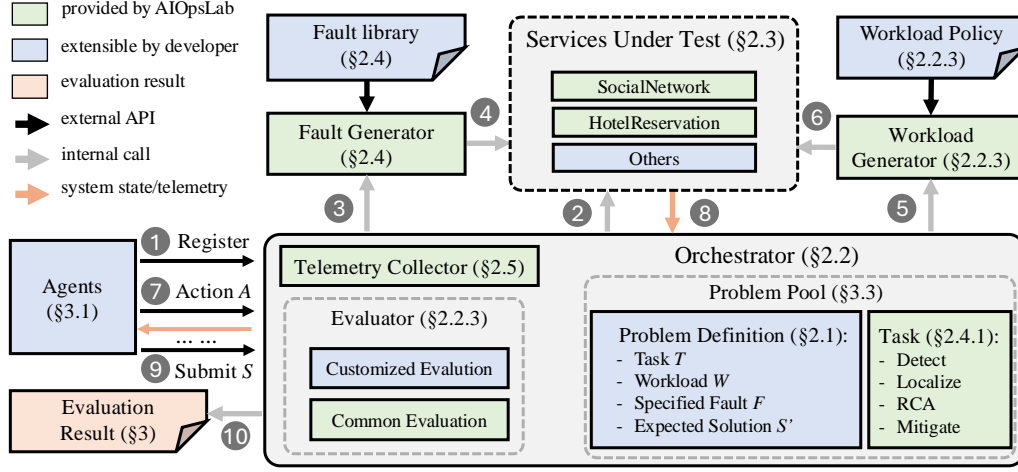


Figure 2. Overview of AIOpsLab. The Orchestrator coordinates interactions between various system components and serves as the Agent-Cloud-Interface (ACI). Agents engage with the Orchestrator to solve tasks, receiving a problem description, instructions, and relevant APIs. The Orchestrator generates diverse problems using the Workload and Fault Generators, injecting these into applications it can deploy. The deployed service has observability, providing telemetry such as metrics, traces, and logs. Agents act via the Orchestrator, which executes them and updates the service’s state. The Orchestrator evaluates the final solution using predefined metrics for the task.

that agents can make meaningful progress towards their objectives. Some APIs that AIOpsLab provides by default include `get_logs` (fetch logs), `get_metrics` (fetch metrics), `get_traces` (fetch traces), and `exec_shell` (execute shell commands after applying security policy filters).

Example 2.2. This example illustrates how the ACI is defined in AIOpsLab as APIs that agents can use.

```

1 class TaskActions:
2     def get_traces(ns: str, duration: int = 5) ->
3         str:
4             """
5             Collects trace data of the services from
6             Jaeger.
7             Args:
8                 ns (str): The K8S namespace.
9                 duration (int): Duration to collect
10                    traces.
11             Returns:
12                 str: Path to the directory where traces
13                    saved.
14             """
15     trace_api = TraceAPI(ns)
16     end_t = datetime.now()
17     start_t = end_t - timedelta(duration)
18     traces = trace_api.extract_traces(start_t,
19                                     end_t)
20     return trace_api.save_traces(traces)
    
```

As shown, the ACI encapsulates complex operations behind simple APIs like `get_traces`. On initializing a problem, the Orchestrator automatically extracts documentation from these APIs to provide as *context C* to the agent. At runtime, agents can specify a wide range of actions on the service (e.g., scaling, redeploying, patching) by way of the Orchestrator’s privileged access. Finally, the Orchestrator conveys the service’s state after each action with high-quality feedback to the agent, including outputs, error messages, and tracebacks.

2.2.2 Session Interface

Another key responsibility of the Orchestrator is to manage the lifecycle of the agent and the service. We implement the Orchestrator as a session-based system, where a *Session* is created for each instance of an agent solving a problem. Agents are registered with the Orchestrator, and a session starts with simple API calls passing a unique problem identifier ①. AIOpsLab’s design is highly flexible and integrates with the growing LLM and agent framework space. Our only requirement is that the agent must implement a `get_action` method with the following signature: `async def get_action(state: str) -> str`. It takes the service’s state as input from the Orchestrator and returns the next action the agent wants to take. Note that this could be a simple wrapper function around any existing agent framework.

Example 2.3. In this simplified example, we illustrate how an Agent can be onboarded to AIOpsLab.

```

1 from aiopslab import Orchestrator
2 class Agent:
3     def __init__(self, prob, instructs, apis):
4         self.prompt = self.set_prompt(prob,
5                                       instructs, apis)
6         self.llm = GPT4()
7
8     async def get_action(self, state: str) -> str:
9         return self.llm.generate(self.prompt +
10                                state)
11
12 #initialize the orchestrator
13 orch = Orchestrator()
14 pid = "misconfig_app_hotel_res-mitigation-1"
15 prob_desc, instructs, apis = orch.init_problem(pid)
16 #register and evaluate the agent
17 agent = Agent(prob_desc, instructs, apis)
18 orch.register_agent(agent, name="myAgent")
19 asyncio.run(orch.start_problem(max_steps=10))
    
```

As shown on initializing a problem, the Orchestrator shares *context* necessary for the agent to solve the problem. It then

polls (via `get_action`) for the agent’s next action.

2.2.3 Other Interfaces

Problem Initializers. As described in Section 2.1, each problem is defined with a *context* C which includes its operational environment. This environment is the service, fault, and workload conditions under which the problem occurs. Here, the Orchestrator deploys services and uses infrastructure-as-code tools like (Helm, 2024) to deploy the required cloud service for each problem. We describe services already integrated into AIOpsLAB in Section 2.3.

As shown in Figure 2, to create realistic benchmark scenarios, the Orchestrator then interfaces with two entities: (1) a *workload generator* ⑤ and (2) a *fault generator* ③. These generators introduce controlled service disruptions that simulate live benchmark problems. As the workload generator, AIOpsLAB currently uses the `wrk2` tool (Gan et al., 2019), which supports several workload policies and also replays industry workloads ⑥. However, the AIOpsLAB is extensible to other workload generators. For fault generation, AIOpsLAB uses a custom fault library that instantiates faults across different levels of the system stack ④, such as application and virtualization. The library contains and extends to several fine-grained and parametric faults that go beyond surface-level symptoms and engage deeper into more complex resolution strategies. We describe the fault library in detail in Section 2.4.

Problem Evaluators. Finally, the Orchestrator plays a critical role in evaluating the agent’s performance on a problem. It compares the agent’s solutions against predefined success criteria and evaluation metrics specific to each task ⑩. AIOpsLAB supports several default and common metrics for each task (e.g., Time-to-Detect for detection, number of steps taken, and tokens produced by an LLM-powered agent sent to AIOpsLAB). Additionally, AIOpsLAB provides an optional qualitative evaluation of agent trajectories using LLMs-as-Judges (Zheng et al., 2024). Beyond that, all user-defined evaluation metrics specific to the problem are run. For instance, for the localization problem in Example 2.1, the metric success is defined by the agent’s submission matching the fault microservice’s name. Lastly, the Orchestrator maintains comprehensive logs of all agent trajectories, including actions taken and resulting system states, facilitating detailed analysis and debugging. All of the evaluation results will be automatically collected.

2.3 Cloud Services

AIOpsLAB deploys live microservice applications as cloud environments ②. AIOpsLAB is currently integrated with the HotelReservation and SocialNetwork from DeathStarBench (Gan et al., 2019). The SocialNetwork application has 28 microservices, including Memcached, MongoDB, and Redis, that together implement several features of real-

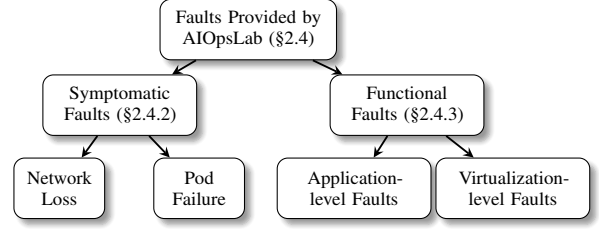


Figure 3. Fault categories to instantiate problems in AIOpsLAB.

Table 1. Task taxonomy for AIOps agent evaluation. The lower the level, the easier the task. AIOpsLAB aims to evaluate agents across all task levels with its problems.

Level	Task (# sub tasks)	Evaluation Focus
1	Detection (1)	Can the approach accurately detect anomalies or deviations?
2	Localization (1)	Can the approach pinpoint a fault’s exact source (e.g., microservice)?
3	Root Cause Analysis (RCA) (2)	Can the approach determine the underlying cause of the fault?
4	Mitigation (1)	Can the approach give effective solutions to recover the environment?

world social networking applications. The HotelReservation application, implemented with Go and gRPC, supports services like recommending and reserving hotels.

2.4 Task-oriented Fault Library

2.4.1 Task Taxonomy

We present a task-level taxonomy (Table 1) that categorizes the tasks that AIOps agents should accomplish according to the different stages of the incident management lifecycle, with progressively increasing complexity. In Table 1, a higher level indicates a harder and more impactful task to evaluate agents.

Level 1 focuses on the preliminary identification of unusual behavior within the system, for example, detecting a malfunctioning Kubernetes pod of a microservice. Also, users can define more complex tasks or create sub-tasks. The root cause analysis task has both the system level and fault type prediction sub-tasks to be solved.

To instantiate problems across different task levels, we use fault injection to inject faults into the system, and construct a problem pool for AIOpsLAB. We classify them into two main types, symptomatic faults and functional faults, as shown in Figure 3.

2.4.2 Symptomatic Faults

Symptomatic faults, such as performance degradation and crash failures, manifest as observable symptoms, such as increased latency, resource exhaustion, or service outages. These faults typically help to construct Level 1 and Level 2 tasks in the taxonomy, which can create problems that evaluate AIOps approaches’ detection and localization ability. These faults provide an overview of potential problems but do not necessarily reveal the deeper, underlying root

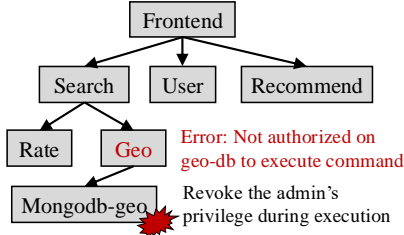


Figure 4. Revoke authentication fault example. Injection happens at Mongodb-geo service, while Geo service will be abnormal and generate error logs.

causes of issues (since they do not have one). AIOpsLAB integrates the fault injection tool, Chaos-Mesh (ChaosMesh Authors, 2022), to inject symptomatic faults into microservice applications.

2.4.3 Functional Faults

Though there are many fault injection tools for testing the resilience of cloud systems (Marinescu and Candea, 2009; Banabic and Candea, 2012; Christakis et al., 2017; Zhang and Elbaum, 2012; Kingsbury, 2022; Pillai et al., 2014; Alquraan et al., 2018; Lu et al., 2019; Chen et al., 2020; Leesatapornwongsa et al., 2014; Gunawi et al., 2011; Majumdar and Niksic, 2018; Ju et al., 2013; Heorhiadi et al., 2016; Alagappan et al., 2016; Mohan et al., 2018; Sun et al., 2022; Canini et al., 2012), most of them focus solely on injecting system symptoms. These coarse-grained faults can only disrupt without modeling the underlying, fine-grained root causes, e.g., misconfigurations or software bugs, and hence are unable to evaluate the capabilities of AIOps agents to diagnose and mitigate root causes.

The failure scenarios to evaluate AIOps agents across tasks must go beyond simple performance or crash failures, and reflect realistic cases that challenge agents, where functional faults come into play. Functional faults require approaches to not only detect (Level 1) and localize (Level 2) the failure but also diagnose the root cause (Level 3), such as incorrect deployment or operations, and apply the correct mitigation strategies (Level 4). For instance, the fault in Figure 4 revokes the admin authentication for the MongoDB database of the geographic microservice (Mongodb-geo). Since the Geo service relies on its backend database, errors will appear during its invocation.

Example 2.4. In the following example, we illustrate the structure of the application-level fault injector for a revoke authentication fault and its usage example in AIOpsLAB.

```
1 from aiopslab.generators.fault.base import
  FaultInjector
2 from aiopslab.service.apps.hotelres import
  HotelReservation
3 class ApplicationFaultInjector(FaultInjector):
4     def inject_revoke_auth(self, microservices:
5         list[str]):
6         """Revoke MongoDB admin privileges."""
7         ...
8     def recover_revoke_auth(self, microservices:
9         list[str]):
```

```
8         """Recover the revoke admin privileges
9         fault."""
10        ...
11    # Usage Example
12    class MongoDBRevokeAuth:
13        def __init__(self):
14            self.app = HotelReservation()
15
16        def inject_fault(self):
17            injector = ApplicationFaultInjector(ns)
18            injector._inject(["mongodb-geo"], "
19                revoke_auth")
```

Users can define problems using the existing fault library. For instance, users can specify different faulty services or even construct a task that injects multiple faults into multiple services concurrently. Users can also customize their faults to generate various problems. AIOpsLAB provides the injection function for its associated failure scenarios and offers the corresponding mitigation mechanism to recover the system from the erroneous state. In Section 3.3, we will discuss the current problem pool we implement.

2.5 Observability

AIOpsLAB is equipped with an extensible observability layer to provide comprehensive monitoring capabilities. AIOpsLAB collects a wide array of telemetry data by its telemetry collector, including (1) traces from Jaeger (Jaeger Authors, 2024) detailing the end-to-end paths of requests through distributed systems, (2) application logs retrieved by Kubectl, or formatted and recorded by Filebeat (Elasticsearch, 2024b) and Logstash (Elasticsearch, 2024a), and (3) system metrics monitored by Prometheus (Prometheus Authors, 2024). AIOpsLAB not only supports data collection during the interaction with the LLM agent but can also export the data offline to facilitate evaluating other traditional AIOps approaches. Besides, AIOpsLAB is designed to capture information from other dimensions, e.g., codebase, configuration, and cluster information. Developers can also design and expose low-level system information (such as syscall logs) to agents using AIOpsLAB’s interface.

3 EVALUATION

This section begins by outlining the evaluation setup and metrics employed within AIOpsLAB. We then delve into the selected faults listed in Table 2, which serve as diverse evaluation scenarios within AIOpsLAB. Following this, we evaluate the performance of the AIOps agents solving these problems, and then analyze the cost of the agents. We also dig into the reasons behind the performance differences to understand the challenges and potential agent improvements. Note that, all of the results are automatically collected and recorded by the problem evaluators (Section 2.2.3).

3.1 Evaluation Setup

We evaluate four LLM-based agents with AIOpsLAB. Note that, for a fair comparison, we register the naive agent in AIOpsLAB without any fine-tuning or modifications. We

Table 2. **Selected faults used to instantiate the problems for evaluation in AIOpsLab.** Ext. stands for extensibility. ● denotes the fault can be easily used to construct other problems; ① denotes there is some manual effort needed to create new problems; while ○ means the fault is specific to some problems and cannot be applied to create other problems.

No.	Name	Application	Task Level	Category	Ext.	# Problem	Description
1	AuthenticationMissing	HotelReservation	1, 2, 3, 4	Functional Virtualization	①	4	Missing authentication credentials cause access denial to MongoDB.
2	TargetPortMisconfig	SocialNetwork	1, 2, 3, 4	Functional Virtualization	●	12	The service cannot connect to the specified port due to misconfiguration.
3	RevokeAuth	HotelReservation	1, 2, 3, 4	Functional Application	①	8	Revoked authentication causes database connection failure.
4	UserUnregistered	HotelReservation	1, 2, 3, 4	Functional Application	①	8	The database service has access failures after the user was unregistered.
5	BuggyApplImage	HotelReservation	1, 2, 3, 4	Functional Application	○	4	Connection code bug in the application image causes access issues.
6	ScalePod	SocialNetwork	1, 2, 3, 4	Functional Virtualization	●	4	Incorrect scaling operation makes the number of pod zero for a service.
7	AssignNonExistentNode	SocialNetwork	1, 2, 3, 4	Functional Virtualization	●	4	Pod in a pending a failure status due to wrong assignment to a non-existent node.
8	NetworkLoss	HotelReservation	1, 2	Symptomatic	●	2	Network loss causes communication failures for a specific service.
9	PodFailure	HotelReservation	1, 2	Symptomatic	●	2	Service interruption due to a pod failure.
10	Noop	HotelReservation SocialNetwork	1	-	●	2	No faults injected into the system.

use GPT-3.5-TURBO and GPT-4-TURBO (Achiam et al., 2023) that have access to only a secure shell as baselines (GPT-w-SHELL). In addition, we also evaluate the performance of REACT (Yao et al., 2023), which extends chain-of-thought reasoning (Wei et al., 2022b) by integrating reasoning and acting in an interleaved manner,

As for cloud operation-specific agents, we choose FLASH (Zhang et al., 2024b). FLASH employs a workflow automation system that monitors execution status and decomposes complex instructions into manageable, conditional segments. It incorporates hindsight generation to learn from past interactions. As FLASH was not publicly available at the time of writing, we develop a simplified version that retrospectively generates insights after each step.

To compare with other AIOps approaches specific to a certain type of task, we evaluate three state-of-the-art, non-LLM-based AIOps algorithms on AIOpsLab, using (multi-modal) telemetry data as input. They are: MKSMC (Çetin and Tasgin, 2020) for detection, RMLAD (Wang et al., 2020) and PDiagnose (Hou et al., 2021) for localization.

3.2 Metrics

Correctness. This metric measures the accuracy of the agent’s response to problems. It evaluates whether the agent successfully detects, localizes, analyzes and resolves the problems as expected.

Time/Steps. These metrics evaluate the efficiency of the AIOps agent for each type of task. For example, Time-to-Detect (TTD) is the time elapsed from the occurrence of a fault to its detection, and Time-to-Mitigate (TTM) is the time taken from detection to complete mitigation of the fault. The number of steps or actions taken to solve the problem is also recorded. Note that this is the number of times the

agent interacts with the AIOpsLab instead of the number of requests sent to the backend LLM.

Cost. We use the number of tokens, including both the input token and output tokens, generated by the agents/environment as an indicator of the cost.

3.3 Problem Pool of AIOpsLab Benchmark

Currently, AIOpsLab benchmark consists of 48 problems in its problem pool. With six agents, we evaluate a total of 288 cases. Table 2 lists the faults used to instantiate the problems. As shown in Table 2, all functional faults (including Fault 1-7) are used to create problems at all of the four task levels; while the symptomatic faults (including Fault 8-9) can only be used to create problems at the detection and localization levels (Level 1 and Level 2). In the detection-level task, the agents must identify the presence of faults in real-time. This task is a binary classification, where the agents have to respond either “yes” if a fault is present or “no” on the contrary. The detection task (Level 1) can be made more complex, e.g., by asking the agents to label the abnormal telemetry data; however, we keep it simple here and leave the complex tasks to other levels. The localization (Level 2) task asks the agents to specify the exact location of the fault, usually a service or pod name in Kubernetes. The RCA task (Level 3) requires the agents to identify (1) the system layer the fault affects and (2) the type of the fault, e.g., misconfiguration or operation error. The mitigation task (Level 4) requires the agents to *interact with the environment* to fix the fault with a series of actions, such as updating the configuration, or rollback to a previous version, etc.

Most faults enable users to extend and create new problems easily by injecting the fault into other targets, such as services. For example, Fault 2 in AIOpsLab can be

Table 3. Overall performance of different agents. We show the lines of code (LoC) to register the agent in AIOpsLAB, average running time in seconds, average number of steps taken, average tokens used, and accuracy across all problems.

Agent	LoC	Time (s)	# Steps	Tokens	Acc.
GPT-4-W-SHELL	41	28.61	6.44	6,394.5	49.15%
GPT-3.5-W-SHELL	41	12.44	14.70	2,557.95	15.25%
REACT	49	43.79	11.50	16,941.46	55.93%
FLASH	60	99.64	8.48	6,484.25	59.32%

injected into 10 services by simply configuring the injection target. We select the “user-service”, “text-service”, and “post-storage-service” from SocialNetwork as injection targets. Injecting faults into different targets is crucial because each service may have distinct dependencies, resulting in varied fault “blast radius” or failure propagation topologies. Consequently, faults can manifest at different locations within the microservice architecture to help evaluate the ability of the AIOps agents since different locations may indicate distinct difficulties. Applying some faults to construct problems may require additional effort. For example, Fault 3 and Fault 4 require the users to not only prepare the scripts to trigger the admin privilege revoke or user unregistration during the testing, but also update the config map of the application in Kubernetes; and Fault 1 needs to enforce its TLS requirements through a Helm configuration update. Furthermore, some faults are designed for specific problems and are not readily adaptable, such as Fault 5, which involves an application-level code bug in the microservice’s image.

3.4 Performance Results

The overall performance of the agents is summarized in Table 3, with task-specific results in Table 4. As illustrated in Table 3, FLASH achieves the highest accuracy among all agents. Although GPT-3.5-TURBO completes the tasks the fastest, it has the lowest accuracy at 15.25%.

The detection task, being a binary choice question, should be the simplest task and the first step an AIOps agent performs. However, as shown in Table 4(a), only FLASH answers all the detection problems correctly. For localization task, agents are allowed to come up with a list of potential faulty services as their answers (since there could be multiple faults happening in the system at the same time). To evaluate their accuracy, we consider both the top 1 and top 3 answers. In Table 4(b), REACT performs best when evaluated using the top 3 answers, but its accuracy drops when considering the top 1. The RCA and mitigation tasks prove to be the most challenging for the agents. GPT-3.5-W-SHELL fails to recover any failure in its mitigation attempts.

Problem difficulty differs across task levels. Despite showing promise in addressing realistic operational tasks, none of the agents consistently achieve high problem-solving accuracy across four task categories in AIOpsLAB benchmark.

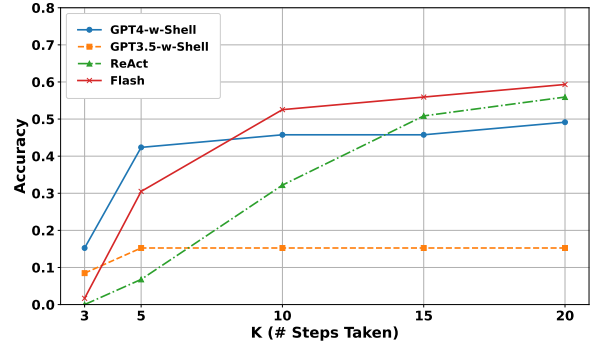


Figure 5. Agent performance vs. number of steps taken.

Even the top-performing agents, such as FLASH, exhibit limitations, particularly when tackling more complex tasks like mitigation. In Section 3.6, we will explore in detail the failure modes and challenges contributing to these performance limitations of agents, and opportunities for improvement.

3.5 Influence of the Step Limit

We examine the impact of the maximum number of allowed steps on the agent’s performance, with the results shown in Figure 5. The step limit significantly affects the performance of certain agents. For instance, REACT and FLASH show improved accuracy with more steps, with FLASH reaching the highest accuracy of 59.32% when the step limit is set to 20. However, for GPT-3.5-TURBO, increasing the step limit beyond 5 does not yield better performance but merely increases the token consumption. Notably, the plateauing of accuracy after a certain number of steps indicates that *self-repair with environment feedback can saturate quickly for AIOps problems*. On the contrary, in development tasks (Dev), such as code generation, feedback via various compositional tools such as linters, type checkers, and test cases help agents continuously improve. This suggests the need for (1) better task decomposition for AIOps problems using planning, (2) improved feedback mechanisms for intermediate steps, and (3) solutions that go beyond environment feedback and self-repair.

3.6 Agent Behavior: The Good, the Bad and the Gaps

We now delve into the behaviors of the agents and analyze the good, the challenges, and opportunities for improvement. In Table 4, we see that all agents perform better than the traditional non-LLM AIOps methods in terms of the problems for detection and localization tasks. Figure 6, shows the telemetry API usage patterns among agents. The get_logs API is the most frequently used API across all agents, then the get_metrics, and the get_traces APIs. However, agents also diverge in their patterns of API usage. For example, FLASH does not use the get_traces API at all. We present the occurrences of other system commands for each agent in Table 5. We next discuss the underlying reasons and patterns contributing to the agents’ poor

is correct), such as malformed parameters, and repeat the error in subsequent steps. In many cases, GPT-3.5-W-SHELL repeatedly responds with: “I apologize for the error. Here is the API call again:” followed by the same/similar mistake. This issue is observed as many as 14 times within a 20-step problem-solving case.

Similar issues with invalid API usage are also observed in other agents. For instance, the REACT agent occasionally generates incorrect API commands, but typically recovers by reasoning through the errors and self-correcting its commands. In the following example, REACT uses an incorrect parameter for the `get_logs` API, but subsequently corrects it by checking the existing services in its next step.

```
REACT: get_logs("test-social-network", "Social Network")
AIOpsLAB: Error: Your service/namespace does not exist.
REACT:
Thought: I should check the services deployed within the test-social-network namespace to ensure I use the correct service name.
Action: I will list the services in the test-social-network namespace to confirm the correct name of the service.
exec_shell("kubectl get services -n test-social-network")
```

3.6.4 False positive detection issues

To further evaluate the agents’ performance, we set up two detection problems for the two microservice applications where no faults exist, referred to as no operation (Fault 10 – Noop in Table 2) problems. Only GPT-4-W-SHELL correctly identify these cases as normal system execution, while the others report false positives, misinterpreting normal activities (e.g., standard workload generation) as faults.

4 DISCUSSION

AIOpsLAB helps engineers to easily create customized incident scenarios for evaluating agents. By providing Agent Cloud Interfaces (ACIs) as guard-rails, AIOpsLAB ensures that agents are tested within a controlled environment, allowing users to focus on designing scenarios that accurately represent incidents in their systems and defining the specific problems their agents should solve.

AIOpsLAB is also adaptable to other fault types. For example, an anomaly detection workload scenario can be introduced for detection tasks. Further, users can create problems where agents are required to label the workload or telemetry data to identify anomalies.

When implementing problem evaluators, fine-grained evaluation oracles, or AIOpsLAB’s optional LLM-as-Judge, may be necessary. For instance, in the binary-choice detection task, agents may answer correctly but provide incorrect interpretations or reasoning. In one case, an agent claimed to detect an abnormal system behavior, but its explanation referenced a workload that was, in fact, normal and unrelated to the injected fault. Leveraging AIOpsLAB’s LLM-as-Judges can help address this issue by comparing the LLM reasoning chains with the problem description (including

the fault, workload, and environment setup).

5 RELATED WORK

AgentOps. Recent advancements in cloud management have increasingly incorporated LLMs to enhance operational tasks. Approaches such as fine-tuned GPT models (Ahmed et al., 2023), RCACopilot (Chen et al., 2024), RCAgent (Wang et al., 2023), MonitorAssistant (Yu et al., 2024a), and Xpert (Jiang et al., 2024) illustrate the effectiveness of LLMs in monitoring and analyzing complex system behaviors. However, beyond the lack of publicly available implementations and associated private datasets, there is a notable gap: the absence of a unified benchmark capable of providing realistic evaluation scenarios to assess agents’ performance across operational tasks.

AIOps benchmarks. Existing AIOps benchmarks primarily rely on static or text-based datasets, such as system metrics (Han et al., 2022; Jacob et al., 2020), typically time series data, or fixed question-answer format (Liu et al., 2023). These benchmarks, together with the general Language Model benchmarks (Hendrycks et al., 2021b;a; Liang et al., 2023; Lee et al., 2024; BIG-bench authors, 2023; Huang et al., 2023), do not simulate the dynamic and complex cloud environments, not to mention allowing agents to interact with them to solve operational tasks.

6 CONCLUSION

In this paper, we unravel the requirements and challenges for a comprehensive framework that supports the design, development, and evaluation of autonomous AIOps agents. We develop a framework, AIOpsLAB, which combines a fault injector, workload generator, cloud-agent orchestrator, and telemetry observer to simulate cloud incidents and provide an agent-cloud interface for orchestrating and evaluating AIOps agents. We leverage AIOpsLAB to construct a benchmark suite with 48 problems and evaluate four agents to demonstrate the application of AIOpsLAB in evaluating LLM-based agents across different types of AIOps tasks.

REFERENCES

- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. 2023. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774* (2023).
- Toufique Ahmed, Supriyo Ghosh, Chetan Bansal, Thomas Zimmermann, Xuchao Zhang, and Saravan Rajmohan. 2023. Recommending Root-Cause and Mitigation Steps for Cloud Incidents using Large Language Models. In *Proceedings of the 45th International Conference on Software Engineering (ICSE’23)*.

- Ramnatthan Alagappan, Aishwarya Ganesan, Yuvraj Patel, Thanumalayan Sankaranarayanan Pillai, Andrea C. Arpaci-Dusseau, and Remzi H. Arpaci-Dusseau. 2016. Correlated Crash Vulnerabilities. In *Proceedings of the 12th USENIX Conference on Operating Systems Design and Implementation (OSDI'16)*.
- Ahmed Alquraan, Hatem Takturi, Mohammed Alfatafta, and Samer Al-Kiswany. 2018. An Analysis of Network-Partitioning Failures in Cloud Systems. In *Proceedings of the 13th USENIX Conference on Operating Systems Design and Implementation (OSDI'18)*.
- Radu Banabic and George Candea. 2012. Fast Black-Box Testing of System Recovery Code. In *Proceedings of the 7th European Conference on Computer Systems (EuroSys'12)*.
- BIG-bench authors. 2023. Beyond the Imitation Game: Quantifying and extrapolating the capabilities of language models. *Transactions on Machine Learning Research* (2023).
- Marco Canini, Daniele Venzano, Peter Perešini, Dejan Kostić, and Jennifer Rexford. 2012. A NICE Way to Test OpenFlow Applications. In *Proceedings of the 9th USENIX Conference on Networked Systems Design and Implementation (NSDI'12)*.
- Uzay Çetin and Mursel Tasgin. 2020. Anomaly detection with multivariate K-sigma score using Monte Carlo. In *2020 5th International Conference on Computer Science and Engineering*.
- ChaosBlade Team. 2019. ChaosBlade. <https://github.com/chaosblade-io/chaosblade>. Accessed: 2024-07-08.
- ChaosMesh Authors. 2022. ChaosMesh. <https://chaos-mesh.org/>. Accessed: 2024-07-08.
- Haicheng Chen, Wensheng Dou, Dong Wang, and Feng Qin. 2020. CoFI: Consistency-Guided Fault Injection for Cloud Systems. In *Proceedings of the 35th ACM/IEEE International Conference on Automated Software Engineering (ASE'20)*.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde De Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. 2021. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374* (2021).
- Yinfang Chen, Huaibing Xie, Minghua Ma, Yu Kang, Xin Gao, Liu Shi, Yunjie Cao, Xuedong Gao, Hao Fan, Ming Wen, Jun Zeng, Supriyo Ghosh, Xuchao Zhang, Chaoyun Zhang, Qingwei Lin, Saravan Rajmohan, Dongmei Zhang, and Tianyin Xu. 2024. Automatic Root Cause Analysis via Large Language Models for Cloud Incidents. In *Proceedings of the Nineteenth European Conference on Computer Systems (EuroSys'24)*.
- Maria Christakis, Patrick Emmisberger, Patrice Godefroid, and Peter Müller. 2017. A General Framework for Dynamic Stub Injection. In *Proceedings of the 39th International Conference on Software Engineering (ICSE'17)*.
- Yuanshun Dai, Yanping Xiang, and Gewei Zhang. 2009. Self-healing and Hybrid Diagnosis in Cloud Computing. In *Cloud Computing*, Martin Gilje Jaatun, Gansen Zhao, and Chunming Rong (Eds.). Springer Berlin Heidelberg, Berlin, Heidelberg.
- Elasticsearch. 2024a. Centralize, transform & stash your data. <https://www.elastic.co/logstash>.
- Elasticsearch. 2024b. Lightweight shipper for logs. <https://www.elastic.co/beats/filebeat>.
- Yu Gan, Yanqi Zhang, Dailun Cheng, Ankitha Shetty, Priyal Rathi, Nayan Katarki, Ariana Bruno, Justin Hu, Brian Ritchken, Brendon Jackson, et al. 2019. An open-source benchmark suite for microservices and their hardware-software implications for cloud & edge systems. In *Proceedings of the 24th International Conference on Architectural Support for Programming Languages and Operating Systems (ASPLOS'19)*.
- Vaibhav Ganatra, Anjaly Parayil, Supriyo Ghosh, Yu Kang, Minghua Ma, Chetan Bansal, Suman Nath, and Jonathan Mace. 2023. Detection Is Better Than Cure: A Cloud Incidents Perspective. In *Proceedings of the 31st Joint European Software Engineering Conference and Symposium on the Foundations of Software Engineering (ESEC/FSE'23)*.
- Haryadi S. Gunawi, Thanh Do, Pallavi Joshi, Peter Alvaro, Joseph M. Hellerstein, Andrea C. Arpaci-Dusseau, Remzi H. Arpaci-Dusseau, Koushik Sen, and Dhruba Borthakur. 2011. Fate and Destini: A Framework for Cloud Recovery Testing. In *Proceedings of the 8th USENIX Symposium on Networked Systems Design and Implementation (NSDI'11)*.
- Songqiao Han, Xiyang Hu, Hailiang Huang, Minqi Jiang, and Yue Zhao. 2022. ADBench: Anomaly Detection Benchmark. In *Thirty-sixth Conference on Neural Information Processing Systems Datasets and Benchmarks Track*.
- Shilin He, Botao Feng, Liquan Li, Xu Zhang, Yu Kang, Qingwei Lin, Saravan Rajmohan, and Dongmei Zhang. 2023. STEAM: Observability-Preserving Trace Sampling. Association for Computing Machinery.

- Shilin He, Xu Zhang, Pinjia He, Yong Xu, Liqun Li, Yu Kang, Minghua Ma, Yining Wei, Yingnong Dang, Saravanakumar Rajmohan, et al. 2022. An empirical study of log analysis at Microsoft. In *Proceedings of the 30th ACM Joint European Software Engineering Conference and Symposium on the Foundations of Software Engineering (ESEC/FSE)*.
- Helm. 2024. *Helm: The package manager for Kubernetes*.
- Dan Hendrycks, Collin Burns, Steven Basart, Andrew Critch, Jerry Li, Dawn Song, and Jacob Steinhardt. 2021a. Aligning AI With Shared Human Values. *Proceedings of the International Conference on Learning Representations (ICLR'21)* (2021).
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. 2021b. Measuring Massive Multitask Language Understanding. *Proceedings of the International Conference on Learning Representations (ICLR'21)* (2021).
- Victor Heorhiadi, Shriram Rajagopalan, Hani Jamjoom, Michael K Reiter, and Vyas Sekar. 2016. Gremlin: Systematic Resilience Testing of Microservices. In *Proceedings of the IEEE 36th International Conference on Distributed Computing Systems (ICDCS'16)*.
- Chuanjia Hou, Tong Jia, Yifan Wu, Ying Li, and Jing Han. 2021. Diagnosing performance issues in microservices with heterogeneous data source. In *2021 IEEE Intl Conf on Parallel & Distributed Processing with Applications, Big Data & Cloud Computing, Sustainable Computing & Communications, Social Computing & Networking (ISPA/BDCloud/SocialCom/SustainCom)*.
- Yuzhen Huang, Yuzhuo Bai, Zhihao Zhu, Junlei Zhang, Jinghan Zhang, Tangjun Su, Junteng Liu, Chuancheng Lv, Yikai Zhang, Jiayi Lei, Yao Fu, Maosong Sun, and Junxian He. 2023. C-Eval: A Multi-Level Multi-Discipline Chinese Evaluation Suite for Foundation Models. In *Advances in Neural Information Processing Systems (NeurIPS'23)*.
- Vincent Jacob, Fei Song, Arnaud Stiegler, Yanlei Diao, and Nesime Tatbul. 2020. AnomalyBench: An Open Benchmark for Explainable Anomaly Detection. *CoRR* (2020).
- Jaeger Authors. 2024. Jaeger: Open source, end-to-end distributed tracing. <https://www.jaegertracing.io>.
- Naman Jain, King Han, Alex Gu, Wen-Ding Li, Fanjia Yan, Tianjun Zhang, Sida Wang, Armando Solar-Lezama, Koushik Sen, and Ion Stoica. 2024a. LiveCodeBench: Holistic and Contamination Free Evaluation of Large Language Models for Code. *arXiv preprint arXiv:2403.07974* (2024).
- Naman Jain, Manish Shetty, Tianjun Zhang, King Han, Koushik Sen, and Ion Stoica. 2024b. R2E: Turning any Github Repository into a Programming Agent Environment. In *Forty-first International Conference on Machine Learning (ICML'24)*.
- Yuxuan Jiang, Chaoyun Zhang, Shilin He, Zhihao Yang, Minghua Ma, Si Qin, Yu Kang, Yingnong Dang, Saravan Rajmohan, Qingwei Lin, and Dongmei Zhang. 2024. Xpert: Empowering Incident Management with Query Recommendations via Large Language Models. In *Proceedings of the 46th IEEE/ACM International Conference on Software Engineering (ICSE'24)*.
- Carlos E Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik R Narasimhan. 2024. SWE-bench: Can Language Models Resolve Real-world Github Issues?. In *The Twelfth International Conference on Learning Representations (ICLR'24)*.
- Xiaoen Ju, Livio Soares, Kang G. Shin, Kyung Dong Ryu, and Dilma Da Silva. 2013. On Fault Resilience of Open-Stack. In *Proceedings of the 12th ACM Symposium on Cloud Computing (SOCC'13)*.
- Kyle Kingsbury. 2022. Jepsen. <https://jepsen.io/>.
- Tony Lee, Michihiro Yasunaga, Chenlin Meng, Yifan Mai, Joon Sung Park, Agrim Gupta, Yunzhi Zhang, Deepak Narayanan, Hannah Teufel, Marco Bellagente, et al. 2024. Holistic evaluation of text-to-image models. *Advances in Neural Information Processing Systems (NeurIPS'24)* (2024).
- Tanakorn Leesatapornwongsa, Mingzhe Hao, Pallavi Joshi, Jeffrey F. Lukman, and Haryadi S. Gunawi. 2014. SAMC: Semantic-Aware Model Checking for Fast Discovery of Deep Bugs in Cloud Systems. In *Proceedings of the 11th USENIX Conference on Operating Systems Design and Implementation (OSDI'14)*.
- Wenrui Li, Pengcheng Zhang, and Zhongxue Yang. 2012. A Framework for Self-Healing Service Compositions in Cloud Computing Environments. In *2012 IEEE 19th International Conference on Web Services (ICWS'12)*.
- Percy Liang, Rishi Bommasani, Tony Lee, Dimitris Tsipras, Dilara Soylu, Michihiro Yasunaga, Yian Zhang, Deepak Narayanan, Yuhuai Wu, Ananya Kumar, Benjamin Newman, Binhang Yuan, Bobby Yan, Ce Zhang, Christian Cosgrove, Christopher D. Manning, Christopher Ré, Diana Acosta-Navas, Drew A. Hudson, Eric Zelikman, Esin Durmus, Faisal Ladhak, Frieda Rong, Hongyu Ren, Huaxiu Yao, Jue Wang, Keshav Santhanam, Laurel Orr, Lucia Zheng, Mert Yuksekogun, Mirac Suzgun, Nathan Kim, Neel Guha, Niladri Chatterji, Omar Khattab, Peter Henderson, Qian Huang, Ryan Chi,

- Sang Michael Xie, Shibani Santurkar, Surya Ganguli, Tatsunori Hashimoto, Thomas Icard, Tianyi Zhang, Vishrav Chaudhary, William Wang, Xuechen Li, Yifan Mai, Yuhui Zhang, and Yuta Koreeda. 2023. Holistic Evaluation of Language Models.
- Yuhe Liu, Changhua Pei, Longlong Xu, Bohan Chen, Mingze Sun, Zhirui Zhang, Yongqian Sun, Shenglin Zhang, Kun Wang, Haiming Zhang, et al. 2023. Op-sEval: A Comprehensive Task-Oriented AIOps Benchmark for Large Language Models. *arXiv preprint arXiv:2310.07637* (2023).
- Jie Lu, Chen Liu, Lian Li, Xiaobing Feng, Feng Tan, Jun Yang, and Liang You. 2019. CrashTuner: Detecting Crash-Recovery Bugs in Cloud Systems via Meta-Info Analysis. In *Proceedings of the 26th ACM Symposium on Operating System Principles (SOSP'19)*.
- Minghua Ma, Shenglin Zhang, Dan Pei, Xin Huang, and Hongwei Dai. 2018. Robust and rapid adaption for concept drift in software system anomaly detection. In *2018 IEEE 29th International Symposium on Software Reliability Engineering (ISSRE)*. IEEE, 13–24.
- Rupak Majumdar and Filip Niksic. 2018. Why is Random Testing Effective for Partition Tolerance Bugs?. In *Proceedings of the 45th ACM SIGPLAN Symposium on Principles of Programming Languages (POPL'18)*.
- Paul D Marinescu and George Candea. 2009. LFI: A Practical and General Library-Level Fault Injector. In *Proceedings of the 39th IEEE/IFIP International Conference on Dependable Systems and Networks (DSN'09)*.
- Grégoire Mialon, Roberto Dessì, Maria Lomeli, Christoforos Nalmpantis, Ram Pasunuru, Roberta Raileanu, Baptiste Rozière, Timo Schick, Jane Dwivedi-Yu, Asli Celikyilmaz, et al. 2023. Augmented language models: a survey. *arXiv preprint arXiv:2302.07842* (2023).
- Jayashree Mohan, Ashlie Martinez, Soujanya Ponnappalli, Pandian Raju, and Vijay Chidambaram. 2018. Finding Crash-Consistency Bugs with Bounded Black-Box Crash Testing. In *Proceedings of the 13th USENIX Conference on Operating Systems Design and Implementation (OSDI'18)*.
- Netflix. 2011. ChaosMonkey. <https://github.com/Netflix/chaosmonkey>. Accessed: 2024-07-08.
- Thanumalayan Sankaranarayanan Pillai, Vijay Chidambaram, Samer Al Kiswany, Andrea C. Arpaci-Dusseau, and Remzi H. Arpaci-Dusseau. 2014. All File Systems Are Not Created Equal: On the Complexity of Crafting Crash-Consistent Applications. In *Proceedings of the 11th USENIX Conference on Operating Systems Design and Implementation (OSDI'14)*.
- Prometheus Authors. 2024. Prometheus. <https://prometheus.io>.
- Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. 2024. Toolformer: Language models can teach themselves to use tools. *Advances in Neural Information Processing Systems (NeurIPS'24)* (2024).
- Jesper Simonsson, Long Zhang, Brice Morin, Benoit Baudry, and Martin Monperrus. 2021. Observability and chaos engineering on system calls for containerized applications in docker. *Future Generation Computer Systems* (2021).
- Gagan Somashekar, Anurag Dutt, Mainak Adak, Tania Lorigo Botran, and Anshul Gandhi. 2024. GAMMA: Graph Neural Network-Based Multi-Bottleneck Localization for Microservices Applications. In *Proceedings of the ACM Web Conference 2024*.
- Akshitha Sriraman and Thomas F Wenisch. 2018. μ suite: a benchmark suite for microservices. In *2018 IEEE International Symposium on Workload Characterization*.
- Xudong Sun, Wenqing Luo, Jiawei Tyler Gu, Aishwarya Ganesan, Ramnathan Alagappan, Michael Gasch, Lalith Suresh, and Tianyin Xu. 2022. Automatic Reliability Testing for Cluster Management Controllers. In *Proceedings of the 16th USENIX Symposium on Operating Systems Design and Implementation (OSDI'22)*.
- Yongqian Sun, Binpeng Shi, Mingyu Mao, Minghua Ma, Sibao Xia, Shenglin Zhang, and Dan Pei. 2024. ART: A Unified Unsupervised Framework for Incident Management in Microservice Systems. In *Proceedings of the 39th IEEE/ACM International Conference on Automated Software Engineering*.
- Lingzhi Wang, Nengwen Zhao, Junjie Chen, Pinnong Li, Wenchi Zhang, and Kaixin Sui. 2020. Root-cause metric location for microservice systems via log anomaly detection. In *2020 IEEE international conference on web services (ICWS'20)*.
- Zefan Wang, Zichuan Liu, Yingying Zhang, Aoxiao Zhong, Lunting Fan, Lingfei Wu, and Qingsong Wen. 2023. Reagent: Cloud root cause analysis by autonomous agents with tool-augmented large language models. *arXiv preprint arXiv:2310.16340* (2023).
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Ed Chi, Quoc Le, and Denny Zhou. 2022a. Chain of thought prompting elicits reasoning in large language models. *arXiv preprint arXiv:2201.11903* (2022).

- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. 2022b. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems (NeurIPS'22)* (2022).
- Sean Wolfe. 2018. Amazon’s one hour of downtime on Prime Day may have cost it up to \$100 million in lost sales. (2018). <https://www.businessinsider.com/amazon-prime-day-website-issues-cost-it-millions-in-lost-sales-2018-7>
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. 2023. ReAct: Synergizing Reasoning and Acting in Language Models. In *International Conference on Learning Representations (ICLR'23)*.
- Zhaoyang Yu, Minghua Ma, Chaoyun Zhang, Si Qin, Yu Kang, Chetan Bansal, Saravan Rajmohan, Yingnong Dang, Changhua Pei, Dan Pei, Qingwei Lin, and Dongmei Zhang. 2024a. MonitorAssistant: Simplifying Cloud Service Monitoring via Large Language Models. In *Companion Proceedings of the 32nd ACM International Conference on the Foundations of Software Engineering (FSE'24)*.
- Zhaoyang Yu, Changhua Pei, Xin Wang, Minghua Ma, Chetan Bansal, Saravan Rajmohan, Qingwei Lin, Dongmei Zhang, Xidao Wen, Jianhui Li, et al. 2024b. Pre-trained KPI Anomaly Detection Model Through Disentangled Transformer. In *Proceedings of the 30th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*.
- Matei Zaharia, Omar Khattab, Lingjiao Chen, Jared Quincy Davis, Heather Miller, Chris Potts, James Zou, Michael Carbin, Jonathan Frankle, Naveen Rao, and Ali Ghodsi. 2024. The Shift from Models to Compound AI Systems. <https://bair.berkeley.edu/blog/2024/02/18/compound-ai-systems/>.
- Pingyu Zhang and Sebastian Elbaum. 2012. Amplifying Tests to Validate Exception Handling Code. In *Proceedings of the 34th International Conference on Software Engineering (ICSE'12)*.
- Qiao Zhang, Guo Yu, Chuanxiong Guo, Yingnong Dang, Nick Swanson, Xinsheng Yang, Randolph Yao, , Murali Chintalapati, Arvind Krishnamurthy, and Thomas Anderson. 2018. Deepview: Virtual Disk Failure Diagnosis and Pattern Detection for Azure. In *Proceedings of the 15th USENIX Symposium on Networked Systems Design and Implementation (NSDI'18)*.
- Xuchao Zhang, Supriyo Ghosh, Chetan Bansal, Rujia Wang, Minghua Ma, Yu Kang, and Saravan Rajmohan. 2024a. Automated Root Causing of Cloud Incidents using In-Context Learning with GPT-4. In *Companion Proceedings of the 32nd ACM International Conference on the Foundations of Software Engineering*.
- Xuchao Zhang, Tanish Mittal, Chetan Bansal, Rujia Wang, Minghua Ma, Zhixin Ren, Hao Huang, and Saravan Rajmohan. 2024b. FLASH: A Workflow Automation Agent for Diagnosing Recurring Incidents. (2024).
- Chenyu Zhao, Minghua Ma, Zhenyu Zhong, Shenglin Zhang, Zhiyuan Tan, Xiao Xiong, LuLu Yu, Jiayi Feng, Yongqian Sun, Yuzhi Zhang, et al. 2023. Robust Multimodal Failure Detection for Microservice Systems. In *Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric Xing, et al. 2024. Judging llm-as-a-judge with mt-bench and chatbot arena. *Advances in Neural Information Processing Systems (NeurIPS'24)* (2024).
- Shuyan Zhou, Frank F Xu, Hao Zhu, Xuhui Zhou, Robert Lo, Abishek Sridhar, Xianyi Cheng, Yonatan Bisk, Daniel Fried, Uri Alon, et al. 2023. WebArena: A Realistic Web Environment for Building Autonomous Agents. *arXiv preprint arXiv:2307.13854* (2023).
- Xiang Zhou, Xin Peng, Tao Xie, Jun Sun, Chao Ji, Wenhui Li, and Dan Ding. 2021. Fault Analysis and Debugging of Microservice Systems: Industrial Survey, Benchmark System, and Empirical Study. *IEEE Transactions on Software Engineering* (2021).