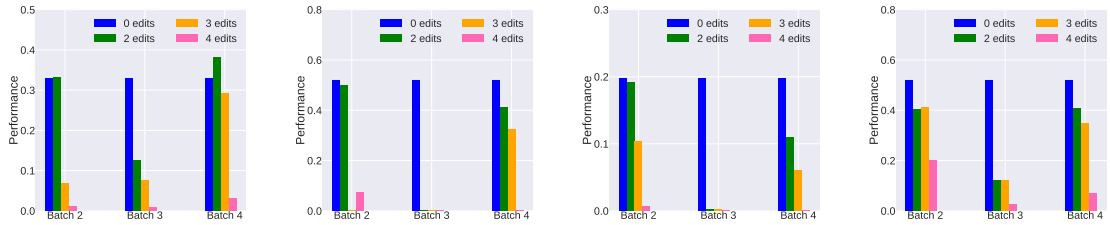

(a) Reasoning (b) NLI (c) Open-domain QA (d) Closed-domain QA

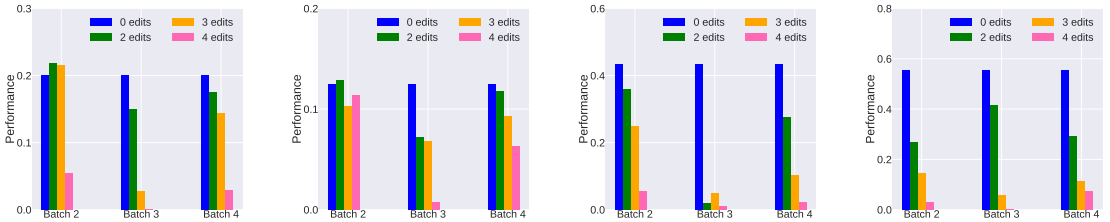

(e) Dialogue (f) Summarization (g) NER (h) Sentiment analysis

Figure 11: Performance on general tasks of edited models using MEND to edit GPT2-XL as the number of edits increases in *batch- and sequential-editing*.

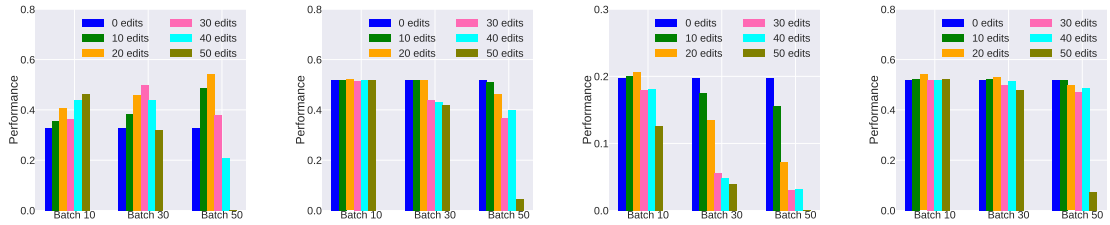

(a) Reasoning (b) NLI (c) Open-domain QA (d) Closed-domain QA

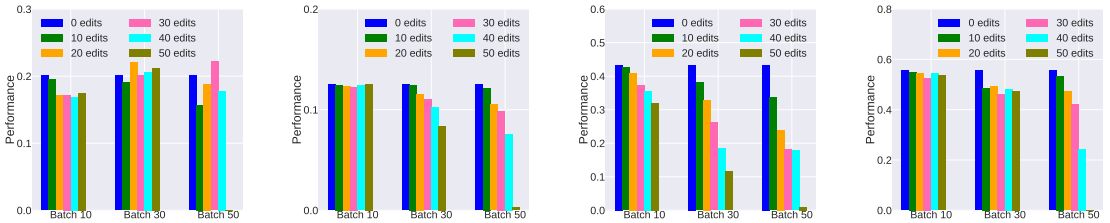

(e) Dialogue (f) Summarization (g) NER (h) Sentiment analysis

Figure 12: Performance on general tasks of edited models using MEMIT to edit GPT2-XL as the number of edits increases in *batch- and sequential-editing*.

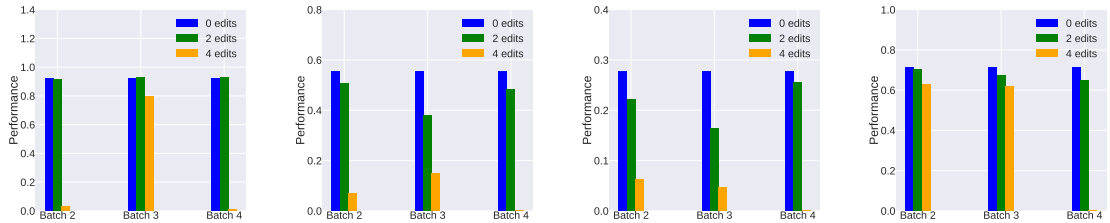

(a) Reasoning (b) NLI (c) Open-domain QA (d) Closed-domain QA

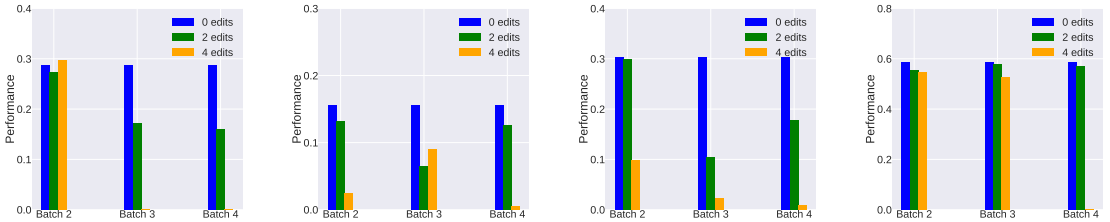

(e) Dialogue (f) Summarization (g) NER (h) Sentiment analysis

Figure 13: Performance on general tasks of edited models using MEND to edit LLaMA-1 (7B) as the number of edits increases in *batch- and sequential-editing*.

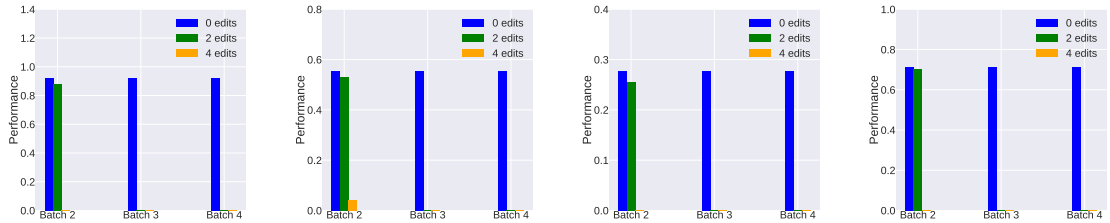

(a) Reasoning (b) NLI (c) Open-domain QA (d) Closed-domain QA

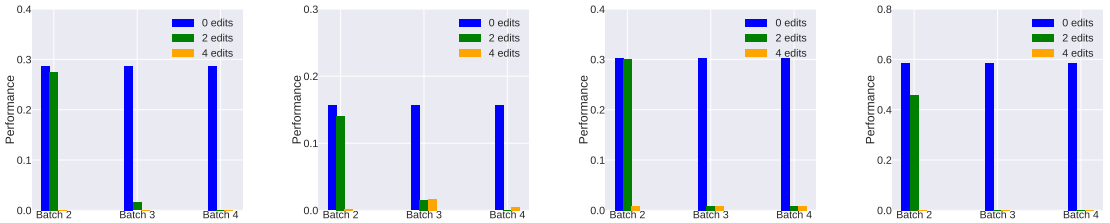

(e) Dialogue (f) Summarization (g) NER (h) Sentiment analysis

Figure 14: Performance on general tasks of edited models using MEMIT to edit LLaMA-1 (7B) as the number of edits increases in *batch- and sequential-editing*.

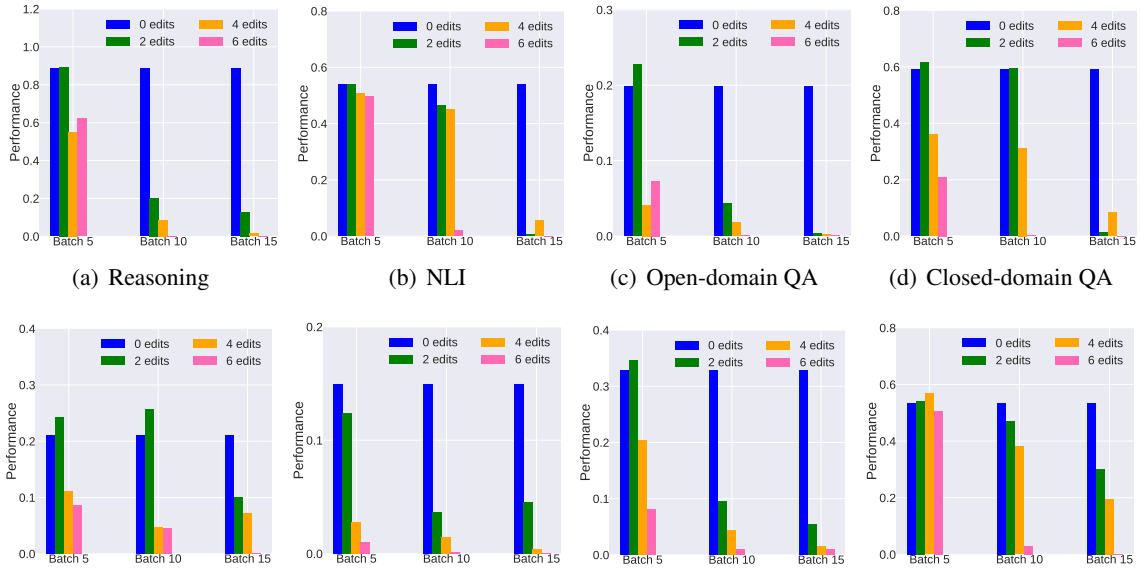

(a) Reasoning (b) NLI (c) Open-domain QA (d) Closed-domain QA

(e) Dialogue (f) Summarization (g) NER (h) Sentiment analysis

Figure 15: Performance on general tasks of edited models using MEND to edit LLaMA-2 (7B) as the number of edits increases in *batch- and sequential-editing*.

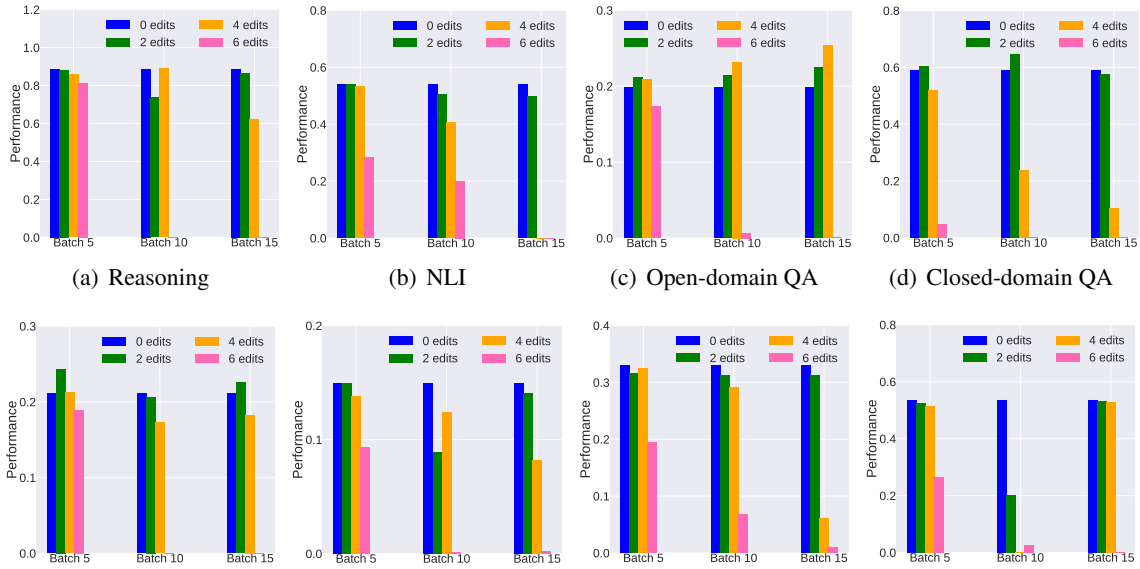

(a) Reasoning (b) NLI (c) Open-domain QA (d) Closed-domain QA

(e) Dialogue (f) Summarization (g) NER (h) Sentiment analysis

Figure 16: Performance on general tasks of edited models using MEMIT to edit LLaMA-2 (7B) as the number of edits increases in *batch- and sequential-editing*.