# PROJECT PHASE-3

## Team – 49

## Relational Model:

1) First create a relation for each strong entities which includes single-valued attributes, if there is a composite key then include only the simple component attributes of a composite attribute.

2)If there is a multi-valued attribute then create a new relation and include the primary key of that particular entity, multi-valued attribute.

3) Add the primary key of the 1-side entity as a foreign key in the table representing the Nside entity.

4)If it has M:N relationship type then create a new relation and include the attributes of Msided primary key and N-sided primary key in that relation(these are foreign keys).

5)For a weak entity, just add the primary key of the owner entity in weak entity relation. Now the new primary key is combined both the partial key and the primary key of owner entity .

…. has taken wicket of…. In…. At…..  named as WICKET .

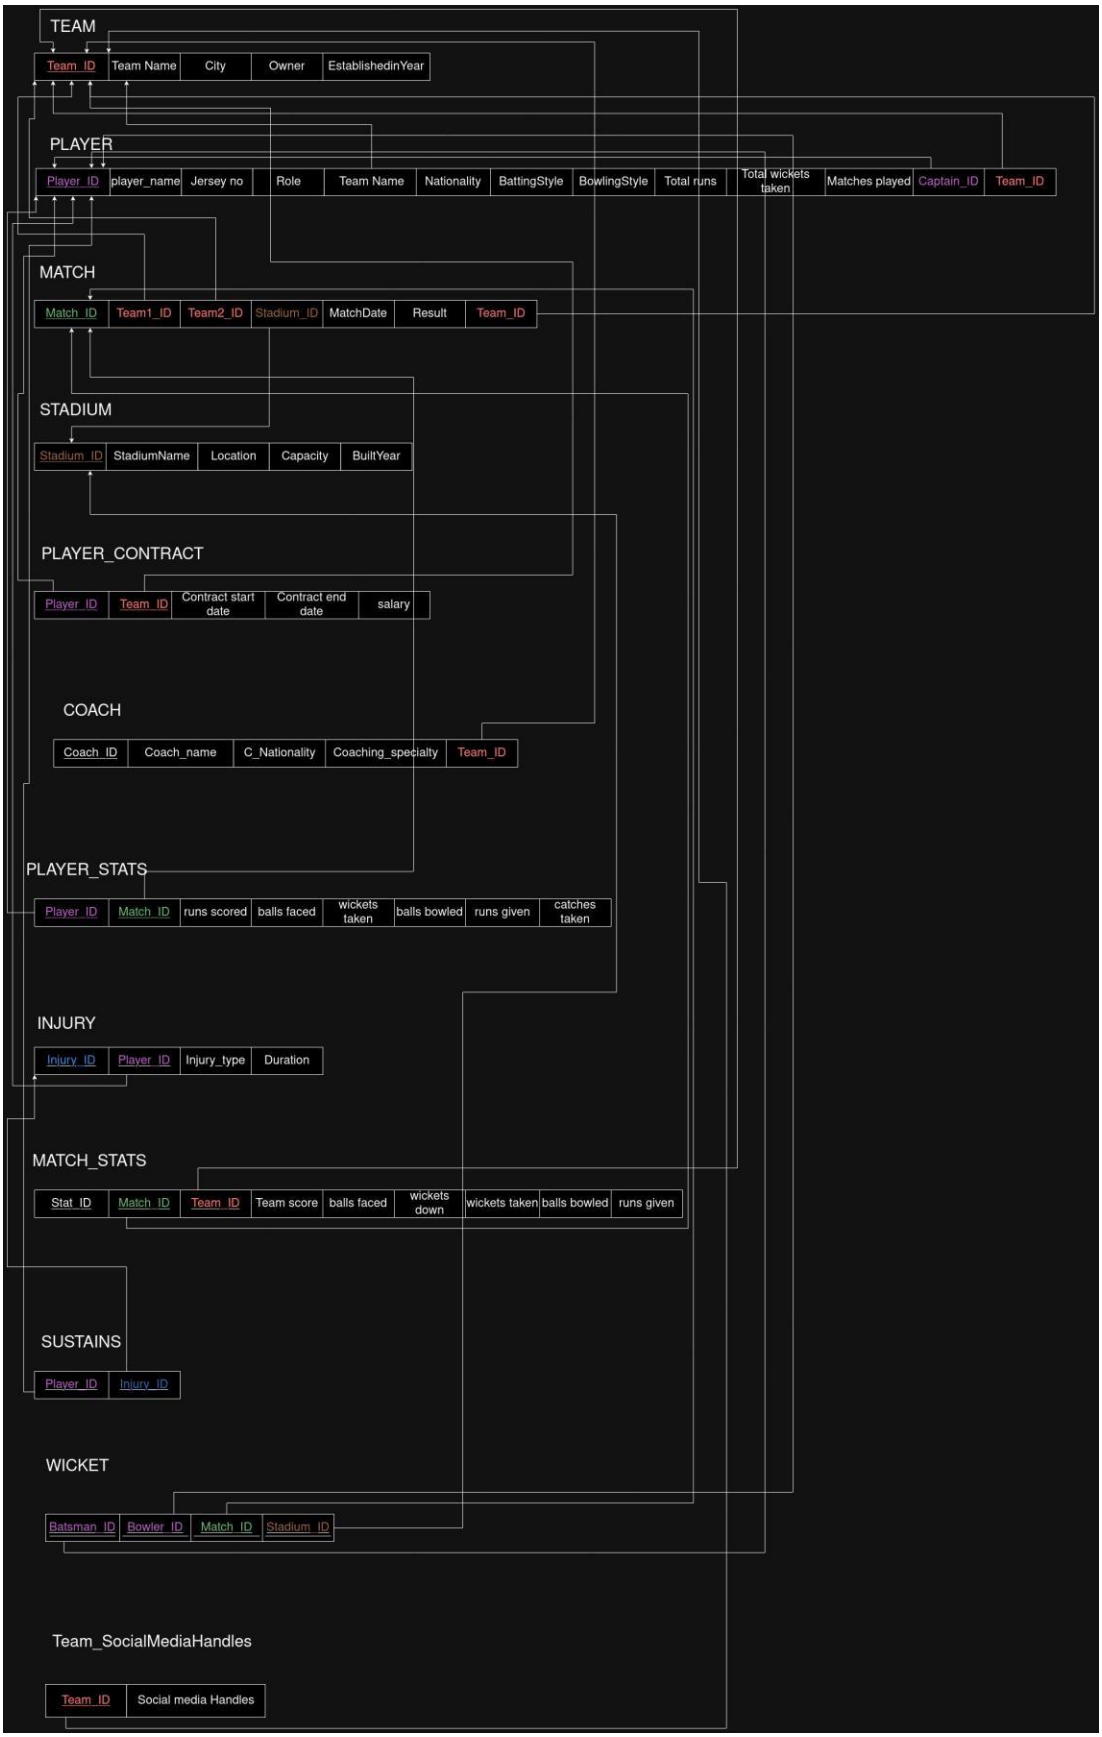
TEAM
Team_ID
Team Name
City
Owner
EstablishedinYear
PLAYER
Player_ID
player_name
Jersey no
Role
Team Name
Nationality
BattingStyle
BowlingStyle
Total runs
Total wickets taken
Matches played
Captain_ID
Team_ID
MATCH
Match_ID
Team1_ID
Team2_ID
Stadium_ID
MatchDate
Result
Team_ID
STADIUM
Stadium_ID
StadiumName
Location
Capacity
BuiltYear
PLAYER_CONTRACT
Player_ID
Team_ID
Contract start date
Contract end date
salary
COACH
Coach_ID
Coach_name
C_Nationality
Coaching_specialty
Team_ID
PLAYER_STATS
Player_ID
Match_ID
runs scored
balls faced
wickets taken
balls bowled
runs given
catches taken
INJURY
Injury_ID
Player_ID
Injury_type
Duration
MATCH_STATS
Stat_ID
Match_ID
Team_ID
Team score
balls faced
wickets down
wickets taken
balls bowled
runs given
SUSTAINS
Player_ID
Injury_ID
WICKET
Batsman_ID
Bowler_ID
Match_ID
Stadium_ID
Team_SocialMediaHandles
Team_ID
Social media Handles

## 1NF:

It is same as relational model.

## 2NF:

### Note:-

In PLAYER_CONTRACT relation contract start date, contract end date and salary depends both on Player_ID, Team_ID

In PLAYER_STATS relation the all attributes (runs scored, balls faced, wickets taken, economy, strikerate, balls bowled, runs given, catches taken) depend both on Player_ID,Match_ID as we are storing stats of a particular player in a particular match.So we are not changing anything.

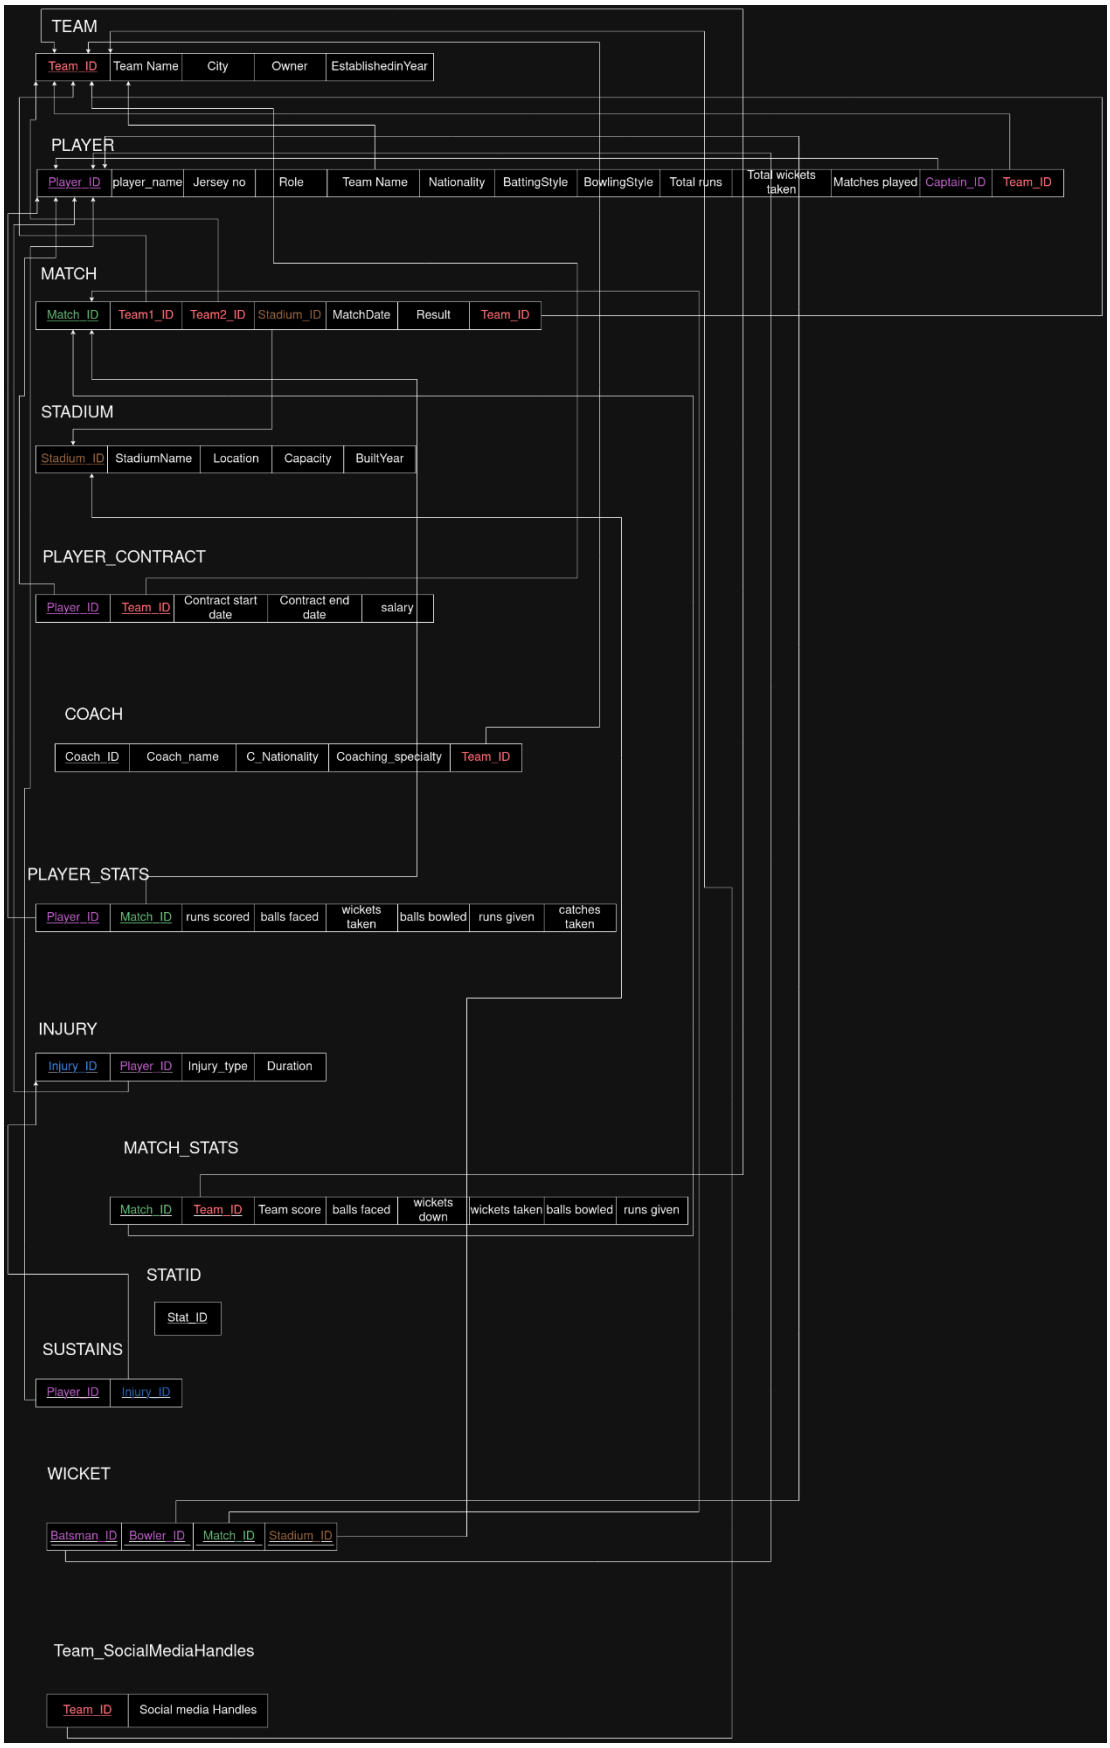
TEAM
Team_ID
Team Name
City
Owner
EstablishedinYear
PLAYER
Player_ID
player_name
Jersey no
Role
Team Name
Nationality
BattingStyle
BowlingStyle
Total runs
Total wickets taken
Matches played
Captain_ID
Team_ID
MATCH
Match_ID
Team1_ID
Team2_ID
Stadium_ID
MatchDate
Result
Team_ID
STADIUM
Stadium_ID
StadiumName
Location
Capacity
BuiltYear
PLAYER_CONTRACT
Player_ID
Team_ID
Contract start date
Contract end date
salary
COACH
Coach_ID
Coach_name
C_Nationality
Coaching_specialty
Team_ID
PLAYER_STATS
Player_ID
Match_ID
runs scored
balls faced
wickets taken
balls bowled
runs given
catches taken
INJURY
Injury_ID
Player_ID
Injury_type
Duration
MATCH_STATS
Match_ID
Team_ID
Team score
balls faced
wickets down
wickets taken
balls bowled
runs given
STATID
Stat_ID
SUSTAINS
Player_ID
Injury_ID
WICKET
Batsman_ID
Bowler_ID
Match_ID
Stadium_ID
Team_SocialMediaHandles
Team_ID
Social media Handles

3NF:

It is same as 2NF . Because there is no transitive dependency in our relational model.