Lab: Creating Clusters


Q1 - Creating a Demo Cluster

Create a cluster with the following configurations:

Setting	Instructions
Cluster name	**Demo Cluster**
Cluster mode	**Signle node**
Runtime version	Select the Databricks runtime version 13.3 LTS
Photon Acceleration	Uncheck the option
Node type	4 cores
Auto termination	30 minutes


1- Navigate to the **Compute** tab in the left side bar.

2- Under **All-purpose compute** tab, click **Create compute**.

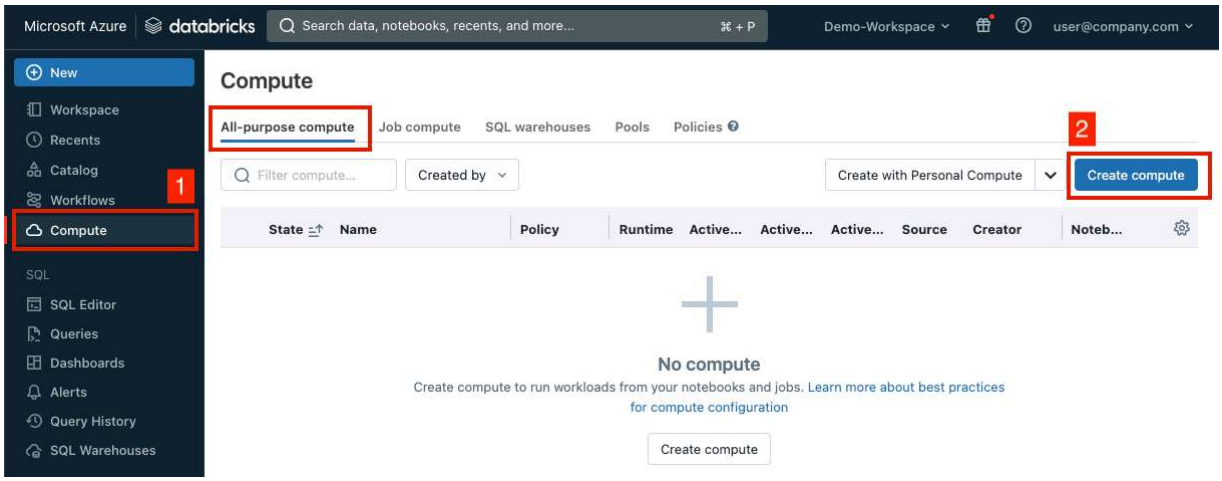

3- On top, click on the default name to change it. Name your cluster as **Demo Cluster**

4- Select **Single node** cluster

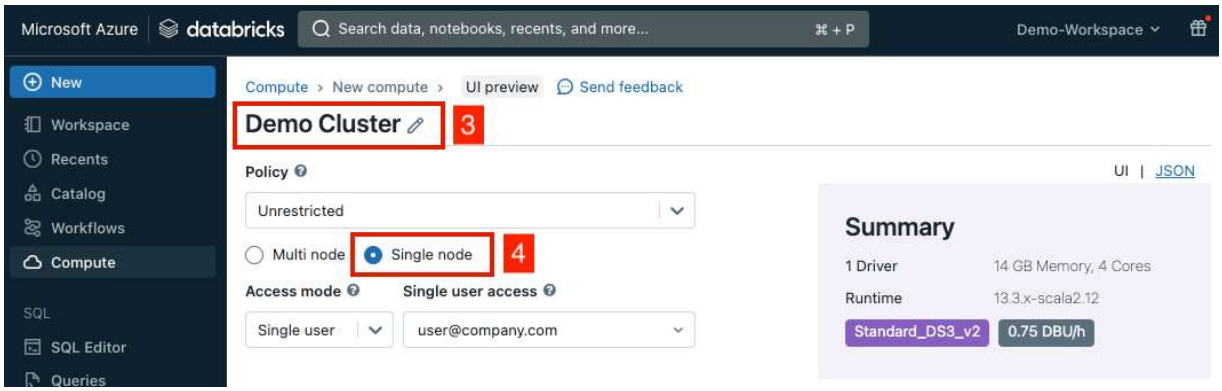


5- Select the Databricks runtime version 13.3 LTS (Long Term Support)

6- Uncheck the option for the **Use Photon Acceleration**

7- Select a Node type of 4 cores

8- Set the auto termination of the cluster to 30 minutes

9- Lastly, click **Create compute**.

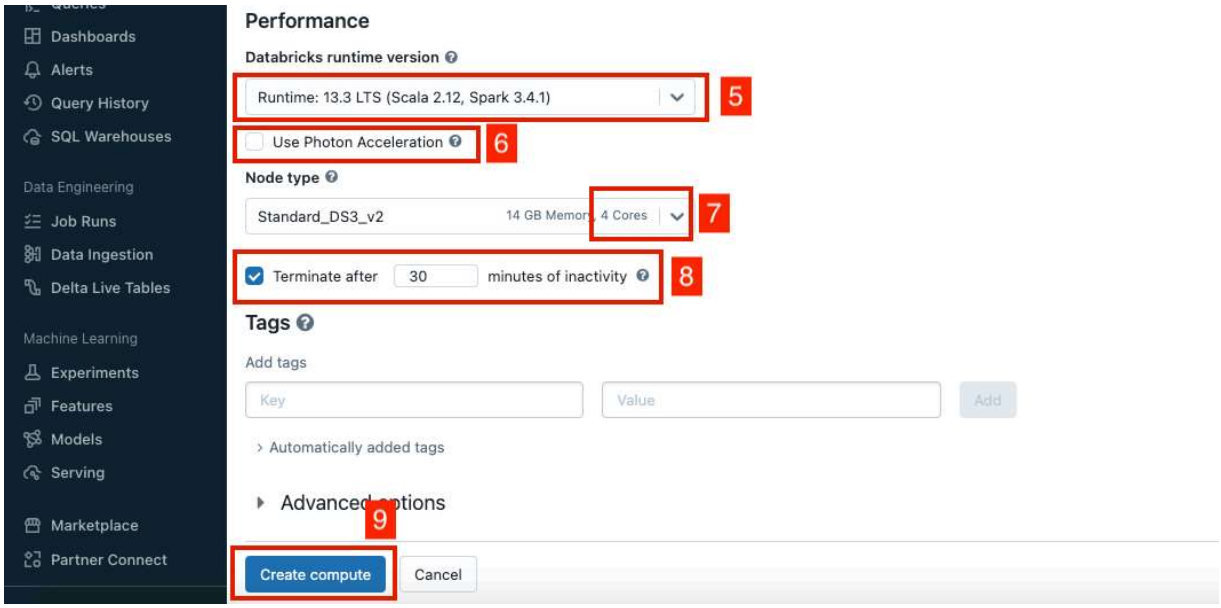
Dashboards
Alerts
Query History
SQL Warehouses
Data Engineering
Job Runs
Data Ingestion
Delta Live Tables
Machine Learning
Experiments
Features
Models
Serving
Marketplace
Partner Connect
Performance
Databricks runtime version
Runtime: 13.3 LTS (Scala 2.12, Spark 3.4.1)
5
Use Photon Acceleration
6
Node type
Standard_DS3_v2
14 GB Memory, 4 Cores
7
Terminate after
30
minutes of inactivity
8
Tags
Add tags
Key
Value
Add
Automatically added tags
Advanced options
9
Create compute
Cancel