

1 Written Questions [25pts]

Answer the following questions in the HW2 solutions template provided. DO NOT show your work. Then upload your solutions to Gradescope.

1.1 Warm-up

First, let's think a little bit about decision trees. The following dataset consists of 7 examples, each with 3 attributes, (A, B, C) , and a label, Y .

A	B	C	Y
1	1	0	0
1	1	2	1
1	0	0	1
1	1	2	1
0	0	2	0
0	1	1	0
0	0	0	0

Use the data above to answer the following questions.

A few important notes:

- *All calculations should be done without rounding!* After you have finished all of your calculations, write your rounded solutions in the boxes below.
- Note that, throughout this homework, we will use the convention that the leaves of the trees do not count as nodes, and as such are not included in calculations of depth and number of splits. (For example, a tree which classifies the data based on the value of a single attribute will have depth 1, and contain 1 split.)

1. [1pt] What is the entropy of Y in bits, $H(Y)$? In this and subsequent questions, when we request the units in *bits*, this simply means that you need to use log base 2 in your calculations.¹ (Please include one number rounded to the fourth decimal place, e.g. 0.1234)

0.9852

2. [1pt] What is the mutual information² of Y and A in bits, $I(Y; A)$? (Please include one number rounded to the fourth decimal place, e.g. 0.1234)

0.5216

¹If instead you used log base e , the units would be *nats*; log base 10 gives *bats*.

²In the context of decision trees, and therefore in this assignment, the terms “information gain” and “mutual information” are synonymous (e.g. they have the same meaning as one another). However, in information theory and machine learning in general, “information gain” is synonymous with “Kullback-Leibler (K-L) divergence”, often referred to as relative entropy, which is not the same as mutual information. For more information, go [here](#).

3. [1pt] What is the mutual information of Y and B in bits, $I(Y; B)$? (Please include one number rounded to the fourth decimal place, e.g. 0.1234)

0.0202

4. [1pt] What is the mutual information of Y and C in bits, $I(Y; C)$? (Please include one number rounded to the fourth decimal place, e.g. 0.1234)

0.1981

5. [1pt] Consider the dataset given above. Which attribute (A , B , or C) would a decision tree algorithm pick first to branch on, if its splitting criterion is mutual information?

Select one:

☒ A

☐ B

☐ C

6. [1pt] Consider the dataset given above. Which is the second attribute you would pick to branch on, if its splitting criterion is mutual information? (*Hint*: Notice that this question correctly presupposes that there is *exactly one* second attribute.)

Select one:

☐ A

☐ B


☒ C

7. [1pt] If the same algorithm continues until the tree perfectly classifies the data, what would the depth of the tree be?

3

8. [4pt] Draw your completed Decision Tree. Label the non-leaf nodes with which attribute the tree will split on (e.g. B), the edges with the value of the attribute (e.g. 1 or 0), and the leaf nodes with the classification decision (e.g. $Y = 0$).

Solution

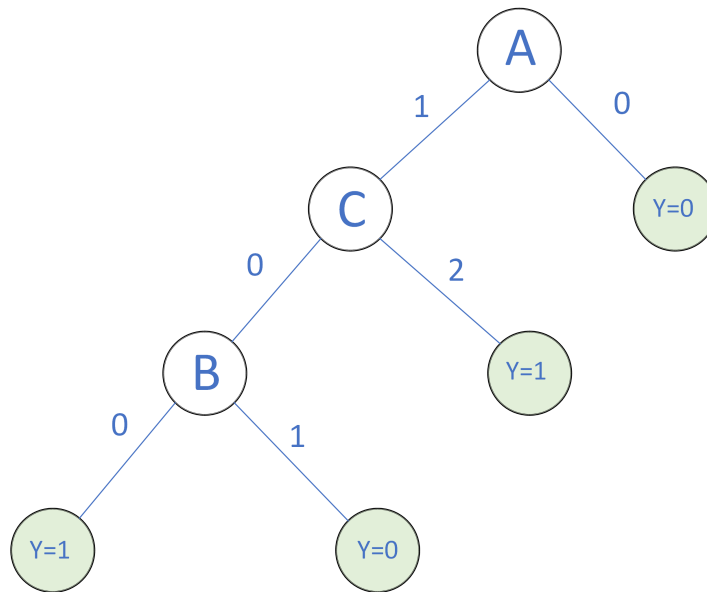

Note: There is no training data for $A=1$ and $C=1$, hence decision tree did not learn the node for this data. But when we encounter this data combination ($A=1$ and $C=1$) in test data, we either predict the label value randomly or use max vote classifier.

1.2 Empirical Questions


The following questions should be completed as you work through the programming portion of this assignment (Section ??).

9. [2pt] Train and test your decision tree on the politician dataset and the education dataset with four different values of max-depth, $\{0, 1, 2, 4\}$. Report your findings in the HW2 solutions template provided. A Decision Tree with max-depth 0 is simply a *majority vote classifier*; a Decision Tree with max-depth 1 is called a *decision stump*. If desired, you could even check that your answers for these two simple cases are correct using your favorite spreadsheet application (e.g. Excel, Google Sheets). (Please round each number to the fourth decimal place, e.g. 0.1234)

Dataset	Max-Depth	Train Error	Test Error
politician	0	0.4430	0.5060
politician	1	0.2013	0.2169
politician	2	0.1342	0.1566
politician	4	0.1074	0.2048
education	0	0.325	0.31
education	1	0.195	0.23
education	2	0.195	0.23
education	4	0.13	0.16

10. [3pt] For the politicians dataset, create a computer-generated plot showing error on the y-axis against depth of the tree on the x-axis. Plot *both* training error and testing error, clearly labeling which is which. That is, for each possible value of max-depth (0, 1, 2, ..., up to the number of attributes in the dataset), you should train a decision tree and report train/test error of the model's predictions.

Solution

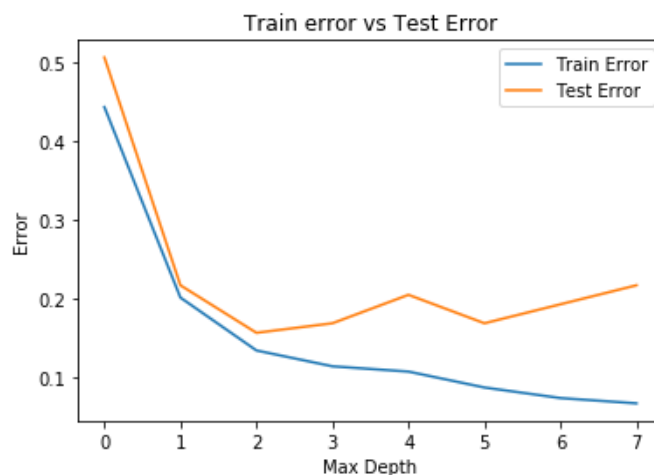

11. **[2pt]** Suppose your research advisor asks you to run some model selection experiments and then report your results. You select the Decision Tree model's max-depth to be the one with lowest test error in metrics.txt and then report that model's test error as the performance of our classifier on held out test data. Is this a good experimental setup? If so, why? If not, why not?

Solution

No it is not a good experimental setup. It is not the right approach to use test data to choose the right model. Because in real world scenario, test data will not be available while building machine learning model

12. **[2pt]** In this assignment, we used max-depth as our stopping criterion, and as a mechanism to prevent overfitting. Alternatively, we could stop splitting a node whenever the mutual information for the best attribute is lower than a threshold value. This threshold would be another hyperparameter. Theoretically, how would increasing this threshold value affect the number of nodes and depth of the learned trees?

Solution

Increasing this threshold value will theoretically reduce the number of nodes and depth of the learned trees

13. [2pt] From question 12, how would you set-up model training to choose the threshold value?

Solution

We can set up a N-Fold cross validation to choose the best threshold value.

For example: - Lets say we are using 4- fold validation. In this case follow below steps:

1. Divide train data into 4 parts. P1, P2, P3,P4
2. In each of the 4 folds:
 - a. use one part of data as test data and remaining 3 parts as train data
 - b. Vary the threshold value and determine the test and train error for each threshold value
 - c. The threshold value which gives minimum validation/test error is chosen as the best threshold value
3. Once we get 4 threshold values(one for each fold), get the average of the 4 values to choose the final threshold value

14. [3pt] Print (do not handwrite!) the decision tree which is produced by your algorithm for the politician data with max depth 3. Instructions on how to print the tree could be found in section ??.

Solution

```
C:\Users\cheth\OneDrive\Documents\MachineLearning\Assignment2\h
pol_train.labels pol_test.labels pol_3_metrics.txt
[66 republican/83 democrat]
| Superfund_right_to_sue=y: [64 republican/28 democrat]
| | Aid_to_nicaraguan_contras=y: [6 republican/15 democrat]
| | | Mx_missile=y: [6 republican/3 democrat]
| | | Mx_missile=n: [0 republican/12 democrat]
| | | Aid_to_nicaraguan_contras=n: [58 republican/13 democrat]
| | | Export_south_africa=y: [38 republican/13 democrat]
| | | Export_south_africa=n: [20 republican/0 democrat]
| | Superfund_right_to_sue=n: [2 republican/55 democrat]
| | | Export_south_africa=y: [1 republican/55 democrat]
| | | Immigration=y: [1 republican/9 democrat]
| | | Immigration=n: [0 republican/46 democrat]
| | | Export_south_africa=n: [1 republican/0 democrat]
```

15. After you have completed all other components of this assignment, report your answers to the collaboration policy questions detailed in the Academic Integrity Policies found [here](#). (a) Did you receive any help whatsoever from anyone in solving this assignment? Is so, include full details. (b) Did you give any help whatsoever to anyone in solving this assignment? Is so, include full details. (c) Did you find or come across code that implements any part of this assignment ? If so, include full details.

Solution