

SEMANTIC HTML WEB PAGES AND TAILWINDCSS SETUP



Arranged by:

Made Premadharma Yogananda (2415101056)

Computer Science Study Program

Department of Informatics Engineering


Faculty of Engineering and Vocational Studies

Universitas Pendidikan Ganesha


2026

1) Semantic HTML Web Pages and CSS Styling

Create directory with the following structure

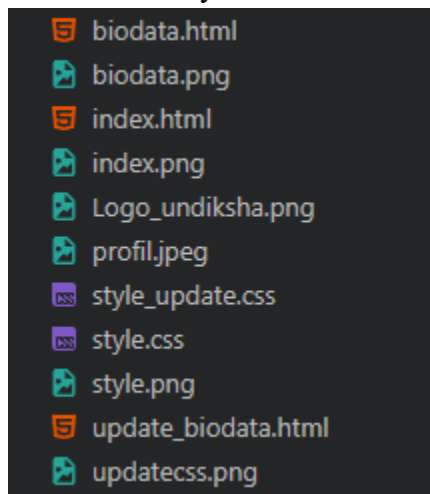

Here is the first website : biodata.html and style.css

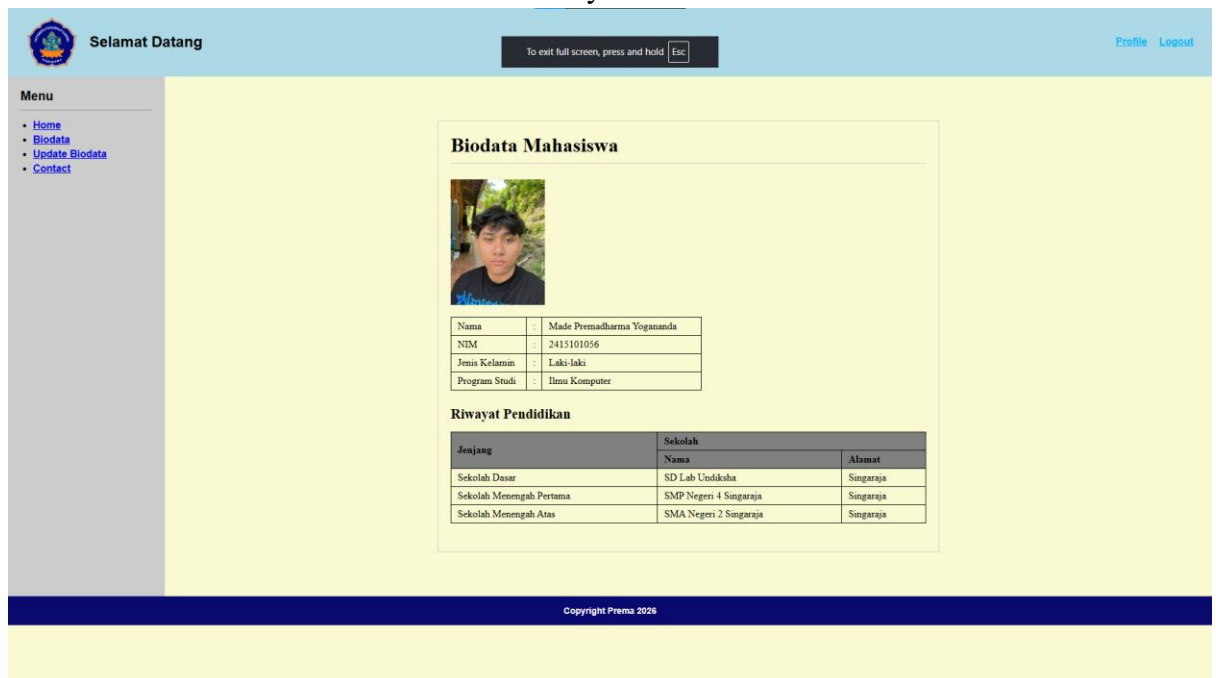

```

<!DOCTYPE html>
<html lang="id">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Biodata Mahasiswa</title>
  <link rel="stylesheet" href="style.css">
</head>
<body>

  <header>
    <div class="header-kiri">
      
      <h1>Selamat Datang</h1>
    </div>
    <div class="header-kanan">
      <a href="index.html">Profile</a>
      <a href="#">Logout</a>
    </div>
  </header>

  <div class="container">
    <aside class="sidebar">
      <h2>Menu</h2>
      <hr>
      <ul>
        <li><a href="#">Home</a></li>
        <li><a href="biodata.html">Biodata</a></li>
        <li><a href="update_biodata.html">Update Biodata</a></li>
        <li><a href="#">Contact</a></li>
      </ul>
    </aside>

    <main class="content">
      <div class="biodata-container">
        <h1>Biodata Mahasiswa</h1>
        <hr>

        <table class="tabel-biodata">
          <tr>
            <td>Nama</td>
            <td>:</td>
            <td>Made Premadharna Yogananda</td>
          </tr>
          <tr>
            <td>NIM</td>
            <td>:</td>
            <td>2415101056</td>
          </tr>
          <tr>
            <td>Jenis Kelamin</td>
            <td>:</td>
            <td>Laki-laki</td>
          </tr>
          <tr>
            <td>Program Studi</td>
            <td>:</td>
            <td>Ilmu Komputer</td>
          </tr>
        </table>

        <h2>Riwayat Pendidikan</h2>

        <table class="tabel-pendidikan">
          <thead>
            <tr>
              <th rowspan="2">Jenang</th>
              <th colspan="2">Sekolah</th>
            </tr>
            <tr>
              <th>Nama</th>
              <th>Alamat</th>
            </tr>
          </thead>
          <tbody>
            <tr>
              <td>Sekolah Dasar</td>
              <td>SD Lab Undiksha</td>
              <td>Singaraja</td>
            </tr>
            <tr>
              <td>Sekolah Menengah Pertama</td>
              <td>SMP Negeri 4 Singaraja</td>
              <td>Singaraja</td>
            </tr>
            <tr>
              <td>Sekolah Menengah Atas</td>
              <td>SMA Negeri 2 Singaraja</td>
              <td>Singaraja</td>
            </tr>
          </tbody>
        </table>
      </div>
    </main>
  </div>

  <Footer>
    <p>Copyright Prema 2026</p>
  </Footer>

</body>
</html>

```

[illegible]

And this is the second website: update_biodata.html and the style.css

 Selamat Datang [Profile](#) [Logout](#)

Menu

- [Home](#)
- [Biodata](#)
- [Update Biodata](#)
- [Contact](#)

Update Biodata Mahasiswa

Nama :

Password :

Jenis Kelamin : ☐ Laki-laki ☐ Perempuan

Hobi : ☐ Memasak ☐ Olahraga ☐ Bermain

Asal Kota :

Deskripsi :

Copyright Prema 2026

```

</DOCTYPE html>
<html lang="id">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Update Biodata Mahasiswa</title>
  <link rel="stylesheet" href="style_update.css">
</head>
<body>

  <header>
    <div class="header-kiri">
      
      <h1>Selamat Datang</h1>
    </div>
    <div class="header-kanan">
      <a href="#">Profile</a>
      <a href="#">Logout</a>
    </div>
  </header>

  <div class="container">
    <aside class="sidebar">
      <h2>Menu</h2>
      <hr>
      <ul>
        <li><a href="index.html">Home</a></li>
        <li><a href="latihan_1.html">Biodata</a></li>
        <li><a href="update_biodata.html">Update Biodata</a></li>
        <li><a href="#">Contact</a></li>
      </ul>
    </aside>

    <main class="content">
      <h2>Update Biodata Mahasiswa</h2>
      <hr>

      <form action="#" method="POST">
        <table class="tabel-form">
          <tr>
            <td><label for="nama">Nama</label></td>
            <td></td>
            <td><input type="text" id="nama" placeholder="Tuliskan nama Anda"></td>
          </tr>
          <tr>
            <td><label for="password">Password</label></td>
            <td></td>
            <td><input type="password" id="password" placeholder="Tuliskan password Anda"></td>
          </tr>
          <tr>
            <td><label for="jenis_kelamin">Jenis Kelamin</label></td>
            <td></td>
            <td>
              <input type="radio" name="jk" id="laki" value="Laki-laki"> <label for="laki">Laki-laki</label>
              <input type="radio" name="jk" id="perempuan" value="Perempuan"> <label for="perempuan">Perempuan</label>
            </td>
          </tr>
          <tr>
            <td><label for="hobi">Hobi</label></td>
            <td></td>
            <td>
              <input type="checkbox" id="hobi1" value="Membaca"> <label for="hobi1">Membaca</label>
              <input type="checkbox" id="hobi2" value="Menulis"> <label for="hobi2">Menulis</label>
              <input type="checkbox" id="hobi3" value="Olahraga"> <label for="hobi3">Olahraga</label>
              <input type="checkbox" id="hobi4" value="Bermain"> <label for="hobi4">Bermain</label>
            </td>
          </tr>
          <tr>
            <td><label for="kota">Asal Kota</label></td>
            <td></td>
            <td>
              <select id="kota">
                <option value="Singaraja">Singaraja</option>
                <option value="Denpasar">Denpasar</option>
              </select>
            </td>
          </tr>
          <tr>
            <td colspan="3"><label for="komentar">Deskripsi</label></td>
          </tr>
          <tr>
            <td colspan="3"><input type="text" id="komentar" rows="4" cols="35"></td>
          </tr>
        </table>
      </form>
    </main>
  </div>

  <footer>
    <p>Copyright Prema 2026</p>
  </footer>
</body>
</html>

```

[illegible]

2) Composer Installation

Windows Installer: <https://getcomposer.org/download/>

Version: Latest v2.10.3


The image displays a series of seven screenshots from the Composer Setup Windows installer, arranged in a grid. Each window has a title bar that says "Composer Setup" and a small cartoon character icon in the top right corner.

- Select Setup Install Mode:** The first window shows the "Select install mode" screen. It explains that Composer can be installed for all users (requiring administrative privileges) or for the current user only. The "Install for all users (recommended)" option is highlighted with a blue box. A "Cancel" button is at the bottom right.
- Installation Options:** The second window shows the "Installation Options" screen. It states that the setup will install Composer to a fixed location for all users, which includes a Control Panel uninstaller. There is a checkbox for "Developer mode" which is currently unchecked. "Next" and "Cancel" buttons are at the bottom right.
- Select Destination Location:** The third window shows the "Select Destination Location" screen. It asks where Composer should be installed. A text box contains "C:\composer" and a "Browse..." button is next to it. "Back", "Next", and "Cancel" buttons are at the bottom.
- Settings Check:** The fourth window shows the "Settings Check" screen. It asks for the command-line PHP to use, with a dropdown menu showing "C:\xampp\php\php.exe" and a "Browse..." button. There is also a checkbox for "Add this PHP to your path?". "Back", "Next", and "Cancel" buttons are at the bottom.
- Proxy Settings:** The fifth window shows the "Proxy Settings" screen. It asks if a proxy server should be used to connect to the internet. There is a checkbox for "Use a proxy server to connect to internet" which is unchecked, and a text box for "Enter proxy url". "Back", "Next", and "Cancel" buttons are at the bottom.
- Ready to Install:** The sixth window shows the "Ready to Install" screen. It summarizes the settings: Destination location (C:\composer), PHP version (8.2.12), Proxy (none), Add to System path (C:\xampp\php), and Add to System path (C:\composer). "Back", "Install", and "Cancel" buttons are at the bottom.
- Completing Composer Setup:** The seventh window shows the "Completing Composer Setup" screen. It informs the user that Composer is installed and provides usage instructions: "Open a command window and type 'composer'". It also has a checkbox for "View online documentation". A cartoon character is shown on the left. "Back" and "Finish" buttons are at the bottom.

3) NodeJS Installation

Windows Installer: <https://nodejs.org/dist/v26.8.2/node-v26.8.2-x64.msi>

Version: v26.8.2

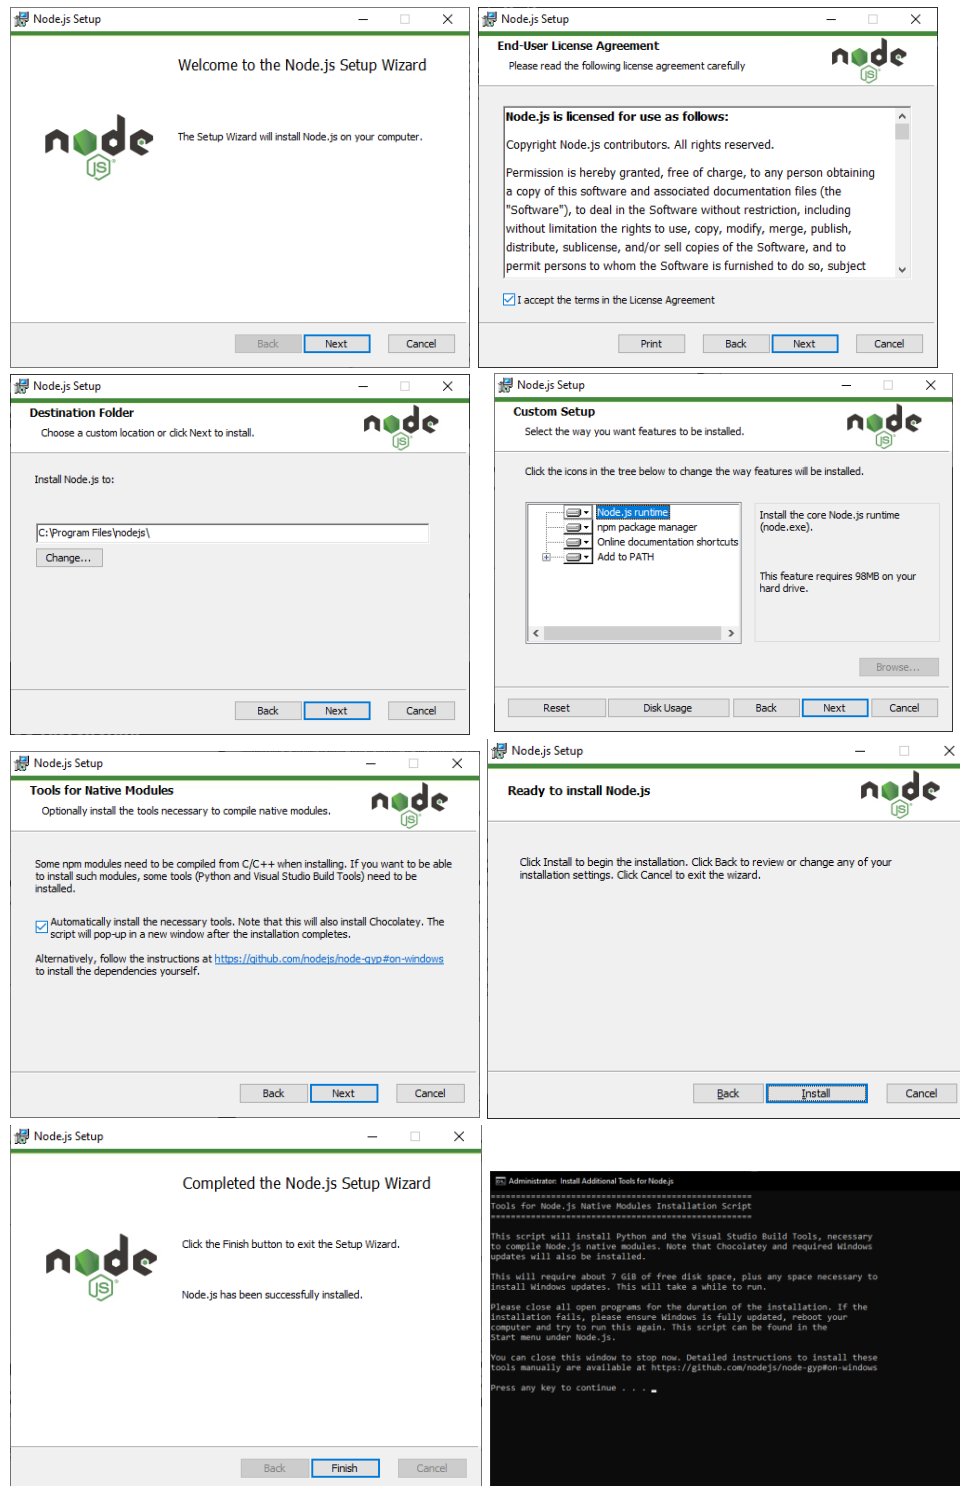

4) TailwindCSS Installation

CLI Installer: <https://tailwindcss.com/docs/installation/tailwind-cli>

Installation Process:

1. Npm init

```
Administrator: C:\Windows\System32\cmd.exe
Microsoft Windows [Version 10.0.19045.6036]
(c) Microsoft Corporation. All rights reserved.

D:\Kampus\tekweb\tailwind>npm init -y
Wrote to D:\Kampus\tekweb\tailwind\package.json:

{
  "name": "tailwind",
  "version": "1.0.0",
  "description": "",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "keywords": [],
  "author": "",
  "license": "ISC",
  "type": "commonjs"
}

D:\Kampus\tekweb\tailwind>
```

2. Tailwind installation

```
D:\Kampus\tekweb\tailwind>npm install tailwindcss @tailwindcss/cli

added 33 packages, and audited 34 packages in 2s

6 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities
npm warn install-scripts 1 package has install scripts not yet covered by allowScripts:
npm warn install-scripts @parcel/watcher@2.5.1 (install: node scripts/build-from-source.js)
npm warn install-scripts
npm warn install-scripts Run `npm install-scripts ls` to review, or `npm install-scripts approve <pkg>` to allow.
```

3. Create *src/input.css* and *src/index.html* file

```
src
├── index.html
└── input.css

src > input.css
1  @import "tailwindcss";
```

4. executing the @tailwindcss/cli

```
Administrator: C:\Windows\system32\cmd.exe
Microsoft Windows [Version 10.0.19045.6036]
(c) Microsoft Corporation. All rights reserved.


D:\Kampus\tekweb\tailwind>npx @tailwindcss/cli -i ./src/input.css -o ./src/output.css --watch
s tailwindcss v4.3.3

Done in 47ms
```

5. create the index.html

```
src > index.html > html
1  <!doctype html>
2  <html>
3  <head>
4    <meta charset="UTF-8">
5    <meta name="viewport" content="width=device-width, initial-scale=1.0">
6    <link href="./output.css" rel="stylesheet">
7  </head>
8  <body>
9    <h1 class="text-3xl font-bold underline">
10     Hello world!
11   </h1>
12 </body>
13 </html>
```

6. run the website using live server plugin

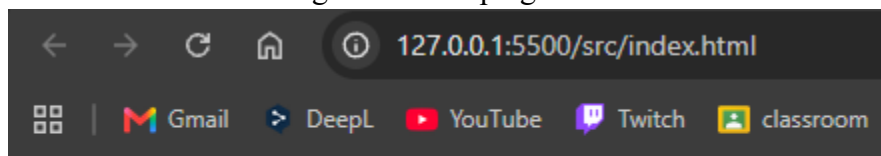

Hello world!