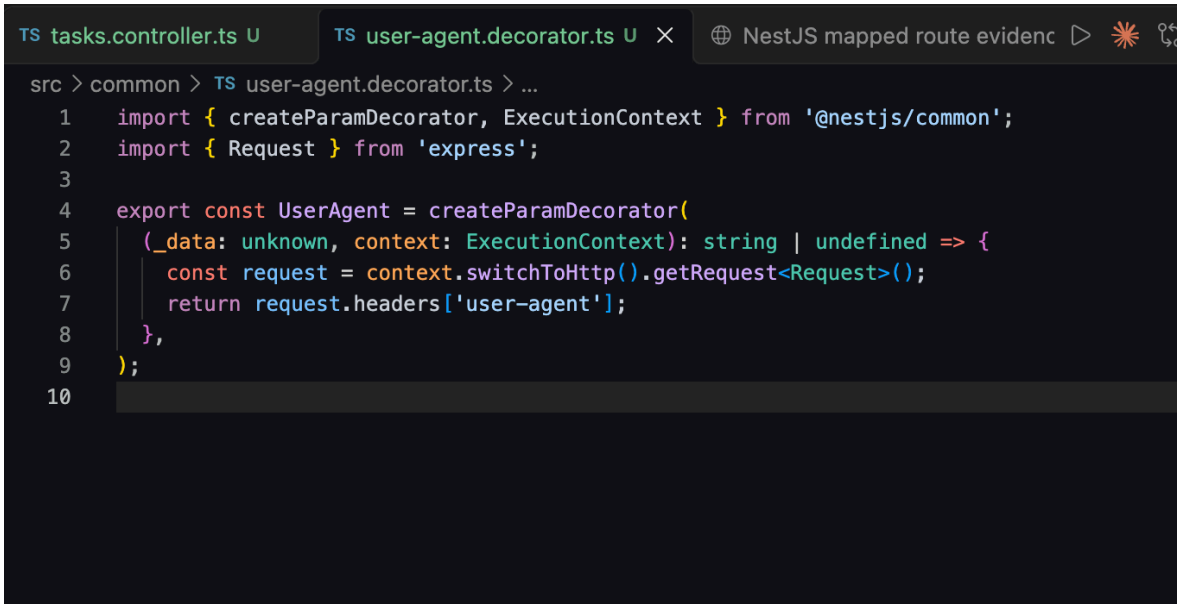


Routes mapped by `npm run start:dev`

Runtime output and the decorators that register each route:


Runtime log line	Creating decorators
`Mapped {/, GET} route`	`AppController @Get()`
`Mapped {/tasks, GET} route`	`@Controller('tasks') + @Get()`
`Mapped {/tasks/done, GET} route`	`@Controller('tasks') + @Get('done')`
`Mapped {/tasks/todo, GET} route`	`@Controller('tasks') + @Get('todo')`
`Mapped {/tasks/welcome, GET} route`	`@Controller('tasks') + @Get('welcome')`
`Mapped {/tasks/agent, GET} route`	`@Controller('tasks') + @Get('agent')`
`Mapped {/tasks/:id, GET} route`	`@Controller('tasks') + @Get(':id')`

Captured from NestJS startup output at 4:29:45 PM on October 21, 2026.

http://localhost:3000/tasks/agent Sharing with Agent

Pretty-print


```
{
  "agent": "Mozilla/5.0 (Windows NT 10.0; Win64; x64; rv:132.0) Gecko/20100101
Firefox/132.0"
}
```

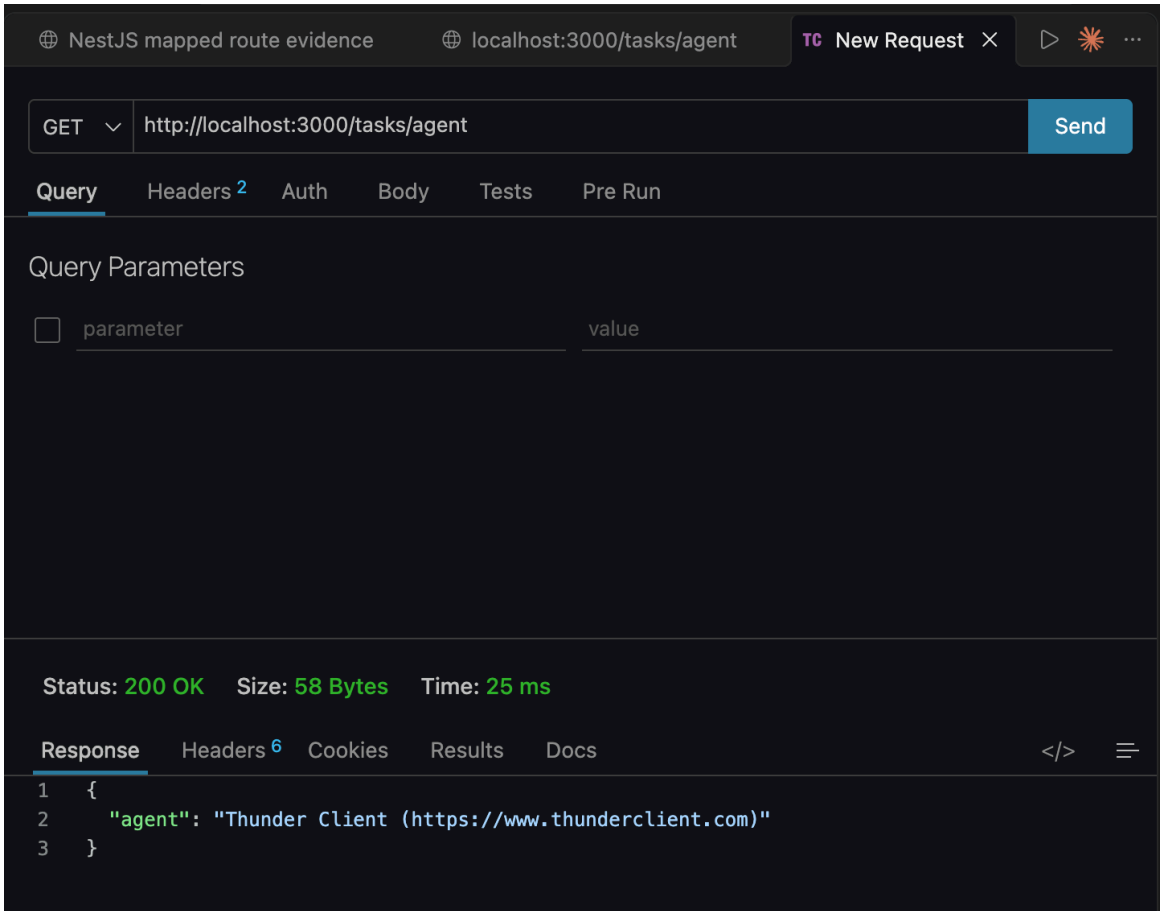How it works:

NestJS reads the @Get('agent') and @UserAgent() decorator metadata while setting up the route. When a request arrives, the custom decorator gets the HTTP request from the execution context and extracts its User-Agent header. Nest passes that value to whoIsAsking as agent.