


Db2 for i inside of VS Code

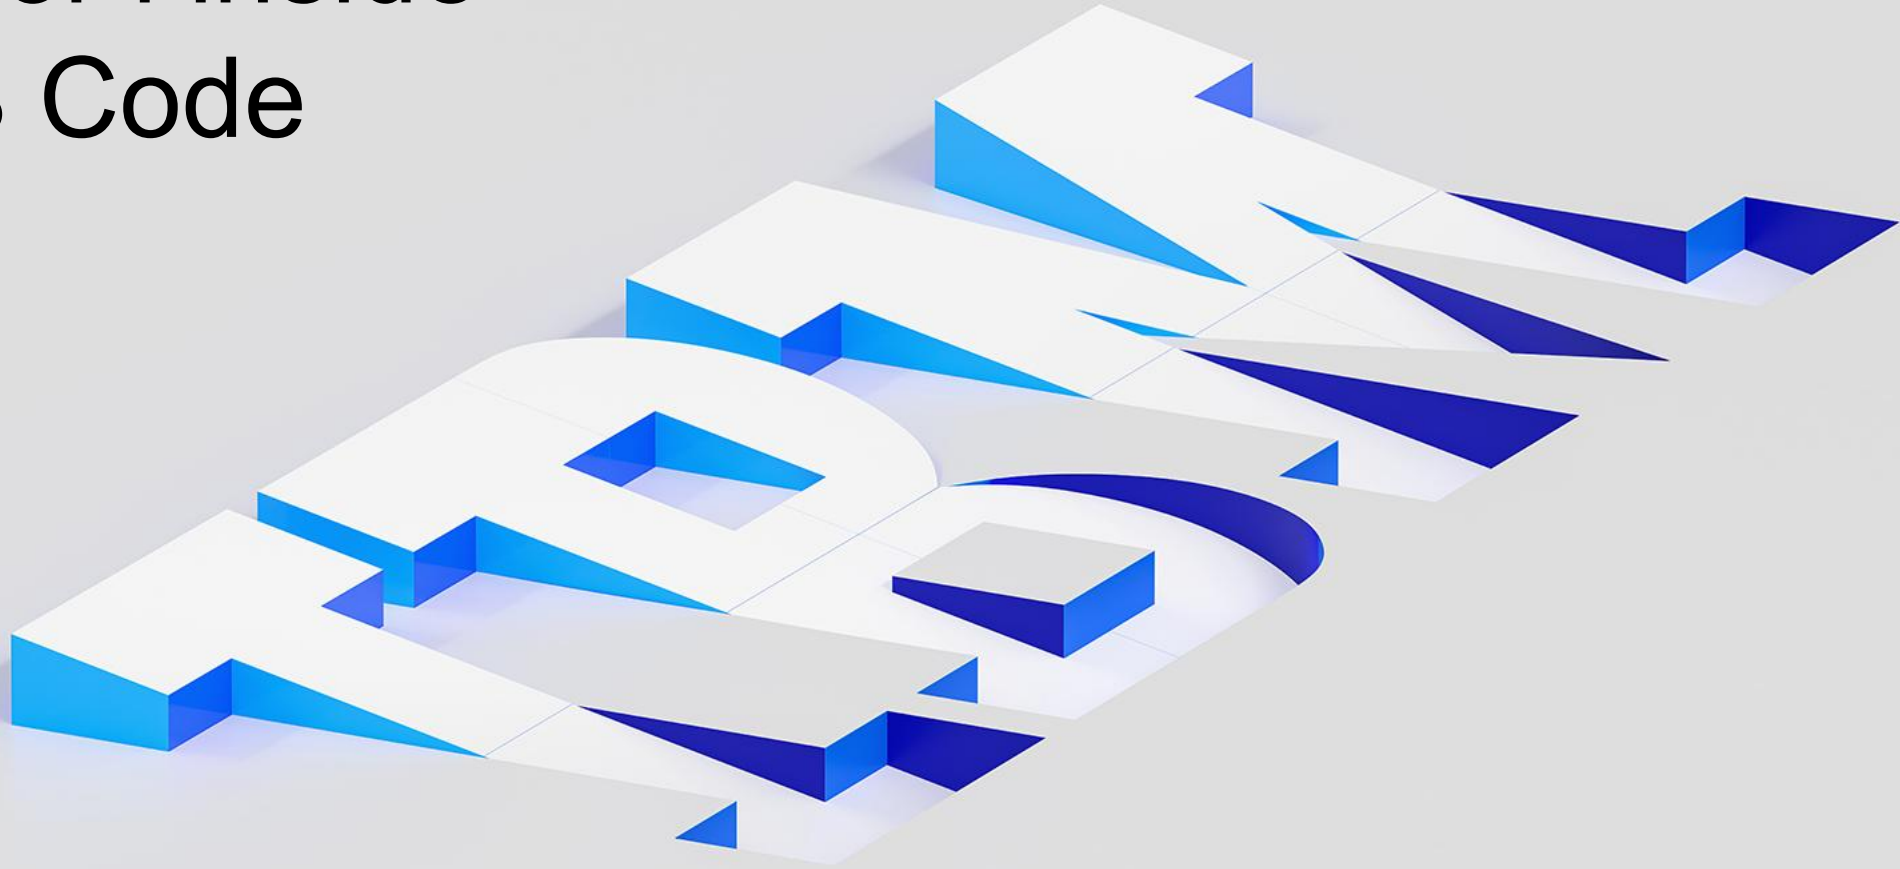

Scott Forstie

Db2 for i Business Architect

forstie@us.ibm.com

Sanjula Ganepola

Software Developer – IBM i App Dev & AI Toolchain

Sanjula.Ganepola@ibm.com

© Copyright IBM Corporation 2025

2025 October

IBM i

The VS Code Ecosystem



Code for IBM i pre-release
Code4i | 60,020 | ★★★★★ (23)
Maintain your RPGLE, CL, COBOL, C/CPP on IBM i right from Visual Studio Code.

[Update to v2.17.2](#) [Disable](#) [Uninstall](#) ☐ Auto Update

Code for IBM i



Connect to IBM i
Write RPG, CL, and more
Browse QSYS and IFS
Compile source

<https://marketplace.visualstudio.com/items?itemName=HalcyonTechLtd.code-for-ibmi>



Db2 for IBM i
Code4i | 35,978 | ★★★★★ (7)
Db2 for IBM i tools in VS Code

[Update to v1.15.1](#) [Disable](#) [Uninstall](#) ☐ Auto Update

Db2 for IBM i



Write and run SQL statements
View database objects (schema browser)
Visual Explain
SQL Error Logging Facility
Notebooks

<https://marketplace.visualstudio.com/items?itemName=HalcyonTechLtd.vscod-db2i>

How to Acquire and Use Code for IBM i & Db2 for IBM i



iSee VsCode Db2 for i Style

Contains 1 Component(s)

Overview

Speaker(s)



In the previous iSee we learned the basics on how to use and install VsCode for your IBM i development needs. In this session we will venture down a path near and dear (wonderful creature that likes to run out in front of your cars) to Scott, creating SQL for IBM i. This includes accessing databases, as well as getting the most out of your IBM i Services leveraging SQL. We will show you the power of this Db2 support that the Code for i team has been working on. Buckle up!

More Information

iSee Using VsCode with Code for i

Contains 1 Component(s)

Overview

Speaker(s)



Developing code on IBM i is key for many companies, Either business applications or even programs for helping with managing the system. The interface for developing those programs needs to be considered. I know too many that are still using the green screen SEU line editor as their primary interface. Its time to move on... forward...step out of 1984 (yea.. I know the hair styles were something back then...) and into 2024. VsCode is an amazing interface for building and creating programs for IBM i. Complete with the amazing Code for i plugins, everything you need for developing programs on IBM i is there. Learn how to install, and some basic how to use steps in this iSee.

<https://learn.common.org/products/ibm-isee-video-blog>

Keeping Current



Sep 9

SanjulaGanepola

1.15.1

cdcf5d3

Compare ▼

vscode-db2i 1.15.1 Latest

What's Changed


- Fix view contents button when no active editor by [@SanjulaGanepola](#) in [#446](#)
- Bump to v1.15.1 by [@SanjulaGanepola](#) in [#447](#)

Full Changelog: [1.15.0...1.15.1](#)

Contributors

SanjulaGanepola


<https://github.com/codefori/vscode-db2i/releases>

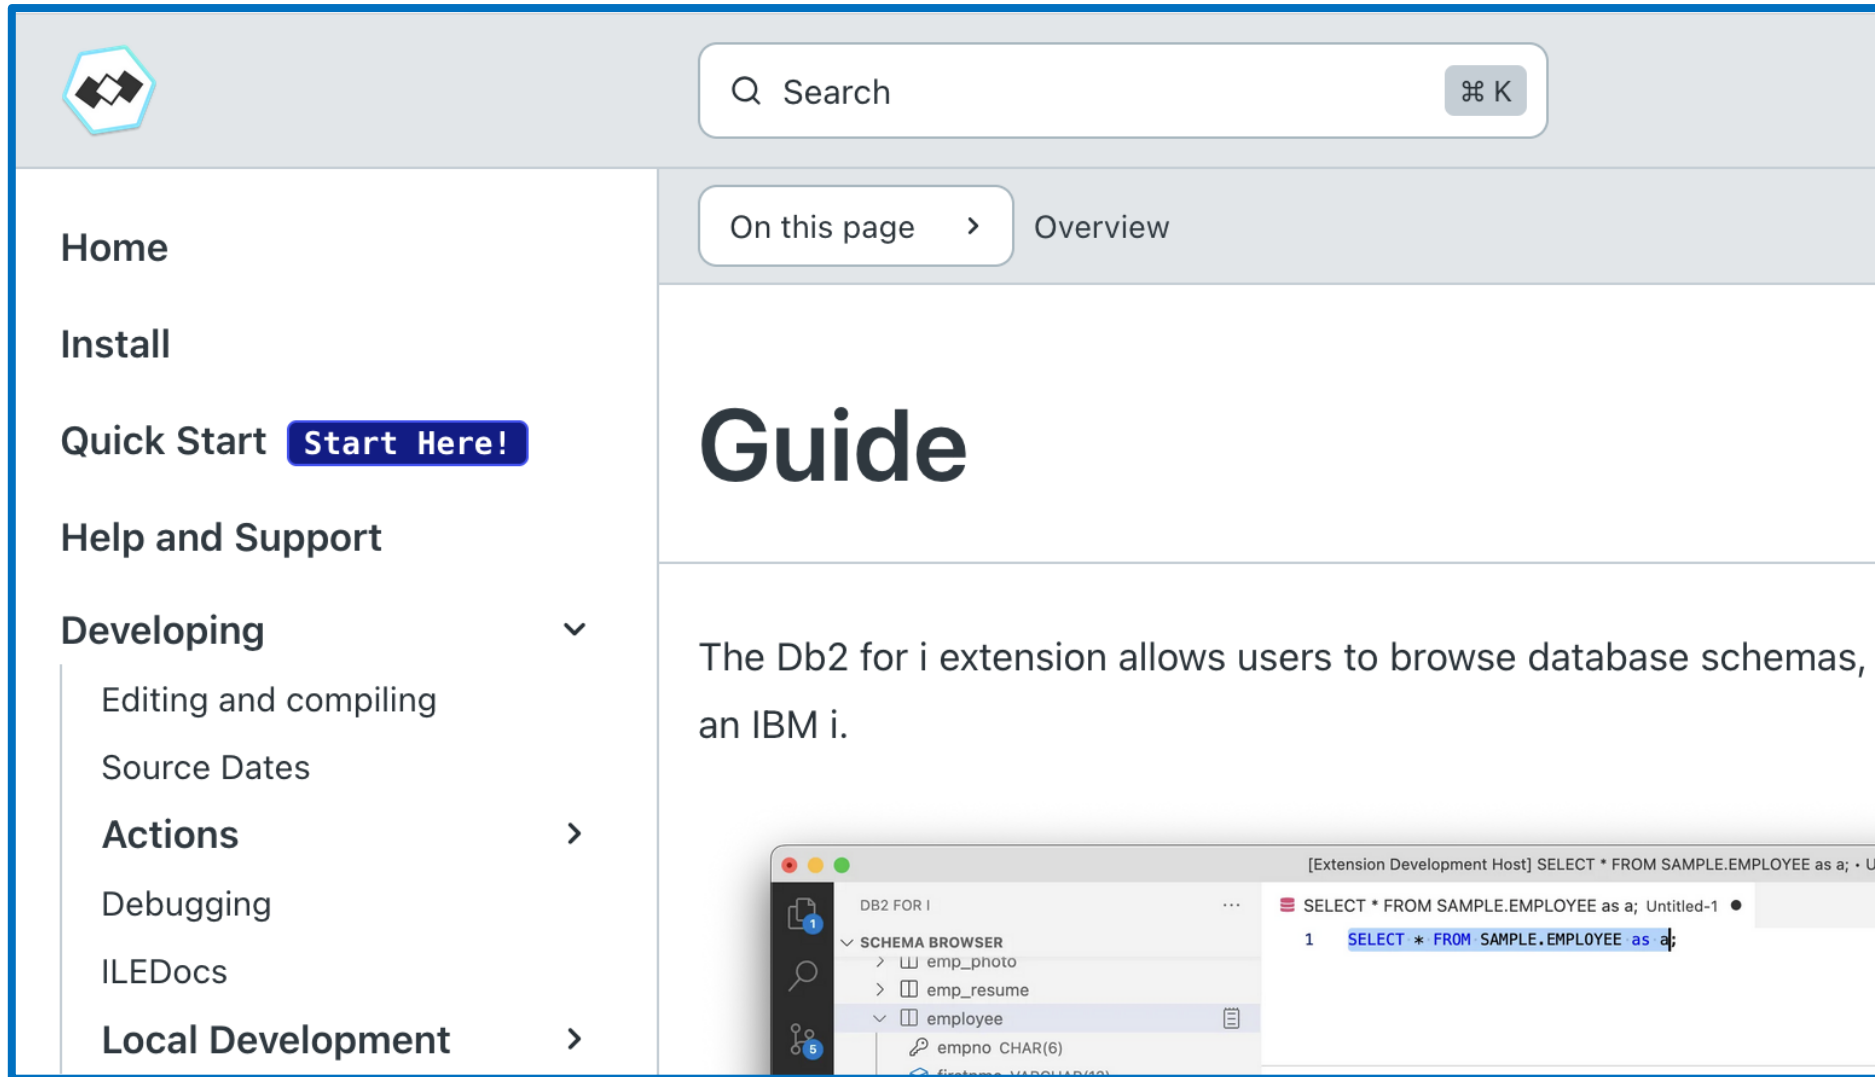

The screenshot shows the documentation website for the Db2 for i extension. The left sidebar contains a navigation menu with the following items: Home, Install, Quick Start (with a 'Start Here!' button), Help and Support, Developing (with a dropdown arrow), Actions (with a right arrow), Debugging, ILEDocs, and Local Development (with a right arrow). The 'Developing' dropdown is open, showing 'Editing and compiling' and 'Source Dates'. The main content area has a search bar at the top with the text 'Search' and a keyboard shortcut '⌘ K'. Below the search bar, there are tabs for 'On this page' and 'Overview'. The main heading is 'Guide'. The text below the heading reads: 'The Db2 for i extension allows users to browse database schemas, an IBM i.' At the bottom of the main content area, there is a screenshot of a code editor window. The window title is '[Extension Development Host] SELECT * FROM SAMPLE.EMPLOYEE as a;'. The code editor shows a SQL query: `SELECT * FROM SAMPLE.EMPLOYEE as a;`. The left sidebar of the code editor shows a 'SCHEMA BROWSER' with a tree view containing 'emp_photo', 'emp_resume', and 'employee'. The 'employee' schema is expanded, showing 'empno CHAR(6)'.

<https://codefori.github.io/docs/extensions/db2i/>

Meet the Database Extension

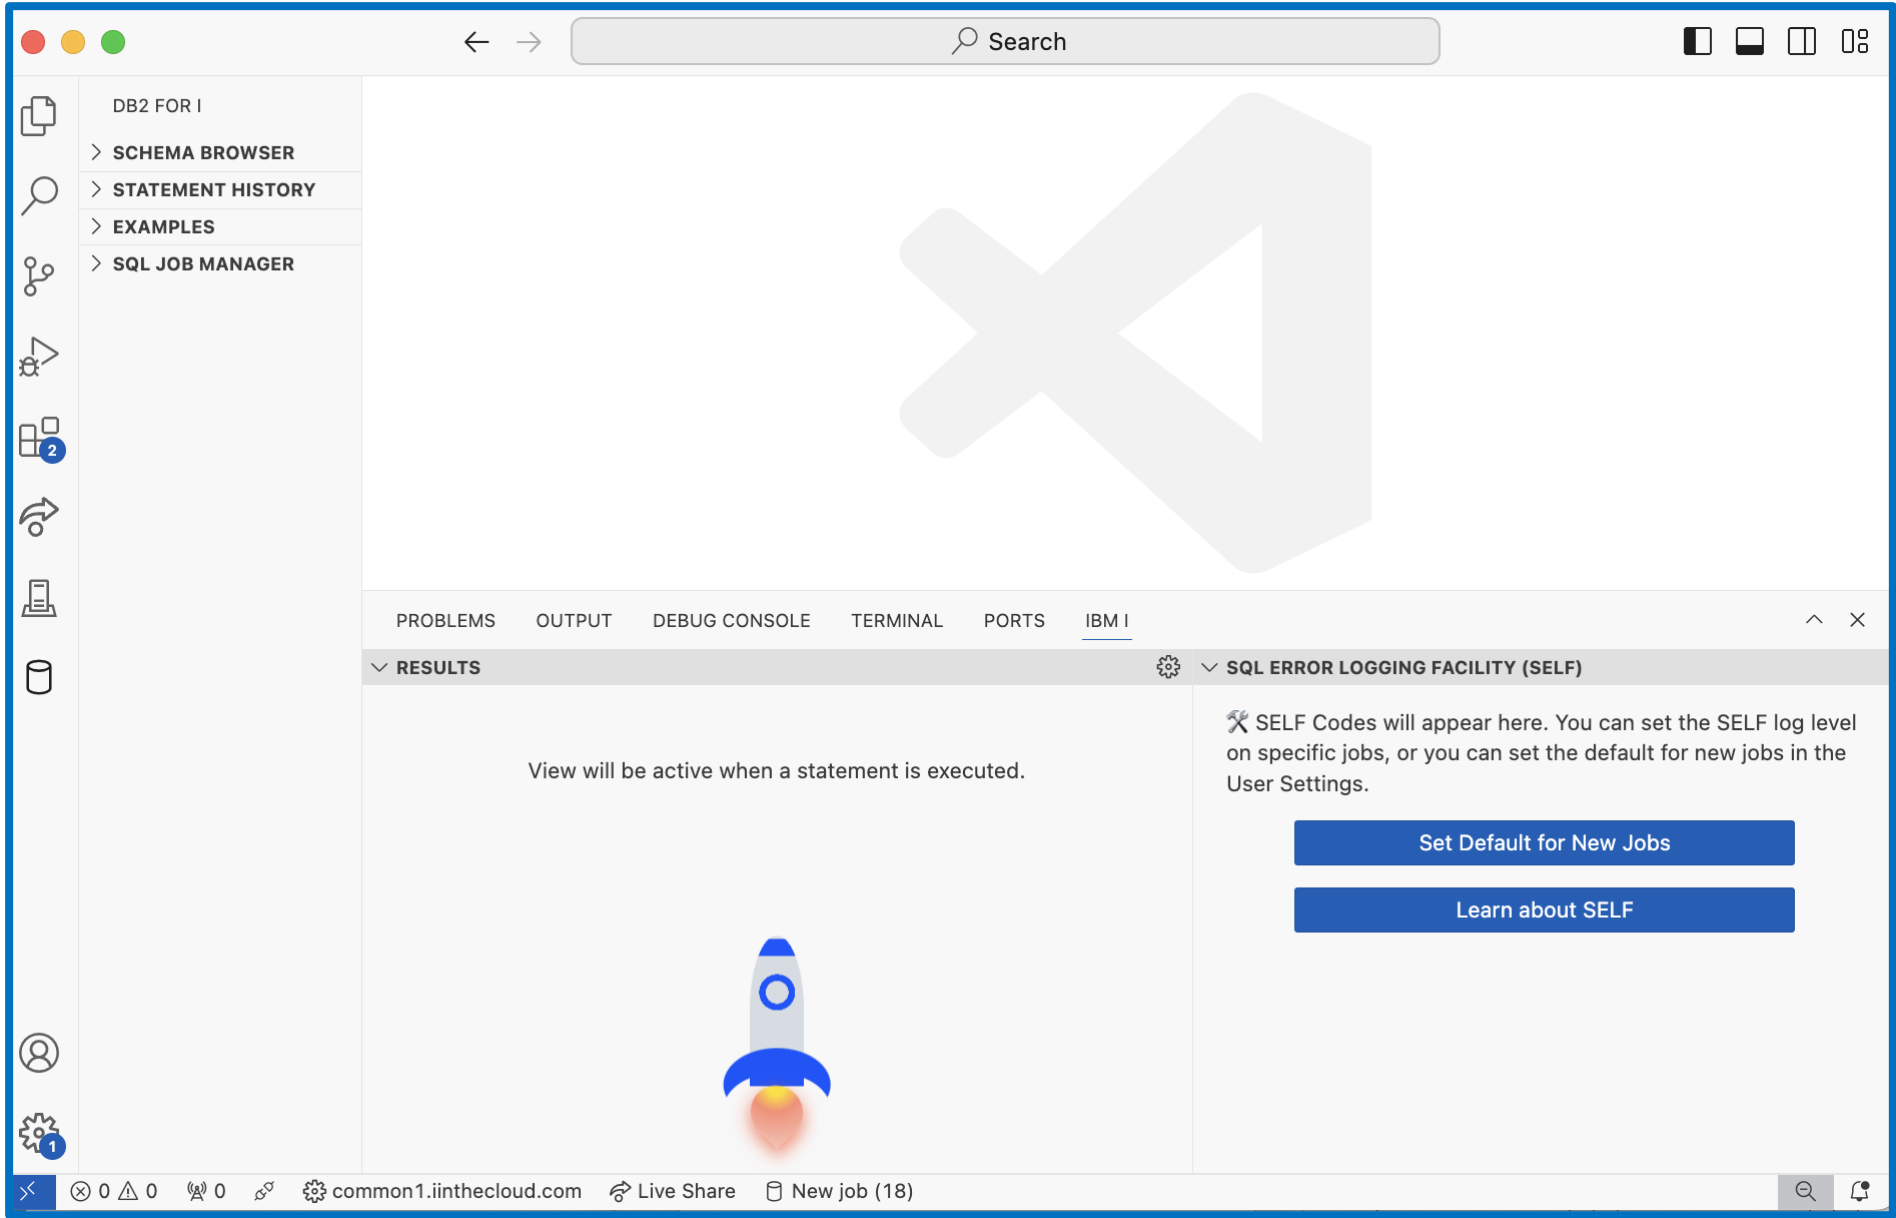

Run SQL statements



Untitled-1

1

SELECT * FROM TOYSTORE3.ITEM_FACT limit 3;

Run statement

Run statement in new view

Run and explain statement

Explain without running

Run all statements

Run selected statements

Open as Notebook

Run statement

Ctrl+R

Run statement in new view

Ctrl+Alt+R

Run and explain statement

Ctrl+Shift+R

Explain without running

Ctrl+Alt+R

Run all statements

Run selected statements

Open as Notebook

PROBLEMS

DB2 FOR I

DEBUG CONSOLE

OUTPUT

TERMINAL

IBM I JOB LOG

⚙

🔍

✕

ORDERKEY	PARTKEY	SUPPKEY	LINENUMBER	QUANTITY	EXTENDEDPRICE	DISCOUNT	TAX	RETURNFLAG	LINESTATUS
1	155190	7706	1	26	21168.22	0.09	0.02	A	F
1	67310	7388	2	46	45983.16	0.13	0.05	A	F
1	63700	3444	3	888	13309.6	0.11	0.02	A	F

Loaded 3 rows in 141ms.
End of data.

752900/QUSER/QZDASOINIT

SQL Syntax Checking



```
172 select *
174   json_table(
182   );
183   ;
184 stop;
185
186 create or replace variable coolstuff.wrapper clob(2m) for sbcs data;
187 set coolstuff.wrapper = wrap('create or replace function coolstuff.add_them()
188   returns bigint
189   return (1+2)'); Token ) was not valid. Valid tokens: <END-OF-STATEMENT>. - 42601
190 values coolstuff.wrapper;
191
192 values wrap('create or replace function coolstuff.add_them()
193   returns bigint
194   return (1+2)');
195
196 call SYSIBADM.CREATE_WRAPPED('create or replace function coolstuff.add_them()
197   returns bigint
198   return (1+2)');
```

OUTPUT DEBUG CONSOLE **TERMINAL 4** PORTS IBM I IBM I JOB LOG

▼ **PROBLEMS** Filter (e.g. text, **/*.ts,...)

- ▼ 16A - Companion Script - Meet the SQL Tutor.sql ~/NEUGC - April 2025 4
 - ⊗ Token) was not valid. Valid tokens: <END-OF-STATEMENT>. - 42601 (SQL0104) [Ln 189, Col 17]
 - ⊗ Token VARCHAR was not valid. Valid tokens: DYNAMIC SENSITIVE ASENSITIVE INSENSITIVE. - 42601 (SQL0104) [Ln 584, Col 25]
 - ⊗ Keyword CONDITION not expected. Valid tokens: DYNAMIC SENSITIVE ASENSITIVE INSENSITIVE. - 4... (SQL0199) [Ln 586, Col 21]
 - ⊗ Token * was not valid. Valid tokens: (CL END GET SET TAG CALL DROP FREE HOLD LOCK OPEN WIT... (SQL0104) [Ln 586, Col 43]

Use hover to understand procedures and functions

```
select * from table(qsys2.active_job_info());
```

```
active_job_info(  
  reset_statistics => character varying(3),  
  subsystem_list_filter => character varying(274),  
  job_name_filter => character varying(10),  
  current_user_list_filter => character varying(109),  
  detailed_info => character varying(5)  
): 125 columns
```

@param reset_statistics NO, YES - Default: NO

@param subsystem_list_filter up to 25 names with exactly one comma between names - Default: all subsystems

@param job_name_filter unqualified job name, generic name, *, *ALL, *CURRENT, *SBS, *SYS - Default: *ALL

@param current_user_list_filter up to 10 names with exactly one comma between names - Default: all users

@param detailed_info ALL, NONE, QTEMP, WORK - Default: NONE

[Search on IBM Documentation](#)

Data Load SQL Generator



DB2 FOR I

and scheduled job info.sql

drive kraken77 table dml on ctcd31a.sql

iSee Dead Jobs.sql

SCHEMA BROWSER

TOYSTORE3

Tables

cust_dim

custkey INTEGER

customer CHAR(...)

address CHAR(40)

phone CHAR(15)

mktsegment CHA...

country CHAR(25)

continent CHAR(...)

region CHAR(25)

STATEMENT HISTORY

EXAMPLES

SQL JOB ...

New job (14) 262454/...

Saved Configuration

ctcd31a - db2data...

common1 SQL nami...

sync19 - iasp1

1 SELECT * FROM TOYSTORE3.CUST_DIM

2 where country = 'CANADA' and salesperson = 'SalesPerson#00007'

3 limit 10;

4

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

IBM I

RESULTS


CUSTKEY	CUSTOMER	ADDRESS	PHONE	MI
13	Customer#000000013	wM1A1C75Qi6Ljx2N6C	13-761-547-5974	BL
22	Customer#000000022	6wn67O2wBh4Qi26MLRSMAOQ2	13-806-545-9701	M/
226	Customer#000000226	2 2Qxi0B16202gA1C5yyjOSjOOy	13-452-318-7709	AL
249	Customer#000000249	1hB6hQ2mz00 ICiLgOLg6M770m01y6L	13-226-455-7727	M/
440	Customer#000000440	C2S7mi25P2hP2CC	13-244-480-5751	M/
702	Customer#000000702	3OMP4Skw761Onj21i7CAC3 xS5yALCSAn0	13-549-296-5659	FL
			13-264-	

Generate an INSERT with VALUES
for this data

Data Load SQL Generator



Prefix the query with sql:

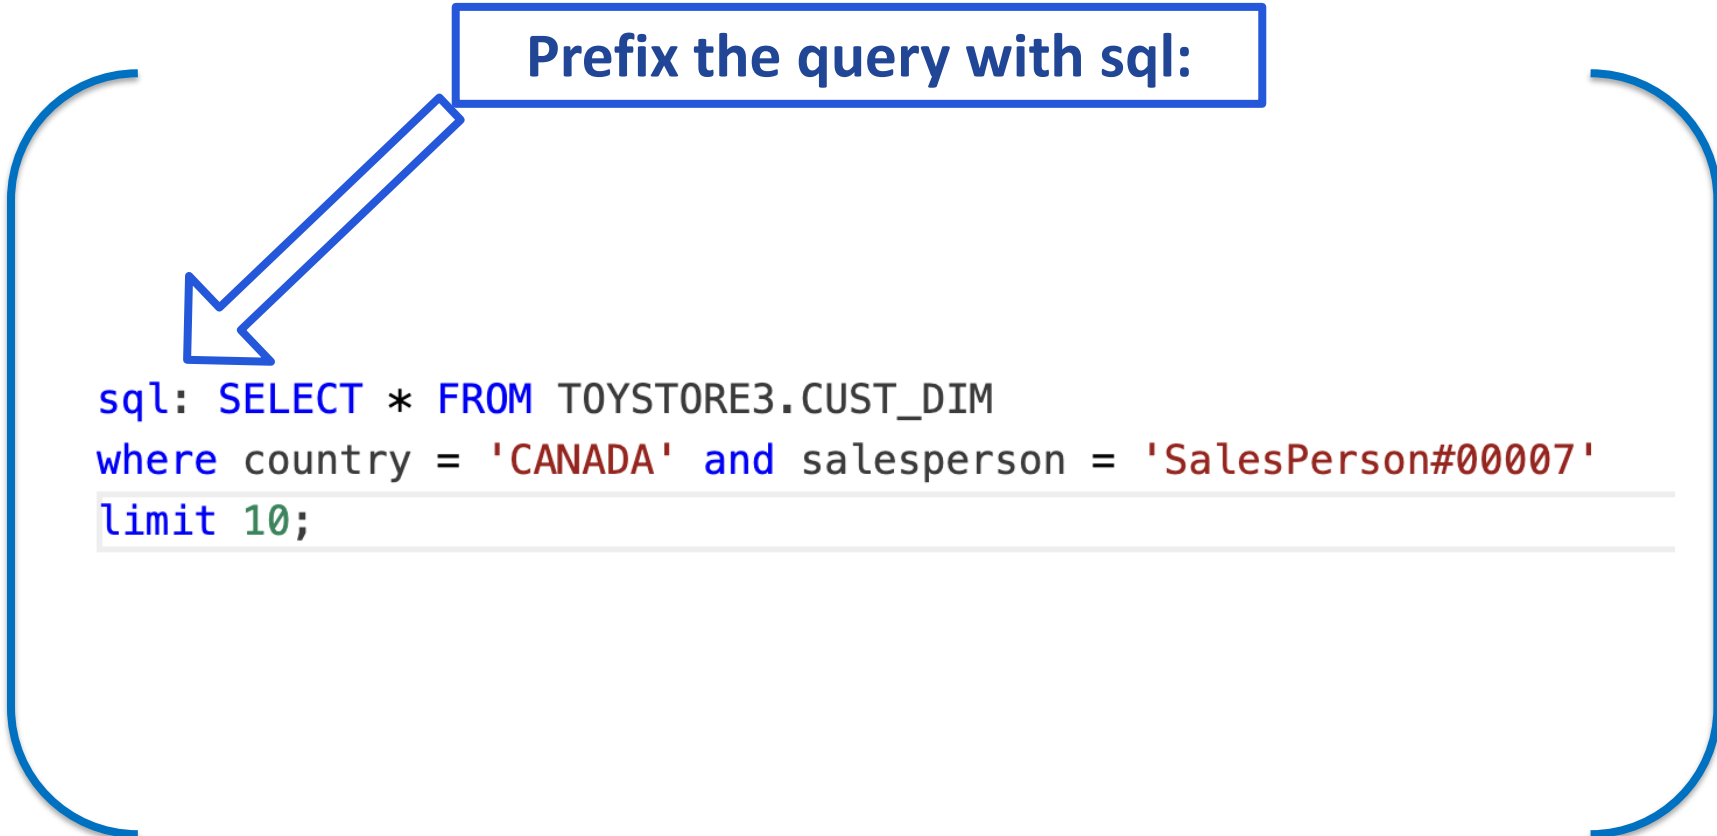A large blue bracket on the left side of the slide, and a blue arrow pointing from the 'Prefix the query with sql:' box to the SQL query.

```
sql: SELECT * FROM TOYSTORE3.CUST_DIM  
where country = 'CANADA' and salesperson = 'SalesPerson#00007'  
limit 10;
```

Code4i built the INSERT with VALUES SQL statement

-- Generated 1 insert statement

```
insert into TABLE (  
  CUSTKEY, CUSTOMER, ADDRESS, PHONE, MKTSEGMENT, COUNTRY, CONTINENT, REGION, TERRITORY, SALESPERSON, DUMMYKEY  
) values  
(13, 'Customer#000000013', 'wM1A1C75Qi6Ljx2N6C', '13-761-547-5974', 'BUILDING', 'CANADA', 'AMERICA',  
'NORTHEAST', 'THREE', 'SalesPerson#00007', '*'),  
(22, 'Customer#000000022', '6wn6702wBh4Qi26MLRSMA0Q2', '13-806-545-9701', 'MACHINERY', 'CANADA',  
'AMERICA', 'NORTHWEST', 'ONE', 'SalesPerson#00007', '*'),  
(226, 'Customer#000000226', '2 2Qxi0B16202gA1C5yyj0Sj00y', '13-452-318-7709', 'AUTOMOBILE', 'CANADA',  
'AMERICA', 'SOUTHEAST', 'FIVE', 'SalesPerson#00007', '*'),  
(249, 'Customer#000000249', '1hB6hQ2mz00 lCiLg0Lg6M770m01y6L', '13-226-455-7727', 'MACHINERY', 'CANADA',  
'AMERICA', 'SOUTHWEST', 'FOUR', 'SalesPerson#00007', '*'),  
(440, 'Customer#000000440', 'C2S7mi25P2hP2CC', '13-244-480-5751', 'MACHINERY', 'CANADA', 'AMERICA',  
'NORTHWEST', 'FIVE', 'SalesPerson#00007', '*'),
```

Data Load SQL Generators

```
sql: SELECT *  
FROM SAMPLE.EMPLOYEE  
WHERE EMPNO != '000010'
```

```
csv: SELECT *  
FROM SAMPLE.EMPLOYEE  
WHERE EMPNO != '000010'
```

```
json: SELECT *  
FROM SAMPLE.EMPLOYEE  
WHERE EMPNO != '000010'
```


SQL Query and results published in JSON



```
json: SELECT * FROM TOYSTORE3.CUST_DIM  
where country = 'CANADA' and salesperson = 'SalesPerson#00007'  
limit 10;
```

```
{  
  "CUSTKEY": 13,  
  "CUSTOMER": "Customer#000000013",  
  "ADDRESS": "wM1A1C75Qi6Ljx2N6C",  
  "PHONE": "13-761-547-5974",  
  "MKTSEGMENT": "BUILDING",  
  "COUNTRY": "CANADA",  
  "CONTINENT": "AMERICA",  
  "REGION": "NORTHEAST",  
  "TERRITORY": "THREE",  
  "SALESPERSON": "SalesPerson#00007",  
  "DUMMYKEY": "*"  
},  
{  
  "CUSTKEY": 22,  
  "CUSTOMER": "Customer#000000022",
```

Generate Inserts from File

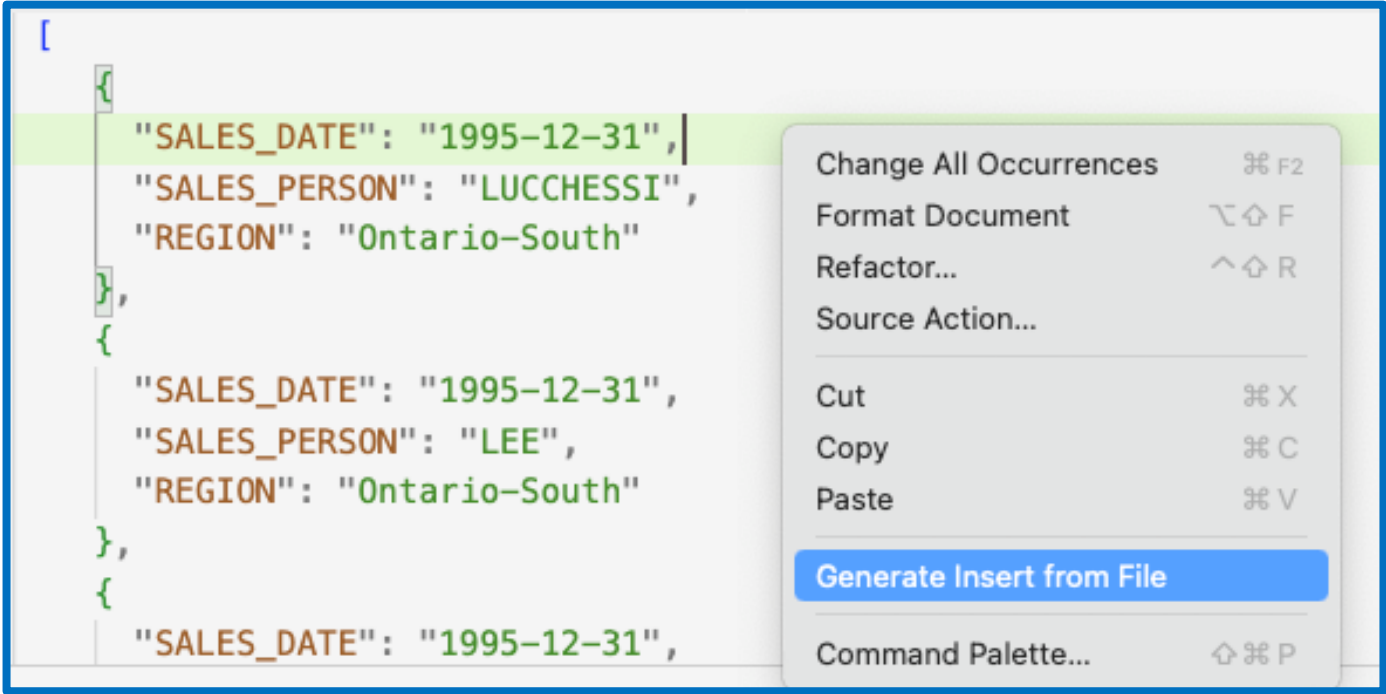

What format is this file?

csv

json

Generate Inserts from File



```
1  INSERT INTO TABLE (SALES_DATE, SALES_PERSON, REGION)
2  VALUES
3      ('1995-12-31', 'LUCCHESSI', 'Ontario-South'),
4      ('1995-12-31', 'LEE', 'Ontario-South'),
5      ('1995-12-31', 'LEE', 'Quebec'),
6      ('1995-12-31', 'LEE', 'Manitoba'),
7      ('1995-12-31', 'GOUNOT', 'Quebec'),
8      ('1996-03-29', 'LUCCHESSI', 'Ontario-South'),
9      ('1996-03-29', 'LUCCHESSI', 'Quebec'),
10     ('1996-03-29', 'LEE', 'Ontario-South'),
11     ('1996-03-29', 'LEE', 'Ontario-North'),
12     ('1996-03-29', 'LEE', 'Quebec');
```

Updatable Cells



Untitled-1

✓

✂

▶

📄

☰

📱

⋮

1

update: SELECT * FROM TOYSTORE.ACT where actno < 50;

PROBLEMS

DB2 FOR I

DEBUG CONSOLE

OUTPUT

TERMINAL

IBM I JOB LOG

⚙

🔍

✕

RRN	ACTNO	ACTKWD	ACTDESC
1	11	MANAGE	MANAGE/ADVISE
2	20	ECOST	ESTIMATE
3	30	DEFINE	DEFINE SPECS
4	40	LEADPR	LEAD PROGRAM/DESIGN

UPDATE TOYSTORE.ACT t SET t.ACTDESC = 'ESTIMATE' WHERE RRN(t) = 2

Loaded 4 rows in 59ms. End of data. Updatable.

752899/QUSER/QZDASOINIT

Binding Parameters



Untitled-1

✓✂▶📄☰📖⋮

```
1 select * from table(qsys2.object_statistics(?,?));
2 bind: 'COOLSTUFF', '*PGM';
3
4 select * from toystore.employee where empno < :maxEmpno;
5 bind: '000110';
```

PROBLEMSDB2 FOR IDEBUG CONSOLEOUTPUTTERMINALIBM I JOB LOG

⚙️🔍✕

EMPNO	FIRSTNME	MIDINIT	LASTNAME	WORKDEPT	PHONENO	HIREDATE	JOB	EDLEVEL
000010	CHRISTINE	I	HAAS	A00	3978	1965-01-01	PRES	18
000020	MICHAEL	L	THOMPSON	B01	3476	1973-10-10	MANAGER	18
000030	SALLY	A	Rowe	C01	4738	1975-04-05	MANAGER	20
000050	JOHN	B	GEYER	E01	6789	1949-08-17	MANAGER	16
000060	IRVING	F	STERN	D11	6423	1973-09-14	MANAGER	16
000070	EVA	D	PULASKI	D21	7831	1980-09-30	MANAGER	16
000090	EILEEN	W	HENDERSON	E11	5498	1970-08-15	MANAGER	16
000100	THEODORE	Q	SPENSER	E21	0972	1980-06-19	MANAGER	14

Loaded 8 rows in 90ms.
End of data.

752899/QUSER/QZDASOINIT

SQL Prefixes Coming Soon



```
Untitled-1  • ...  Untitled-2  •
1  udtf: select * from toystore.staff;
1  -- statement:
2  -- select * from toystore.staff
3
4  -- User-defined table function
5  CREATE OR REPLACE FUNCTION MyFunction()
6  RETURNS TABLE (
7      ID INTEGER,
8      NAME VARCHAR(9),
9      DEPT INTEGER,
10     JOB CHAR(5),
11     YEARS INTEGER,
12     SALARY DECIMAL(7,2),
13     COMM DECIMAL(7,2)
14 )
15 NOT DETERMINISTIC
16 NO EXTERNAL ACTION
17 READS SQL DATA
18 SET OPTION COMMIT = *NONE,
19     DYNUSRPRF = *USER,
20     USRPRF = *USER
21 BEGIN
22     RETURN select * from toystore.staff;
23 END;
```

SQL Prefixes Coming Soon



```
Untitled-1
1 rpgproc: select
2   empno,
3   rtrim(firstnme) || ' ' || rtrim(midinit) || ' ' || rtrim(lastname),
4   salary + bonus + comm
5 from
6   sample.employee
7 where
8   empno = ?;

Untitled-3
1 **free
2
3 ctl-opt nomain;
4
5 dcl-ds employee_t qualified template;
6   empno char(6);
7   name varchar(50);
8   netincome packed(9:2);
9 end-ds;
10
11 dcl-proc getEmployee export;
12   dcl-pi *n like(employee_t);
13   empno char(6) const;
14 end-pi;
15
16 dcl-ds employee likeds(employee_t);
17
18 exec sql
19   select
20     empno,
21     rtrim(firstnme) || ' ' || rtrim(midinit) || ' ' || rtrim(lastname),
22     salary + bonus + comm
23   into
24     :employee.empno,
25     :employee.name,
26     :employee.netincome
27   from
28     sample.employee
29   where
30     empno = :empno;
31
32 return employee;
33 end-proc;
```

Schema Browser



DB2 FOR I

SCHEMA BROWSER

> QGPL

> TIMS_BIG_BANK

> TOYSTORE

> Aliases

> Logicals

> Functions

> Global Variables

> Indexes

> Procedures

> rpg123_proc

> slf_proc

> Tables

> act

> cl_sched

> department

> emp_photo

> emp_resume

> employee

> empproject

> in_tray

> org

> project

> project

> sales

> sample_parks

> staff

> Triggers

> Types

> Views

Untitled-1

1 SELECT * FROM TOYSTORE.ACT as a

View contents

PROBLEMS

DB2 FOR I

DEBUG CONSOLE


OUTPUT

TERMINAL

IBM I JOB LOG

ACTNO	ACTKWD	ACTDESC
10	MANAGE	MANAGE/ADVISE
20	ECOST	ESTIMATE COST
30	DEFINE	DEFINE SPECS
40	LEADPR	LEAD PROGRAM/DESIGN
50	SPECS	WRITE SPECS
60	LOGIC	DESCRIBE LOGIC
70	CODE	CODE PROGRAMS
80	TEST	TEST PROGRAMS
90	ADMQS	ADM QUERY SYSTEM
100	TEACH	TEACH CLASSES
110	COURSE	DEVELOP COURSES
120	STAFF	PERS AND STAFFING

Access to More Database Objects (Coming Soon)

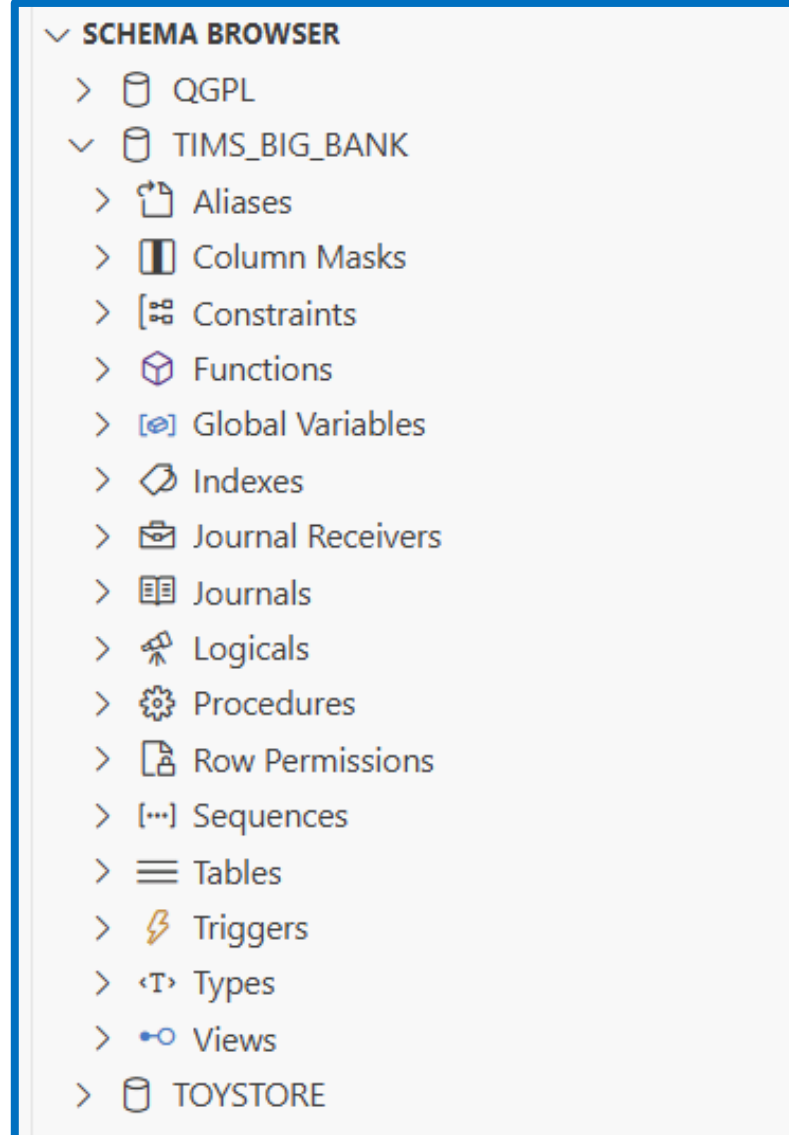

Statement History



DB2 FOR I

11

SCHEMA BROWSER

STATEMENT HISTORY

Past day

select * from...

Past week

Past month

Older

16A - Companion Script - Meet the SQL Tutor.sql 4

jesses latest.sql

How dunnit to storage?.sql

Users > scottforstie > NEUGC - April 2025 > 16A - Companion Script - Meet the SQL Tutor.sql

165 values qsys2. http_get(

169 stop;

170

171 -- What should you do if you're running low on "Dad jokes"?

172 select.*

173 ..from.

174 ..json_table(

175QSYS2.HTTP_GET(

176 'https://icanhazdadjoke.com/', '{"header":"Accept,application/json","sslTolerate":"true"}')

177 ,

178 'lax.\$'

179 columns(

180 "joke".varchar(200).ccsid.1208

181)

182);

183 ;

184 stop;

185

186 create or replace variable coolstuff.wrapper clob(2m) for sbcs data;

OUTPUT

DEBUG CONSOLE

TERMINAL 4

PORTS

IBM I

IBM I JOB LOG

RESULTS

joke

How does the moon cut his hair? Eclipse it.

Loaded 1 rows in 3381ms. End of data.

966943/QUSER/QZDASOINIT

Visual Explain – Run and Explain



Execute and use Visual Explain to understand the query implementation

vs db ext demo 1

Users > scottforstie > Downloads > scottforstie lives here > vs db e

14

15 select shipmode, count(*) from toystore3.item_fact

16 where orderpriority = '4-NOT SPECIFIED'

17 group by shipmode

18 order by count(*) desc

19 limit 10;

20

21

Run statement ⌘ R

Run and explain statement ⏏ ⌘ R

Explain without running ⌘ R

Open as Notebook

Visual Explain – Explain without running



Use Visual Explain to understand the possible query implementation

vs db ext demo 1

Users > scottforstie > Downloads > scottforstie lives here > vs db e

14

15 select shipmode, count(*) from toystore3.item_fact

16 where orderpriority = '4-NOT SPECIFIED'

17 group by shipmode

18 order by count(*) desc

19 limit 10;

20

21

Run statement ⌘ R

Run and explain statement ⌘ R

Explain without running ⌘ R

Open as Notebook

Visual Explain - Details



DB2 FOR I

SCHEMA BROWSER

STATEMENT HISTORY

Past day

SELECT USER_NAME, SUM(SIZE) A...

Past week

EXAMPLES

Built-in Global Variables

Data Control Language (DCL)

Data Definition Language (DDL)

Data Manipulation Language (DML)

Db2 for i Services

Geospatial Analytics

IBM i (SQL) Services

IBM i Services

Miscellaneous

Notebooks

Routine (Function or Procedure) Statem...

Special Registers

SQL Built-in Functions

SYSTOOLS for you

ibmi-company_system

1 SELECT USER_NAME, SUM(SIZE) AS TOTAL_SPOOL_SPACE FROM

2 TABLE (QSYS2.OBJECT_STATISTICS('QSYS', '*LIB')) AS a,

3 TABLE (QSYS2.OBJECT_STATISTICS(a.objname, 'OUTQ')) AS b,

4 TABLE (QSYS2.OUTPUT_QUEUE_ENTRIES(a.objname, b.objname, '*NO')) AS c

5 WHERE USER_NAME NOT LIKE 'Q%'

6 GROUP BY USER_NAME

7 ORDER BY TOTAL_SPOOL_SPACE DESC

8 LIMIT 10

Run statement

Run and explain statement

Explain without running

Open as Notebook

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS GITLINS IBM I

VISUAL EXPLAIN

Final Select

Fetch N Rows

Sorted List Scan

Temporary Sorted List

Hash Scan

Temporary Distinct Hash Table

Nested Loop Join

Nested Loop Join

Cache Probe

Cache

User Defined Table Function qsys2.object_s...

Cache Probe

Cache

User Defined Table Function qsys2.object_s...

Cache Probe

Cache

User Defined Table Function qsys2.output_q...

VISUAL EXPLAIN DETAILS

Estimated Time Information (Start Time, Total Time)

Cumulative Time(ms) 7.036

Cache Information

Estimated Total Cache Size(Bytes) 139,264

Rows in Cache 5,000

Number of Cache Points 1

Key Cardinality 1

Key Size(bytes) 0

Non Key Data Size(bytes) 19

Populate At Open No

Temporary Reusable No


Estimated Cost Information About the Plan Performed

Estimated Population Time 1.117

I/O Or CPU Bound CPU Bound

CPU Cost(ms) 1.117

Visual Explain – Graph (Coming soon)

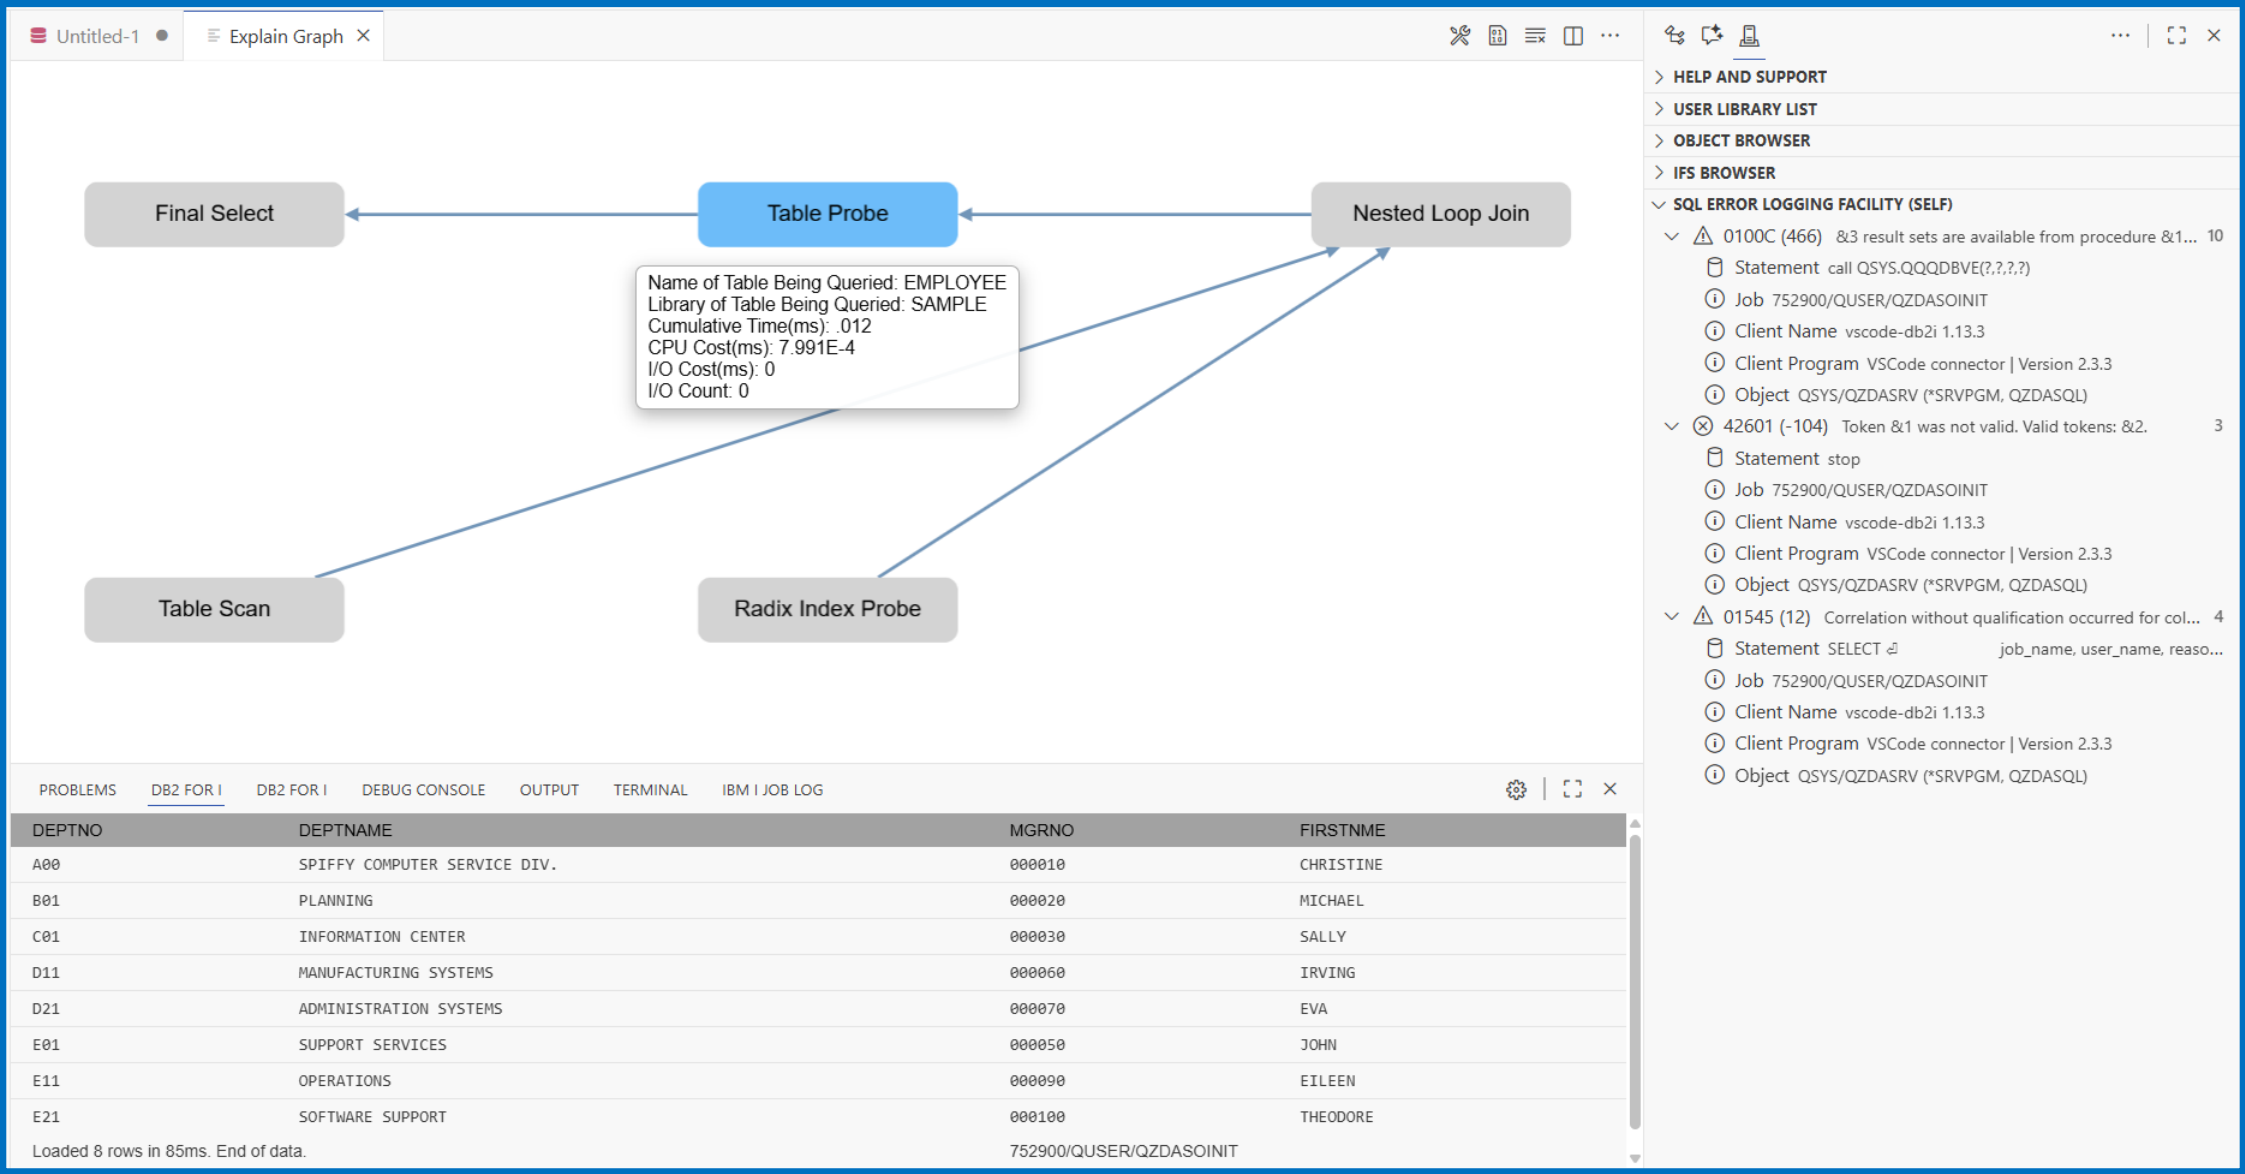

Insert From Examples



SQL JOB MANAGER

New job (1) 752900/QUSER/QZDASOINIT

EXAMPLES

Built-in Global Variables

Data Control Language (DCL)

Data Definition Language (DDL)

Data Manipulation Language (DML)

Db2 for i Services

Geospatial Analytics

- ST_Area
- ST_AsBinary
- ST_AsText
- ST_Buffer
- ST_Contains
- ST_Covers
- ST_Crosses
- ST_Difference
- ST_Disjoint
- ST_Distance

```
-- minvrm: v7r4m0

-- Create a table with a polygon column and insert several polygons that represent different New York City Parks
CREATE TABLE sample_parks (park_name VARCHAR(50), geometry QSYS2.ST_POLYGON);
INSERT INTO sample_parks (park_name, geometry) VALUES
  ('Central Park', QSYS2.ST_POLYGON('polygon((-73.9817 40.7682, -73.9581 40.8005, -73.9495 40.7968, -73.9732 40.7644, -73.9817 40.7682))')),
  ('Washington Square Park', QSYS2.ST_POLYGON('polygon((-73.9995 40.7310, -73.9986 40.7321, -73.9957 40.7307, -73.9966 40.7297, -73.9995 40.7310))'));

-- Find the area of each New York City Park in square meters
SELECT park_name,
       QSYS2.ST_AREA(geometry) as area_square_meters,
       QSYS2.ST_AREA(geometry) * 0.000247 as area_acres
FROM sample_parks;
```

Open Chat

Ctrl + Alt + I

Open Settings

Ctrl + ,

Toggle Terminal

Ctrl + `

Custom Examples



DB2 FOR I

> SCHEMA BROWSER

> STATEMENT HISTORY

> SQL JOB MANAGER

> EXAMPLES

IBM i (SQL) Services

add_mirror_iasp

add_mirror_takeover_address

add_mirror_version

add_nrg_link

add_query_threshold

add_replication_criteria

systools override_info - june 25.sql

1

2

3 */* Returns CLOB(2 GB) */*

4 **VALUES COOLSTUFF.GENERATE_JSON_FOR_A_TABLE(**

5 P_SCHEMA_NAME => ?, */* VARCHAR(128)*

6 P_TABLE_NAME => ?, */* VARCHAR(128)*

7 P_PAGINATION => **DEFAULT** */* VARCHAR(50)*

8 **);**

9

10 bind: 'TOYSTORE', 'SALES';

11

Untitled-7

Save As New Example

Select a custom example directories to save this example to


/Users/scottforstie/Scott - Examples

Example file name

Generate JSON from a Db2 for i table

Enter example file name (Press 'Enter' to confirm or 'Escape' to cancel)

Custom Examples

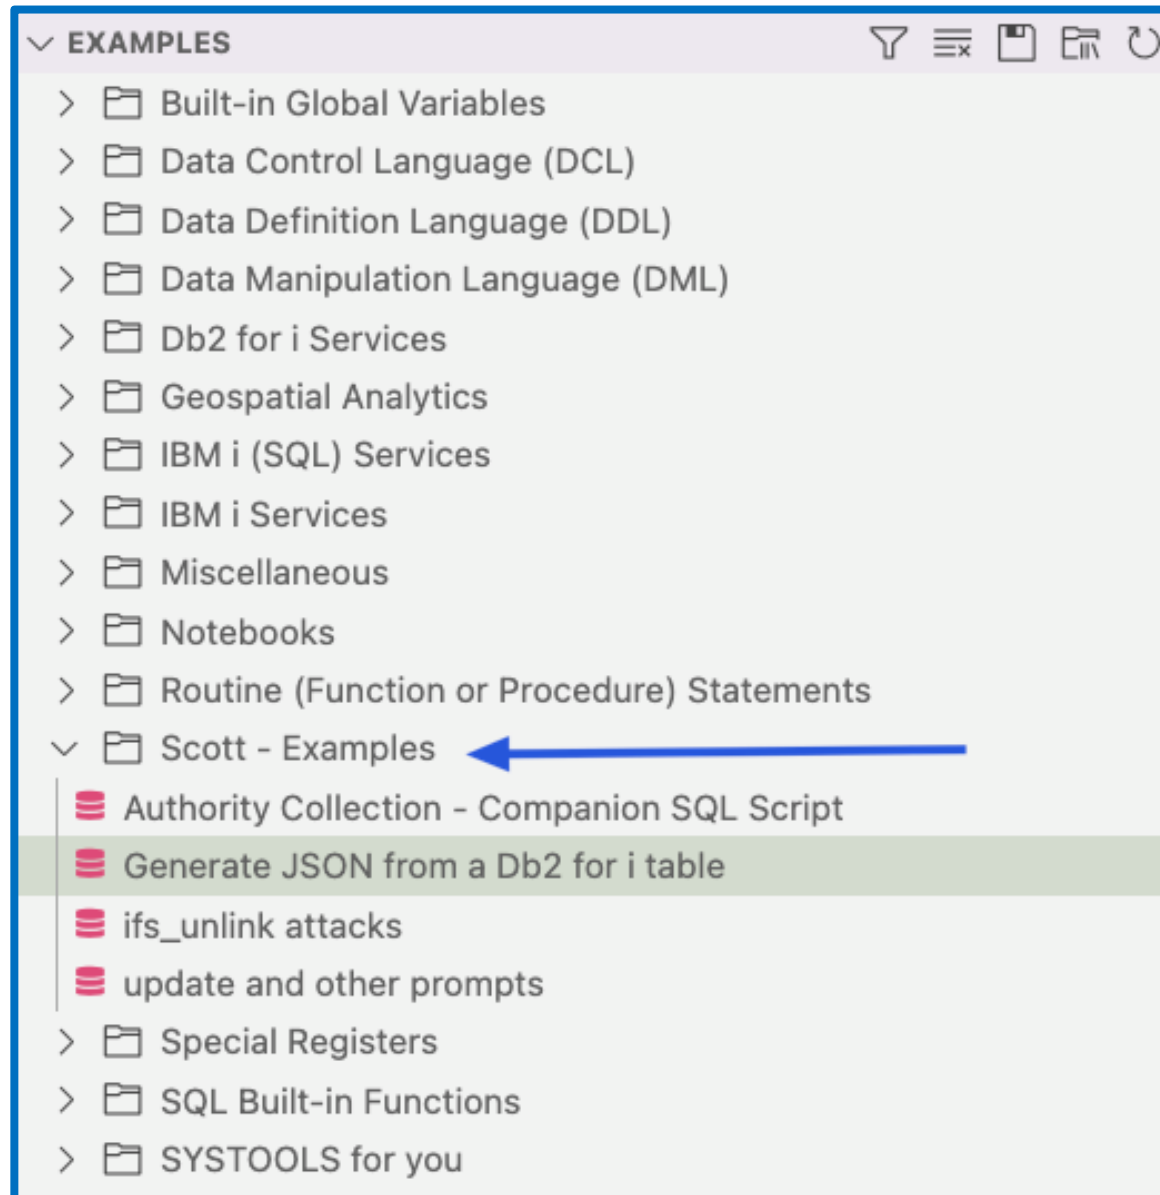

Notebooks



DB2 FOR I

> SCHEMA BROWSER

> STATEMENT HISTORY

> SQL JOB MANAGER

> EXAMPLES

- > Built-in Global Variables
- > Data Control Language (DCL)
- > Data Definition Language (DDL)
- > Data Manipulation Language (DML)
- > Db2 for i Services
- > Geospatial Analytics
- > IBM i (SQL) Services
- > IBM i Services
- > Miscellaneous
- > Notebooks
 - Authority Failures review
 - CPU Consumption (Pie)
 - IBM i History
 - IFS_OBJECT_STATISTICS (Bar)
 - Largest Objects owned (Line)
 - Local Services (Bar with tooltip)
 - Spool Storage (Line)
 - Temp storage by day (Line)
 - User Storage (Bar)
- > Routine (Function or Procedure) State...
- > Special Registers
- > SQL Built-in Functions

Untitled-1.inb

Generate + Code + Markdown | Run All | Clear All Outputs | Export | IBM i Notebook

Review the audit journal authority failure (AF) detail, over the last month

Which days had the highest number of AF entries?


```
bar: select date(entry_timestamp) as label, count(*) as AF_count
      from table (
        | SYSTOOLS.AUDIT_JOURNAL_AF(STARTING_TIMESTAMP => current timestamp - 1 month)
        | )
      group by date(entry_timestamp)
      order by AF_count desc
```

[] sql

Which users had the highest number of AF entries?

```
bar: select user_name as label, count(*) as AF_count
      from table (
        | SYSTOOLS.AUDIT_JOURNAL_AF(STARTING_TIMESTAMP => current timestamp - 1 month)
        | )
      group by user_name
      order by AF_count desc
```


[] sql

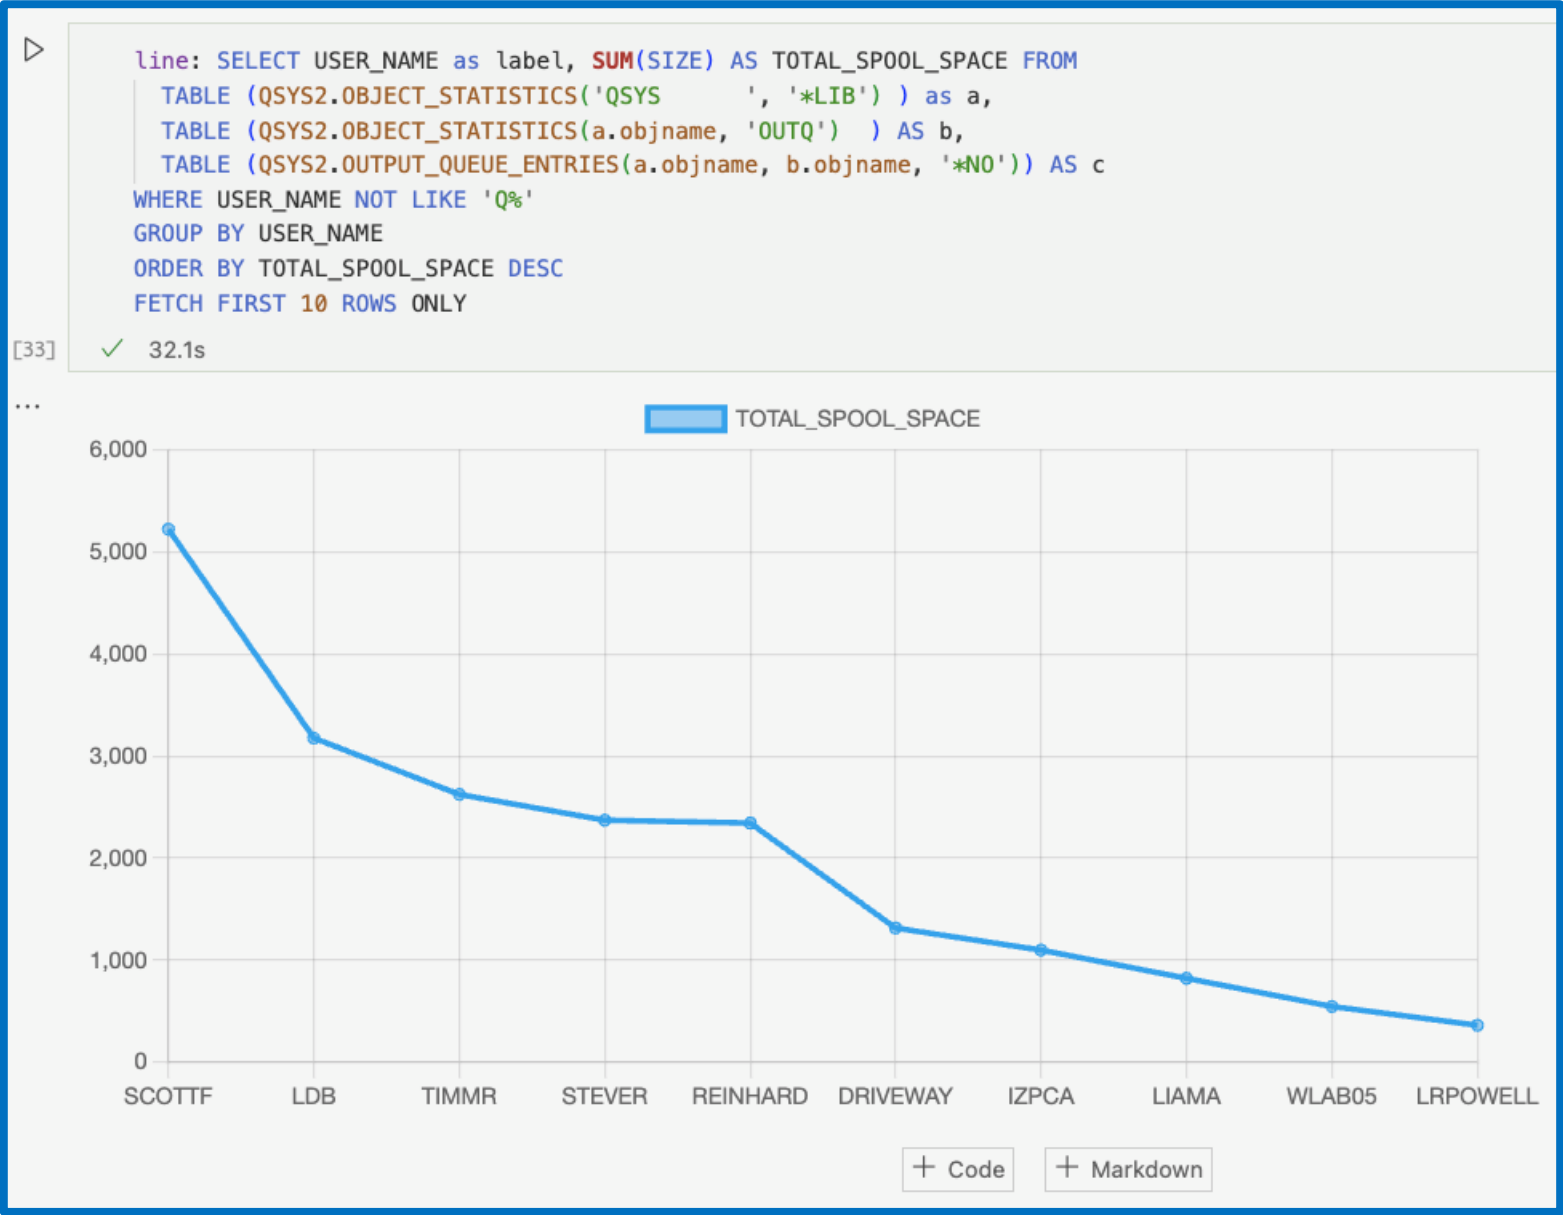



```
-- title: I/O top 10
-- hideStatement: true
-- y: I/O Drivers
bar: select from_job as label, sync_aux_io_count,
      from_user concat ' using ' concat JOB_INTERFACE as sync_aux_io_count_DESC
      from table (
        SYSTOOLS.ENDED_JOB_INFO()
      )
      where subsystem in ('QUSRWRK', 'QBATCH')
      order by sync_aux_io_count desc
      limit 10
```

[24] ✓ 6.8s

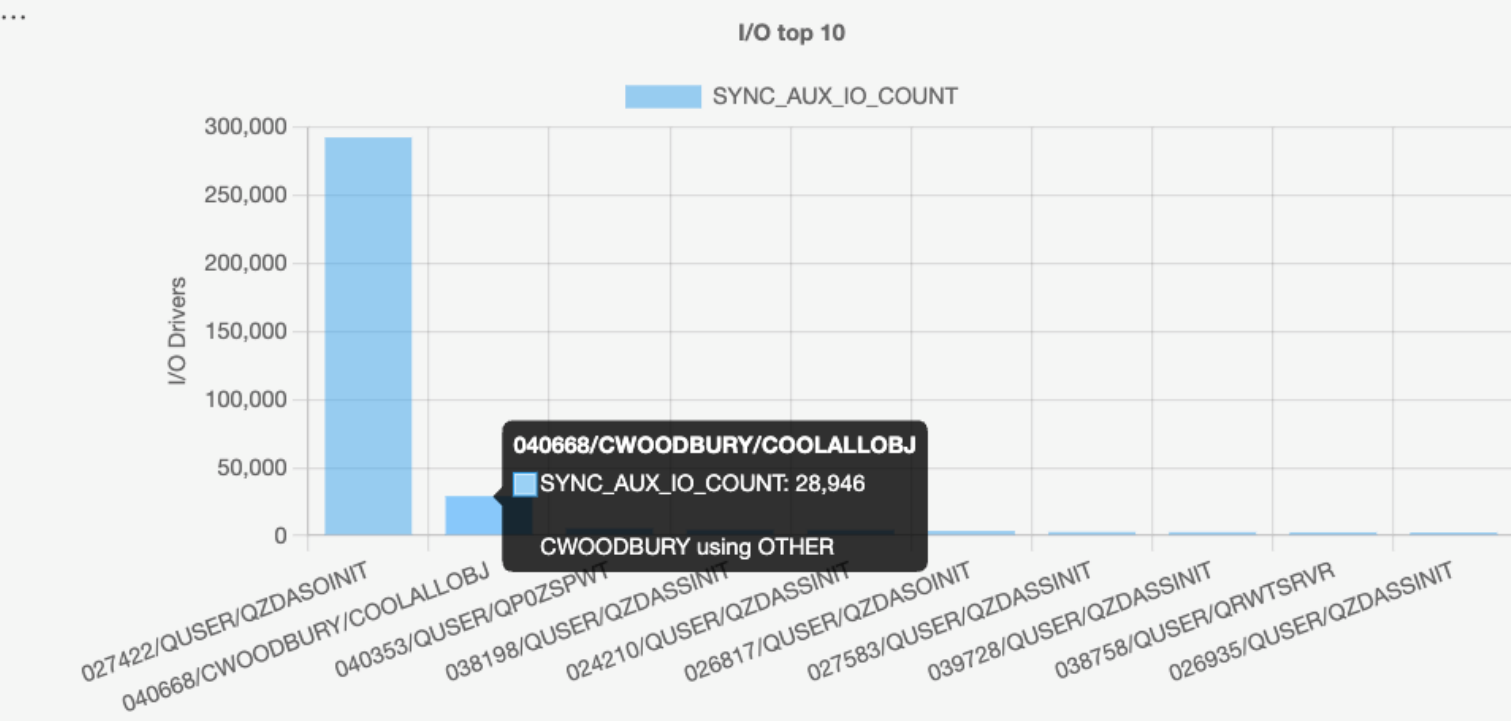



IBM i

