

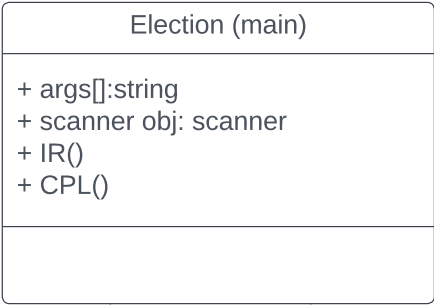
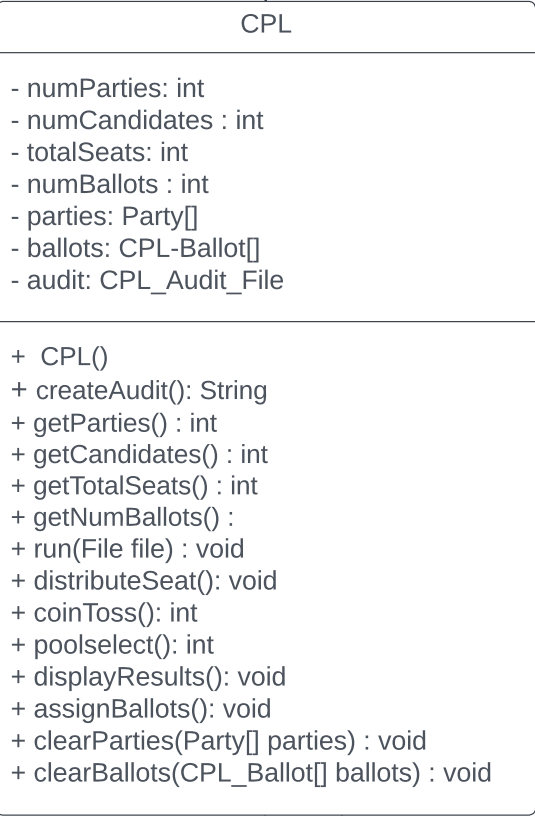


Parties are created with empty values. These values are populated with data during the processing of the cvs file

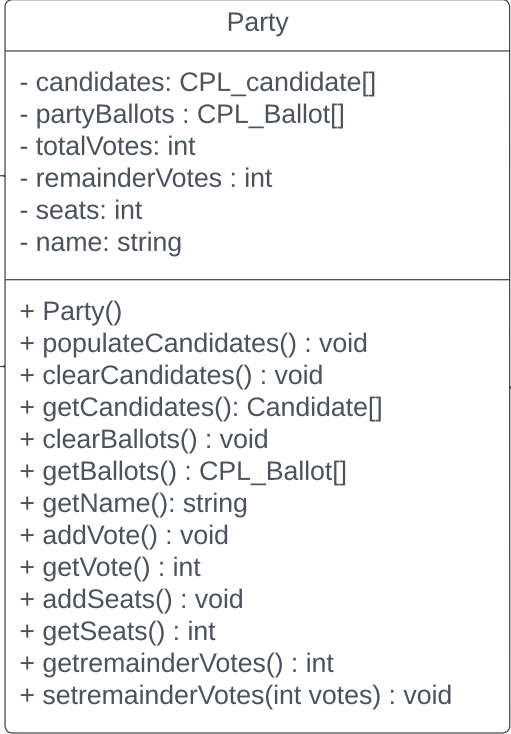



IR Class Notes:
- Make loser will tranfer votes and make status = 0

Ballot read in by line. Parse each line to be stored in array. Array index = candidate, value is pref ranking

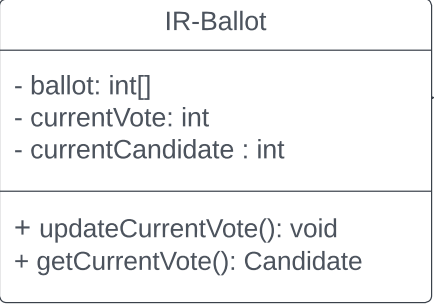

may have ballot inheritance for Future Ballot Types

The ballot will be read in one line at a time, each character will be checked for the vote position

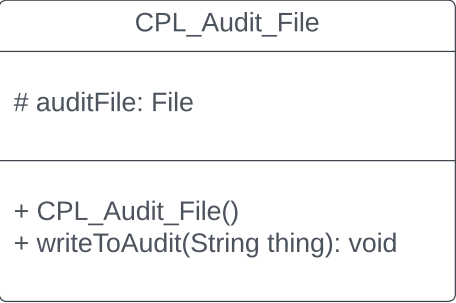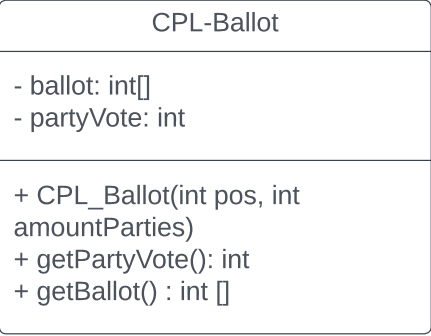

Do not use status for CPL, status indicates if candidate is removed from the election

