


`std::allocator< T >`

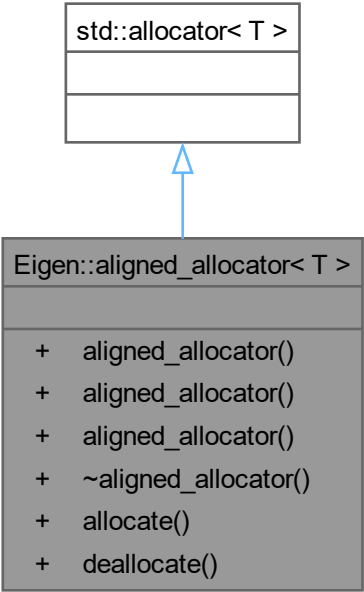

```
graph BT; A["Eigen::aligned_allocator< T >"] --> B["std::allocator< T >"]
```

The diagram illustrates the inheritance relationship between `Eigen::aligned_allocator< T >` and `std::allocator< T >`. A blue arrow points from the bottom of the `Eigen::aligned_allocator< T >` box to the bottom of the `std::allocator< T >` box, indicating that `Eigen::aligned_allocator< T >` inherits from `std::allocator< T >`. The `std::allocator< T >` box is divided into three horizontal sections, with the top section containing the class name. The `Eigen::aligned_allocator< T >` box is divided into three horizontal sections: the top section contains the class name, the middle section is empty, and the bottom section contains a list of methods.

`Eigen::aligned_allocator< T >`

- + `aligned_allocator()`
- + `aligned_allocator()`
- + `aligned_allocator()`
- + `~aligned_allocator()`
- + `allocate()`
- + `deallocate()`