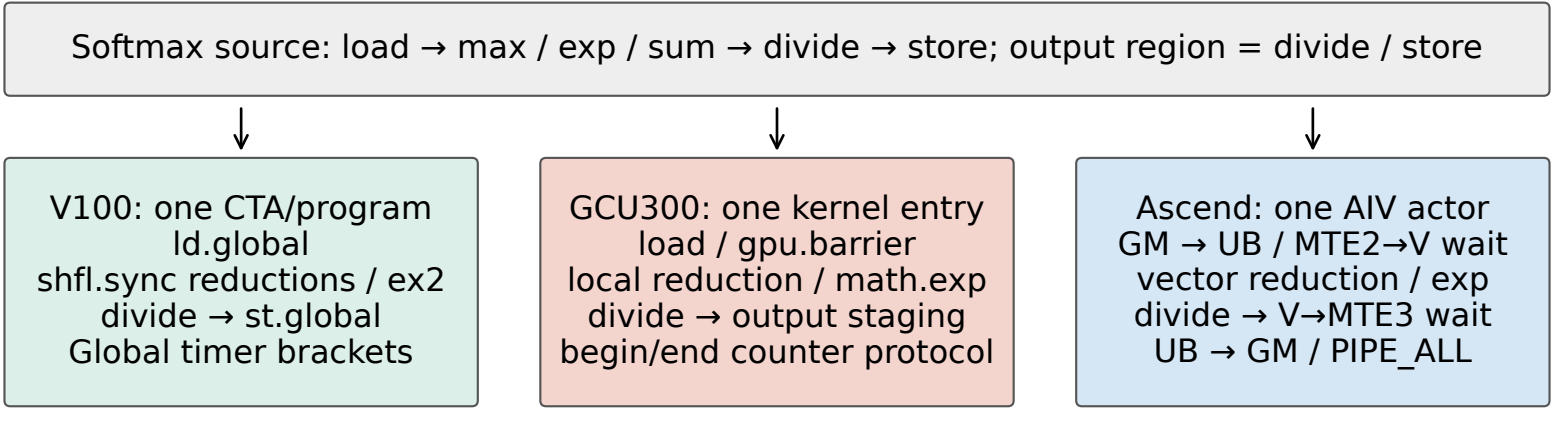

The shared request succeeds only where actor mapping, endpoints and clock protocol are preserved.
Compiler paths and source-region brackets; no inferred engine overlap.