Application, interface and personal records

Entry points, JavaFX presentation, navigation and the shared record store.

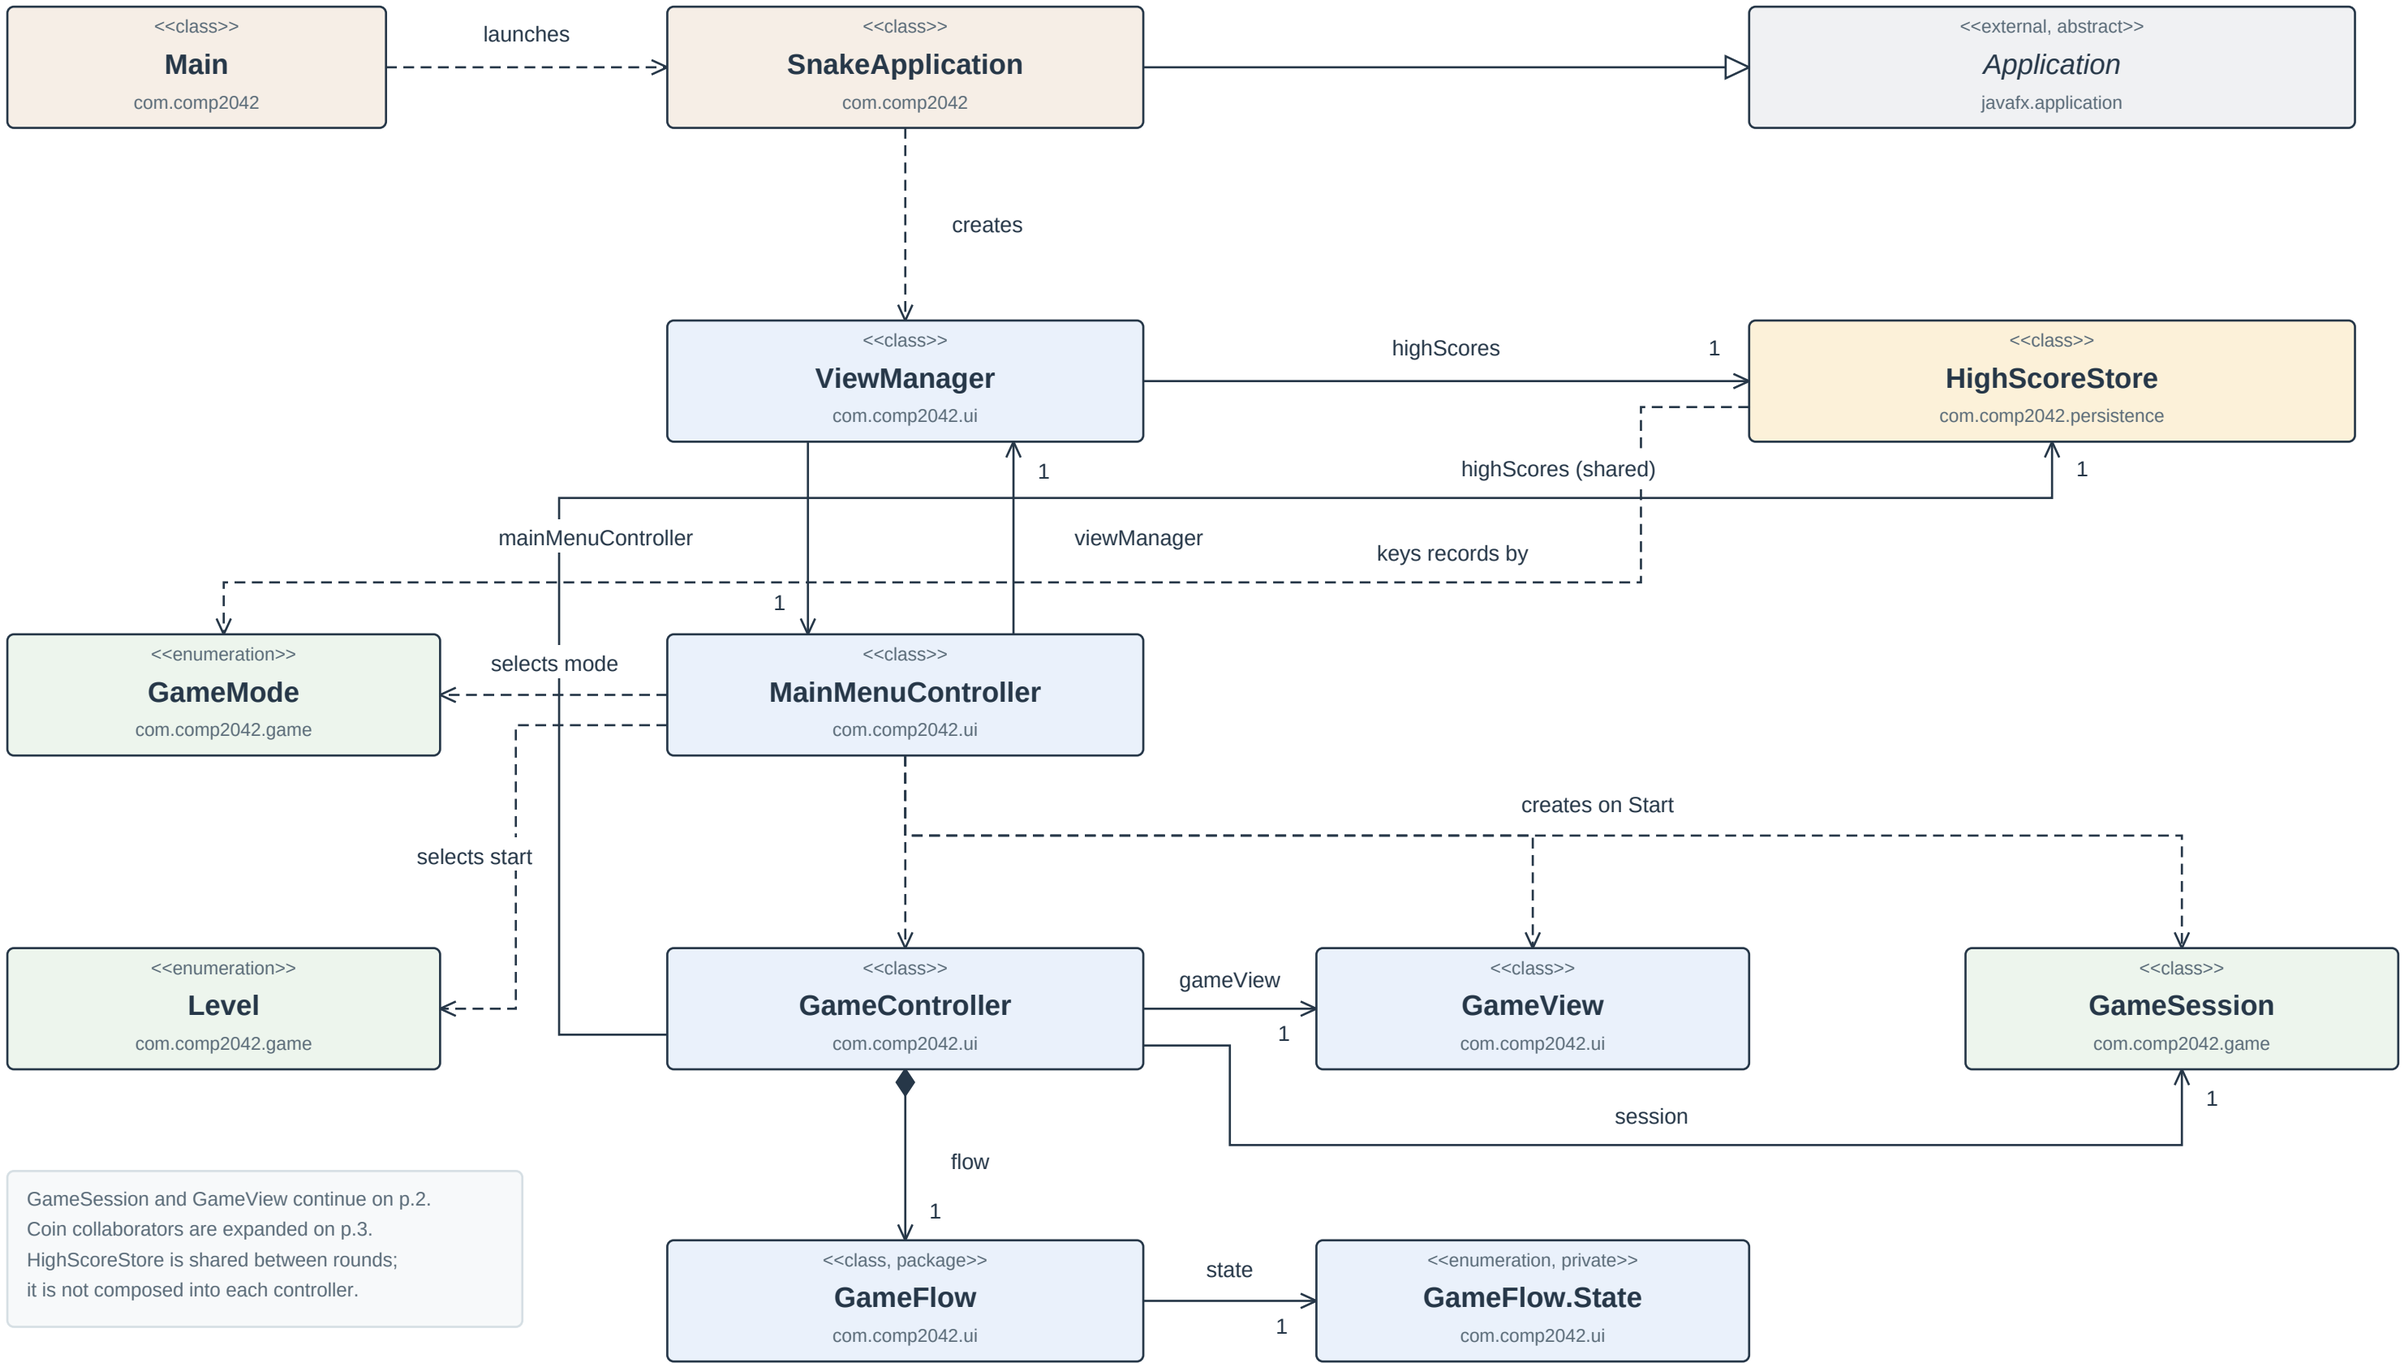

Solid open arrow: retained reference | Filled diamond: exclusive helper/shortcut ownership | Dashed arrow: use/create/return | Hollow triangle: inheritance

Target multiplicities count references per source object. Crossings are not junctions. Repeated classifiers denote the same type across views.

Project classes and nested enums are included. Framework/JDK internals and most method-parameter dependencies are omitted; no project-defined interfaces exist.

Session state, movement and optional shortcuts

Current references and snapshot conversion. Both modes use the same session coordinator.

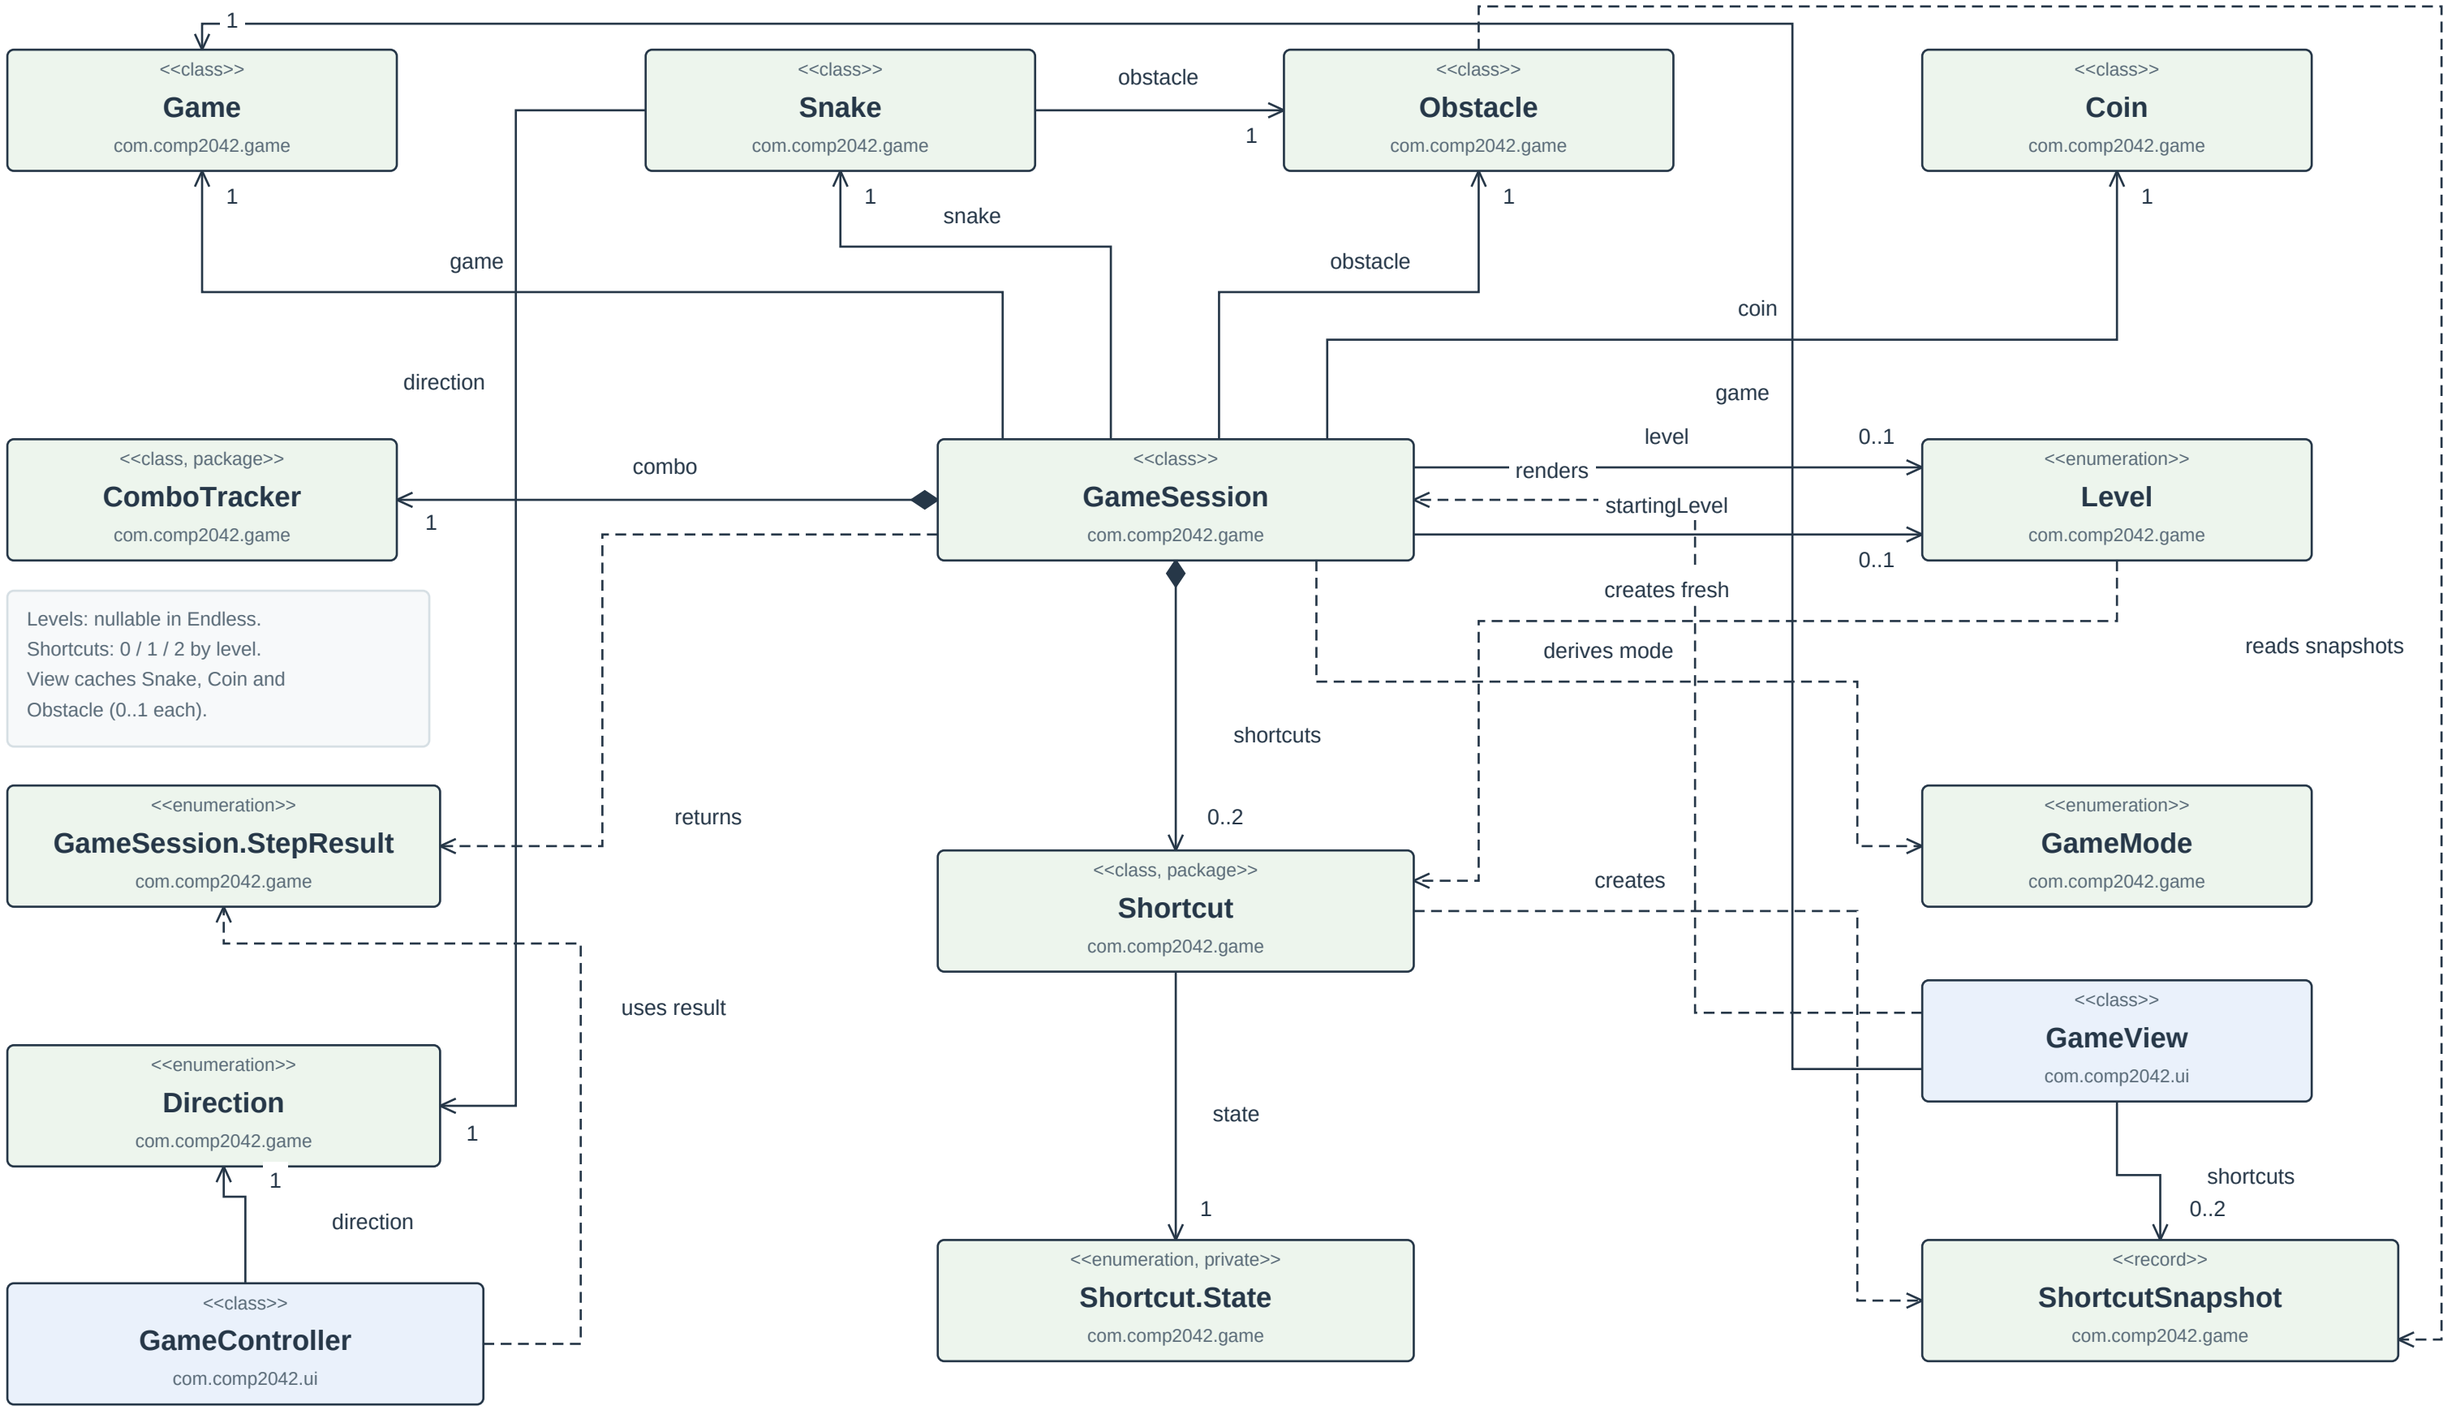

Solid open arrow: retained reference | Filled diamond: exclusive helper/shortcut ownership | Dashed arrow: use/create/return | Hollow triangle: inheritance

Target multiplicities count references per source object. Crossings are not junctions. Repeated classifiers denote the same type across views.

Project classes and nested enums are included. Framework/JDK internals and most method-parameter dependencies are omitted; no project-defined interfaces exist.

Coin construction and polymorphic effects

The concrete Coin class supplies the shared contract; four subclasses override category, value or effect.

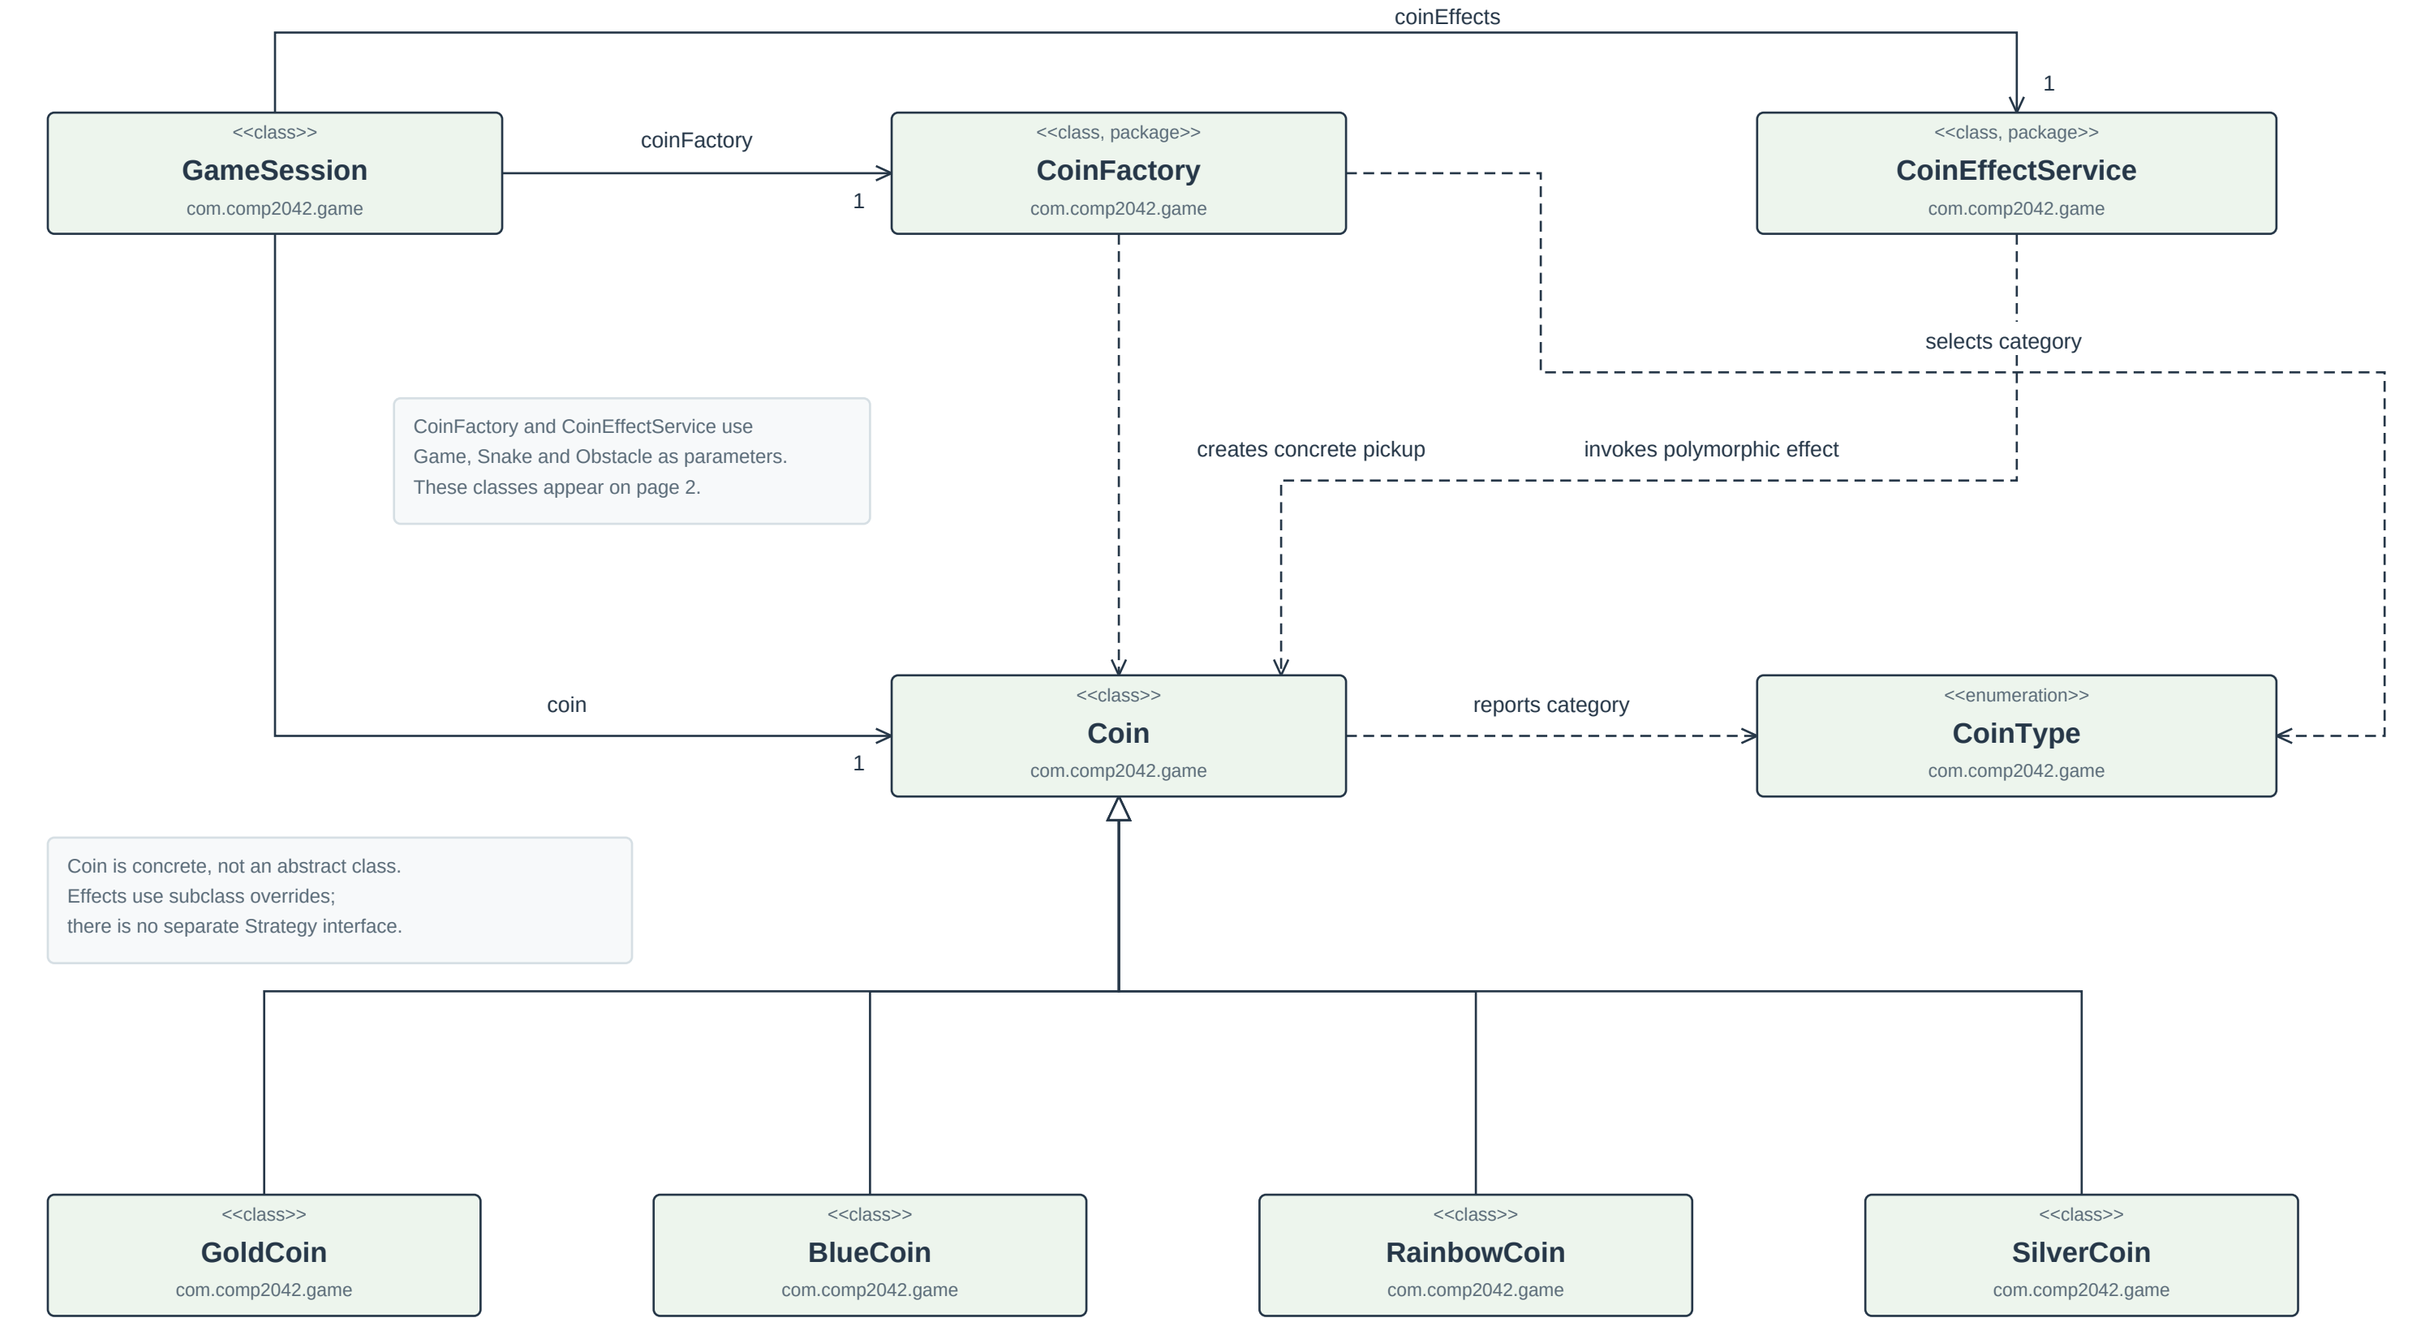

Solid open arrow: retained reference | Filled diamond: exclusive helper/shortcut ownership | Dashed arrow: use/create/return | Hollow triangle: inheritance

Target multiplicities count references per source object. Crossings are not junctions. Repeated classifiers denote the same type across views.

Project classes and nested enums are included. Framework/JDK internals and most method-parameter dependencies are omitted; no project-defined interfaces exist.