
Django Tips

ChillarAnand

Aug 15, 2019

CONTENTS

1	Preface	1
1.1	Why this book?	1
1.2	Who should read this book?	1
1.3	Acknowledgements	1
2	Automatically Register All Models In Admin	3
3	Custom Admin Actions For Querysets & Individual Objects	7
3.1	Custom Actions On Querysets	7
4	Hyperlink Foreignkeys To Its Change View In Admin	11
5	Allow ForeignKey Fields In Admin List Display	15
6	Finding High-impact Performance Bottlenecks	19
7	Dynamic Initial Values In Forms	21
8	Management commands	25
9	Automatically Set CSRF Token in Postman	27
10	Profiling slowest parts of dango	29
11	Log SQL Queries To Console	31
11.1	Using debug-toolbar	31
11.2	Using django-extensions	31
12	ORM Gotchas	35

12.1	Caching	35
12.2	Eager evaluation	35
12.3	Lazy evaluation	35
13	Appendix A	37
13.1	Shell	37
13.2	iPython	38

PREFACE

1.1 Why this book?

blog posts

1.2 Who should read this book?

users

1.3 Acknowledgements

Krace Kumar

Haris Ibrahim

Tim Graham, <https://techytim.com/>

Andrew Godwin, <http://www.aeracode.org/>

Haki Banita

<https://hakibenita.com/>

AUTOMATICALLY REGISTER ALL MODELS IN ADMIN

Inbuilt admin interface is one the most powerful & popular feature of Django. Once we create the models, we need to register them with admin, so that it can read metadata and populate interface for it.

If the django project has too many models or if it has a legacy database, then adding all those models to admin becomes a tedious task. To automate this process, we can programatically fetch all the models in the project and register them with admin.

```
from django.apps import apps

models = apps.get_models()

for model in models:
    admin.site.register(model)
```

This works well if we are just auto registering all the models. However if we register some models with admin using custom admin classes and they try to auto register all models in admin.py files in our apps, there will be conflicts as Django doesn't allow registering the same model twice.

```
from django.apps import apps

from book.models import Book

class BookAdmin(admin.ModelAdmin):
    list_display = ('id', 'name', 'author')
```

(continues on next page)

(continued from previous page)

```
admin.site.register(Book, BookAdmin)

models = apps.get_models()

for model in models:
    admin.site.register(model)
```


So, we need to make sure this auto registration runs after all *admin.py* files are loaded and it should ignore models which are already registered. We can safely hook it in AppConfig.

```
from django.apps import apps, AppConfig
from django.contrib import admin

class BookAppConfig(AppConfig):

    def ready(self):
        models = apps.get_models()
        for model in models:
            try:
                admin.site.register(model)
            except admin.sites.AlreadyRegistered:
                pass
```

Now all models will get registered automatically. If we go to a model page in admin, it will just show objects like this.

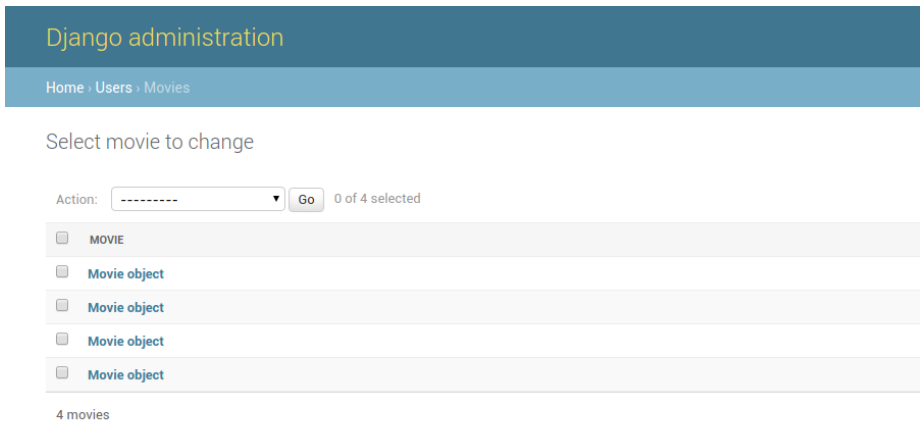

This view is not informative for the users who want to see the data. It will be more informative if we can show all the fields of the model in admin.

To achieve that, we can create a `ListAdminMixin`, which will populate `list_display` with all the fields in the model. We can create a new admin class which will subclass `ListAdminMixin` & `ModelAdmin`.

We can use this new admin class when we are registering the model so that all the fields in the model will show up in the admin.

```
from django.apps import apps, AppConfig
from django.contrib import admin

class ListAdminMixin(object):
    def __init__(self, model, admin_site):
        self.list_display = [field.name for field in
            ↪model._meta.fields if field.name != "id"]
        super(ListAdminMixin, self).__init__(model,
            ↪admin_site)

class CustomApp(AppConfig):

    def ready(self):
        models = apps.get_models()
        for model in models:
            admin_class = type('AdminClass',
            ↪(ListAdminMixin, admin.ModelAdmin), {})

```

(continues on next page)

(continued from previous page)

```
try:
    admin.site.register(model, admin_class)
except admin.sites.AlreadyRegistered:
    pass
```

Now whenever we create a new model or add a new field to an existing model, it will get reflected in the admin automatically.



Select movie to change

Action: 0 of 12 selected


<input type="checkbox"/>	TITLE	ARTIST	INDUSTRY	GENRE	RATING	YOUTUBE URL
<input type="checkbox"/>	Django Unchained	Samuel Jackson	English	Action	7.0	https://www.youtube.com/watch?v=6kw1UVovByw
<input type="checkbox"/>	Fast & Furious 10	Vin Diesel	English	Action	5.0	https://www.youtube.com/watch?v=6kw1UVovByw
<input type="checkbox"/>	Batman Vs Superman: Dawn of Justice	Henry Cavil	English	Action	9.9	https://www.youtube.com/watch?v=6kw1UVovByw

CUSTOM ADMIN ACTIONS FOR QUERYSETS & INDIVIDUAL OBJECTS

3.1 Custom Actions On Querysets

Django provides admin actions which work on a queryset level. By default, django provides delete action in the admin.

In our books admin, we can select a bunch of books and delete them.

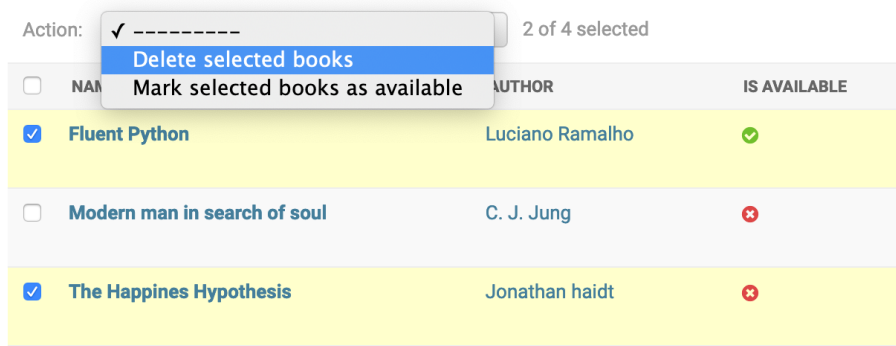


Django provides an option to hook user defined actions to run additional actions on selected items. Let us write a custom admin action to mark selected books as available.

```
def make_books_available(modeladmin, request, queryset):
    queryset.update(is_available=True)
make_books_available.short_description = "Mark selected_
↳ books as available"
```

(continues on next page)

(continued from previous page)

```
class BookAdmin(admin.ModelAdmin):
    actions = (make_books_available,)
    list_display = ('id', 'name', 'author')
```

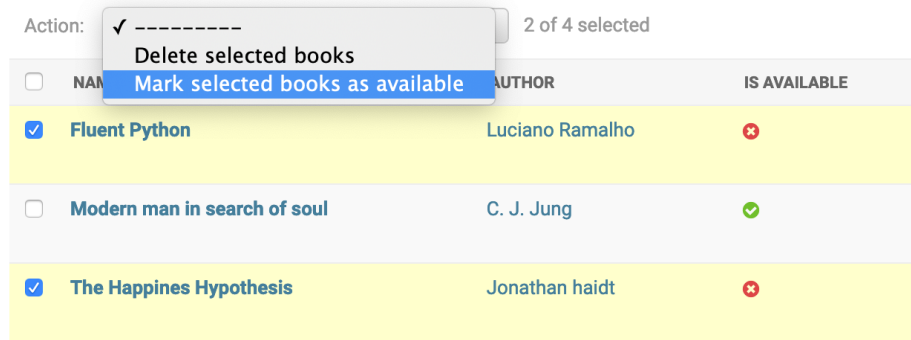

These custom admin actions are efficient when we are taking an action on bulk items. For taking a specific action on single item, using custom actions will be inefficient.

For example, to delete a single user, we need to follow these steps.

First, we have to select that user record.

Next, we have to click on the action dropdown

Next, we have to select delete action

Next, we have to click Go button.

In the next page we have to confirm that we have to delete.

Just to delete a single record, we have to perform 5 clicks. That's too many clicks for a single action.

To simplify the process, we can have delete button at row level. This can be achieved by writing a function which will insert delete button for every record.

```
from django.contrib import admin

from . import models
```

(continues on next page)

(continued from previous page)

```
class ResourceAdmin(admin.ModelAdmin):
    def delete(self, obj):
    ↪ return '<input type="button" value="Delete" onclick=
    ↪ "location.href=\'%s/delete/\'" />'.format(obj.pk)

    delete.allow_tags = True
    delete.short_description = 'Delete object'

    list_display = ('book', 'book_type', 'url', 'delete
    ↪ ')

admin.site.register(models.Book)
```

Now we have an admin with delete button for the records.

To delete an object, just click on delete button and then confirm to delete it. Now, we are deleting objects with just 2 clicks.

We can also have buttons with custom actions. For example, we can add a button which will toggle the active status of an user.



In this chapter, we have seen how to write custom admin actions which work on single item as well as bulk items.

HYPERLINK FOREIGNKEYS TO ITS CHANGE VIEW IN ADMIN

Consider Book model which has Author as foreignkey.

```
from django.db import models

class Author(models.Model):
    name = models.CharField(max_length=100)

class Book(models.Model):
    title = models.CharField(max_length=100)
    author = models.ForeignKey(Author)
```

We can register these models with admin interface as follows.

```
from django.contrib import admin

from .models import Author, Book

class BookAdmin(admin.ModelAdmin):
    list_display = ('name', 'author', )

admin.site.register(Author)
admin.site.register(Book, BookAdmin)
```

Once they are registered, admin page shows Book model like this.

Django administration

Home › Book › Books

Select book to change

Action: 0 of 2 selected

<input type="checkbox"/>	NAME	AUTHOR
<input type="checkbox"/>	Chalam	Chalam
<input type="checkbox"/>	The stranger	Albert Camus

2 books

While browsing books, we can see book name and author name. Here, book name field is linked to book change view. But author field is shown as plain text.

If we have to modify author name, we have to go back to authors admin page, search for relevant author and then change name.

This becomes tedious if users spend lot of time in admin for tasks like this. Instead, if author field is hyperlinked to author change view, we can directly go to that page and change the name.

Django provides an option to access admin views by its URL reversing system. For example, we can get change view of author model in book app using `reverse("admin:book_author_change", args=id)`. Now we can use this url to hyperlink author field in book admin.

```
from django.contrib import admin
from django.utils.safestring import mark_safe

class BookAdmin(admin.ModelAdmin):
    list_display = ('name', 'author_link', )

    def author_link(self, book):
        url = reverse("admin:book_author_change",
↪args=[book.author.id])
        link = '<a href="%s">%s</a>' % (url, book.author.
↪name)
```

(continues on next page)

(continued from previous page)

```
return mark_safe(link)
author_link.short_description = 'Author'
```

Now in the book admin view, author field will be hyperlinked to its change view and we can visit just by clicking it.

Depending on requirements, we can link any field in django to other fields or add custom fields to improve productivity of users in admin.

Custom hyper links

<https://docs.djangoproject.com/en/dev/ref/models/instances/#get-absolute-url>

ALLOW FOREIGNKEY FIELDS IN ADMIN LIST DISPLAY

Django admin has *ModelAdmin* class which provides options and functionality for the models in admin interface. It has options like *list_display*, *list_filter*, *search_fields* to specify fields for corresponding actions.

search_fields, *list_filter* and other options allow to include a ForeignKey or ManyToMany field with lookup API follow notation. For example, to search by book name in Bestselleradmin, we can specify *book__name* in search fields.

```
from django.contrib import admin

from book.models import Bestseller

class BestsellerAdmin(RelatedFieldAdmin):
    search_fields = ('book__name', )
    list_display = ('id', 'year', 'rank', 'book')

admin.site.register(Bestseller, BestsellerAdmin)
```

However Django doesn't allow the same follow notation in *list_display*. To include ForeignKey field or ManyToMany field in the list display, we have to write a custom method and add this method in list display.

```
from django.contrib import admin

from book.models import Bestseller
```

(continues on next page)

(continued from previous page)

```
class BestsellerAdmin(RelatedFieldAdmin):
    list_display = ('id', 'rank', 'year', 'book', 'author
    ↪')
    search_fields = ('book__name', )

    def author(self, obj):
        return obj.book.author
    author.description = 'Author'

admin.site.register(Bestseller, BestsellerAdmin)
```

This way of adding foreignkeys in `list_display` becomes tedious when there are lots of models with foreignkey fields.

We can write a custom admin class to dynamically set the methods as attributes so that we can use the `ForeignKey` fields in `list_display`.

```
def get_related_field(name, admin_order_field=None, ↪
    ↪short_description=None):
    related_names = name.split('__')

    def dynamic_attribute(obj):
        for related_name in related_names:
            obj = getattr(obj, related_name)
        return obj

    dynamic_attribute.admin_order_field = admin_order_
    ↪field or name
    dynamic_attribute.short_description = short_
    ↪description or related_names[-1].title().replace('_',
    ↪')
    return dynamic_attribute

class RelatedFieldAdmin(admin.ModelAdmin):
    def __getattr__(self, attr):
        if '__' in attr:
            return get_related_field(attr)

    # not dynamic lookup, default behaviour
```

(continues on next page)

(continued from previous page)

```
        return self.__getattr__(attr)

class BestSellerAdmin(RelatedFieldAdmin):
    list_display = ('id', 'rank', 'year', 'book', 'book__
    ↪author')
```

By subclassing `RelatedFieldAdmin`, we can directly use foreignkey fields in list display.

However, this will lead to N+1 problem. We will discuss more about this and how to fix this in orm optimizations chapter.

FINDING HIGH-IMPACT PERFORMANCE BOTTLENECKS

When optimizing performance of web application, a common mistake is to start with optimizing the slowest page(or API). In addition to considering response time, we should also consider the traffic it is receiving to prioritize the order of optimization.

In this article we will profile a django webapp, find high-impact performance bottlenecks and then start optimization them to yield better performance. Profiling

django-silk is an open source profiling tool which intercepts and stores HTTP requests data. Install it with pip.

pip install django-silk

Add silk to installed apps and include silk middleware in django settings.

```
MIDDLEWARE = [ ... 'silk.middleware.SilkyMiddleware', ...
```

```
]
```

```
INSTALLED_APPS = ( ... 'silk'
```

```
)
```

Run migrations so that Silk can create required database tables to store profile data.

```
$ python manage.py makemigrations $ python manage.py migrate $ python  
manage.py collectstatic
```

Include silk urls in root urlconf to view the profile data.

```
urlpatterns += [url(r'^silk/', include('silk.urls', namespace='silk'))]
```

On silk requests page(<http://host/silk/requests/>), we can see all requests and sort them by overall time or time spent in database.

High Impact Bottlenecks

Silk creates silk_request table which contains information about the requests processed by django.

```
$ pgcli
```

```
library> d silk_request;
```

```
...
```

We can group these requests data by path, calculate number of requests, average time taken and impact factor of each path. Since we are considering response time and traffic, impact factor will be product of average response time and number of requests for that path.

```
library> SELECT
```

```
    s.*, round((s.avg_time * s.count)/max(s.avg_time*s.count)
over ()):NUMERIC,2) as impact
```

```
FROM (select path, round(avg(time_taken)::numeric,2) as avg_time,
count(path) as count from silk_request group by PATH) s
```

```
ORDER BY impact DESC;
```

```
...
```

We can see /point/book/book/ has highest impact even though it is neither most visited nor slowest view. Optimizing this view first yields in overall better performance of webapp. Conclusion

In this article, we learnt how to profile django webapp and identify bottlenecks to improve performance. In the next article, we will learn how to optimize these bottlenecks by taking an in-depth look at them.

```
paas
```

```
iaas
```

```
ec2
```

```
home
```


DYNAMIC INITIAL VALUES IN FORMS

Django form fields accept initial argument. So You can set a default value for a field.

```
In [1]: from django import forms

In [2]: class SampleForm(forms.Form):
...:     name = forms.CharField(max_length=10,
↳initial='avil page')
...:

In [3]: f = SampleForm()

In [4]: f.as_p()
Out[4]: u'<p>Name: <input maxlength="10" name="name"
↳type="text" value="avil page" /></p>'
```

Sometimes it is required to override init method in forms and set field initial arguments.

```
In [11]: from django import forms

In [12]: class AdvancedForm(forms.Form):
...:
...:     def __init__(self, *args, **kwargs):
...:         super().__init__(*args, **kwargs)
...:         self.fields['name'].initial = 'override'
...:
...:         name=forms.CharField(max_length=10)
...:
```

(continues on next page)

(continued from previous page)

```
In [13]: f2 = AdvancedForm()

In [14]: f2.as_p()
Out[14]: '<p>Name: <input maxlength="10" name="name"
↳ type="text" value="override" /></p>'
```

Now let's pass some initial data to form and see what happens.

```
In [11]: from django import forms

In [12]: class AdvancedForm(forms.Form):
.....:
.....:     def __init__(self, *args, **kwargs):
.....:         super().__init__(*args, **kwargs)
.....:         self.fields['name'].initial = 'override'
↳ # don't try this at home
.....:
.....:         name=forms.CharField(max_length=10)
.....:

In [19]: f3 = AdvancedForm(initial={'name': 'precedence'})
↳

In [20]: f3.as_p()
Out[20]: '<p>Name: <input maxlength="10" name="name"
↳ type="text" value="precedence" /></p>'
```

If You look at the value of input field, it's is NOT the overridden. It still has form initial value!

If You look into source code of django forms to find what is happening, You will find this.

```
data = self.field.bound_data(
    self.data,
    self.form.initial.get(self.name, self.field.
↳ initial) # precedence matters!!!!
)
```

So form's initial value has precedence over fields initial values.

So You have to override form's initial value instead of fields's initial value to make it work as expected.

```
In [21]: from django import forms

In [22]: class AdvancedForm(forms.Form):
        ....:
        ....:     def __init__(self, *args, **kwargs):
        ....:         super().__init__(*args, **kwargs)
        ....:         self.initial['name'] = 'override' # aha!
        ↪!!!
        ....:
        ....:         name=forms.CharField(max_length=10)
        ....:

In [23]: f4 = AdvancedForm(initial={'name': 'precedence'})
        ↪)

In [24]: f4.as_p()
Out[24]: '<p>Name: <input maxlength="10" name="name"
        ↪type="text" value="override" /></p>'
```

Management command initial value

models initial value dict={ }

MANAGEMENT COMMANDS

ram .iterator()

cpu cron job frequent restarts

AUTOMATICALLY SET CSRF TOKEN IN POSTMAN

Django has inbuilt CSRF protection mechanism for requests via unsafe methods to prevent Cross Site Request Forgeries. When CSRF protection is enabled on AJAX POST methods, X-CSRFToken header should be sent in the request.

Postman is one of the widely used tool for testing APIs. In this article, we will see how to set csrf token and update it automatically in Postman. CSRF Token In Postman

Django sets csrftoken cookie on login. After logging in, we can see the csrf token from cookies in the Postman.

We can grab this token and set it in headers manually.

But this token has to be manually changed when it expires. This process becomes tedious to do it on an expiration basis.

Instead, we can use Postman scripting feature to extract token from cookie and set it to an environment variable. In Test section of postman, add these lines.

```
var  xsrfCookie  =  postman.getResponseCookie("csrftoken");  post-  
man.setEnvironmentVariable('csrftoken', xsrfCookie.value);
```

This extracts csrf token and sets it to an environment variable called csrftoken in the current environment.

Now in our requests, we can use this variable to set the header.

When the token expires, we just need to login again and csrf token gets updated automatically. Conclusion

In this article we have seen how to set and renew csrftoken automatically in Postman. We can follow similar techniques on other API clients like CURL or

httpie to set csrf token.

Django Tips & Tricks #7 - Django Auth Plugin For HTTPie

HTTPie is an alternative to curl for interacting with web services from CLI. It provides a simple and intuitive interface and it is handy to send arbitrary HTTP requests while testing/debugging APIs.

When working with web applications that require authentication, using httpie is difficult as authentication mechanism will be different for different applications. httpie has in built support for basic & digest authentication.

To authenticate with Django apps, a user needs to make a GET request to login page. Django sends login form with a CSRF token. User can submit this form with valid credentials and a session will be initiated.

Establish session manually is boring and it gets tedious when working with multiple apps in multiple environments(development, staging, production).

I have written a plugin called httpie-django-auth which automates django authentication. It can be installed with pip

```
pip install httpie-django-auth
```

By default, it uses /admin/login to login. If you need to use some other URL for logging, set HTTPIE_DJANGO_AUTH_URL environment variable.

```
export HTTPIE_DJANGO_AUTH_URL='/accounts/login/'
```

Now you can send authenticated requests to any URL as

```
http :8000/profile -A=django -auth='username:password'
```


PROFILING SLOWEST PARTS OF DANGO

```
./manage.py runcprofileserver
```


LOG SQL QUERIES TO CONSOLE

Django ORM makes easy to interact with database. To understand what is happening behind the scenes or to see SQL performance, we can log all the SQL queries that are being executed. In this article, we will see various ways to achieve this.

11.1 Using debug-toolbar

Django debug toolbar provides panels to show debug information about requests. It has SQL panel which shows all executed SQL queries and time taken for them.

When building REST APIs or micro services where django templating engine is not used, this method won't work. In these situations, we have to log SQL queries to console.

11.2 Using django-extensions

Django-extensions provides lot of utilities for productive development. For `runserver_plus` and `shell_plus` commands, it accepts an optional `-print-sql` argument, which prints all the SQL queries that are being executed.

`./manage.py runserver_plus -print-sql` `./manage.py shell_plus -print-sql` Whenever an SQL query gets executed, it prints the query and time taken for it in console.

In [42]: `User.objects.filter(is_staff=True)` Out[42]: `SELECT "auth_user"."id",`

```
“auth_user”.”password”,
“auth_user”.”last_login”,
“auth_user”.”is_superuser”,
“auth_user”.”username”,
“auth_user”.”first_name”,
“auth_user”.”last_name”,
“auth_user”.”email”, “auth_user”.”is_staff”,
“auth_user”.”is_active”,
“auth_user”.”date_joined”
```

```
FROM “auth_user”
```

```
WHERE “auth_user”.”is_staff” = true LIMIT 21
```

Execution time: 0.002107s [Database: default]

<QuerySet [<User: anand>, <User: chillar>]> Using django-querycount
Django-querycount provides a middleware to show SQL query count and show duplicate queries on console.

```
|-----|-----|-----|-----|-----| | Type | Database | Reads
| Writes | Totals | Duplicates | |-----|-----|-----|-----|
|-----| | RESP | default | 3 | 0 | 3 | 1 | |-----|-----|-----|
-----|-----| Total queries: 3 in 1.7738s
```

Repeated 1 times. SELECT “django_session”.”session_key”,
“django_session”.”session_data”, “django_session”.”expire_date”
FROM “django_session” WHERE (“django_session”.”session_key”
= ‘dummy_key AND “django_session”.”expire_date” > ‘2018-05-31T09:38:56.369469+00:00’:timestampz) This package provides additional settings to customize output.

Django logging Instead of using any 3rd party package, we can use django.db.backends logger to print all the SQL queries.

Add django.db.backends to loggers list and set log level and handlers.

```
‘loggers’: {
    ‘django.db.backends’: { ‘level’: ‘DEBUG’, ‘handlers’:
        [‘console’, ],
    },
}
```

In runserver console, we can see all SQL queries that are being executed.

```
(0.001)          SELECT          "django_admin_log"."id",
"django_admin_log"."action_time",      "django_admin_log"."user_id",
"django_admin_log"."content_type_id",    "django_admin_log"."object_id",
"django_admin_log"."object_repr",      "django_admin_log"."action_flag",
"django_admin_log"."change_message",    "auth_user"."id",
"auth_user"."password", "auth_user"."last_login", "auth_user"."is_superuser",
"auth_user"."username", "auth_user"."first_name", "auth_user"."last_name",
"auth_user"."email",      "auth_user"."is_staff",      "auth_user"."is_active",
"auth_user"."date_joined",      "django_content_type"."id",
"django_content_type"."app_label",      "django_content_type"."model"
FROM    "django_admin_log" INNER JOIN "auth_user" ON
("django_admin_log"."user_id" = "auth_user"."id") LEFT OUTER JOIN
"django_content_type" ON ("django_admin_log"."content_type_id" =
"django_content_type"."id") WHERE "django_admin_log"."user_id" = 4
ORDER BY "django_admin_log"."action_time" DESC LIMIT 10; args=(4,)
[2018/06/03 15:06:59] HTTP GET /admin/ 200 [1.69, 127.0.0.1:47734] These
are few ways to log all SQL queries to console. We can also write a custom
middleware for better logging of these queries and get some insights.
```


ORM GOTCHAS

N+1 Queries

12.1 Caching

12.2 Eager evaluation

12.3 Lazy evaluation

`book.author.id` `book.author_id`

`qs.exists()`

`.iterator()`

bulk operations

bulk update wont call save or signals Runpython wont call these

get only what you need

`values_list()`

enable query logging

APPENDIX A

13.1 Shell

zsh/fish

aliases

auto completion

Developers and hackers prefer using terminal and spend a lot of time on it. Instead of typing long commands over and over, they can be aliased to shortnames. The shell builtin alias allows users to set aliases.

One of the most used command while setting up development environment is pip install -r requirements.txt This can be aliased to pir.

alias pir='pip install -r requirements.txt' Now to install requirements, type pir and pressing enter. Here are some other aliases related to python which will be useful on a daily basis.

```
alias py='python' alias ipy='ipython' alias py3='python3' alias  
ipy3='ipython3'
```

```
alias jn='jupyter notebook'
```

```
alias wo='workon' alias pf='pip freeze | sort' alias pi='pip install' alias  
pun='pip uninstall'
```

```
alias dj='python manage.py' alias drs='python manage.py runserver' alias  
drp='python manage.py runserverplus' alias dsh='python manage.py shell'  
alias dsp='python manage.py shell_plus' alias dsm='python manage.py  
schemamigration' alias dm='python manage.py migrate' alias dmm='python
```

`manage.py makemigrations`” alias `ddd=`”python manage.py dumpdata” alias `dld=`”python manage.py loaddata” alias `dt=`”python manage.py test” Just add the above aliases to your `~/bashrc` or `~/zshrc`. That’s it. Hpy alsng!

13.2 iPython

init file

auto reload