

Experiment No. 7 Implement Booth's algorithm using c
Name: Chirag Deepak Raut
Roll Number: 50
Date of Performance:
Date of Submission:

Aim: To implement Booth's algorithm using c-programming.

Objective -


To understand the working of Booths algorithm.

To understand how to implement Booth's algorithm using c-programming.

Theory:

Booth's algorithm is a multiplication algorithm that multiplies two signed binary numbers in 2's complement notation. Booth used desk calculators that were faster at shifting than adding and created the algorithm to increase their speed. The algorithm works as per the following conditions :

1. If Q_n and Q_{n-1} are same i.e. 00 or 11 perform arithmetic shift by 1 bit.
2. If $Q_n Q_{n-1} = 10$ do $A = A - B$ and perform arithmetic shift by 1 bit.
3. If $Q_n Q_{n-1} = 01$ do $A = A + B$ and perform arithmetic shift by 1 bit.

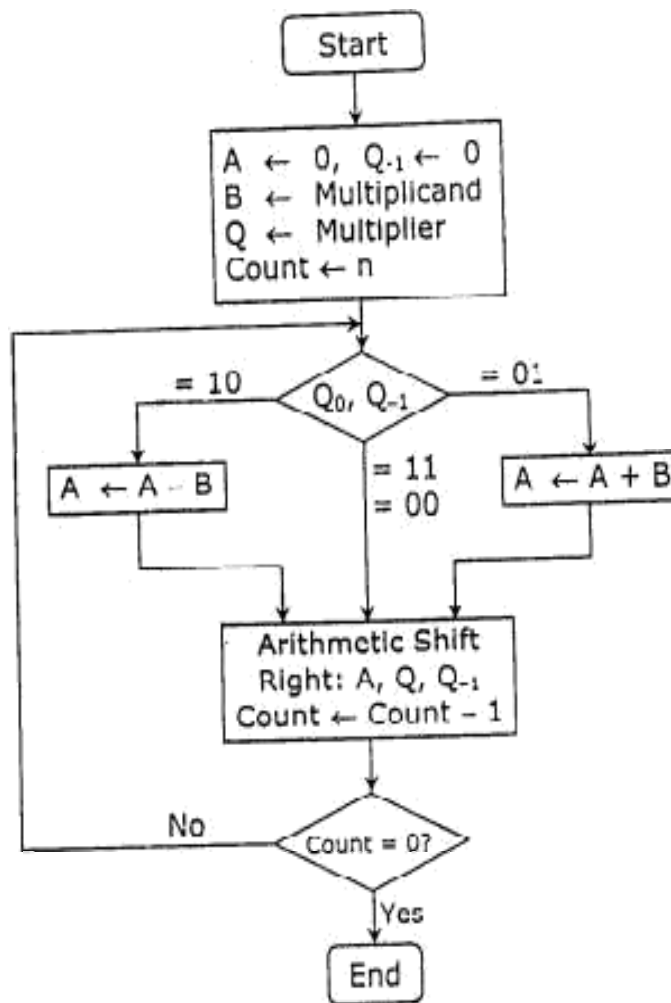

Multiplicand (B) ← 0 1 0 1 (5), Multiplier (Q) ← 0 1 0 0 (4)				
Steps	A	Q	Q ₋₁	Operation
	0 0 0 0	0 1 0 0	0	Initial
Step 1 :	0 0 0 0	0 0 1 0	0	Shift right
Step 2 :	0 0 0 0	0 0 0 1	0	Shift right
Step 3 :	1 0 1 1	0 0 0 1	0	A ← A - B
	1 1 0 1	1 0 0 0	1	Shift right
Step 4 :	0 0 1 0	1 0 0 0	1	A ← A + B
	0 0 0 1	0 1 0 0	0	Shift right
Result	0 0 0 1 0 1 0 0 = +20			

Program:

```
#include <math.h>
```

```
int a = 0, b = 0, c = 0, a1 = 0, b1 = 0, com[5] = { 1, 0, 0, 0, 0};
int anum[5] = {0}, anumcp[5] = {0}, bnum[5] = {0};
int acomp[5] = {0}, bcomp[5] = {0}, pro[5] = {0}, res[5] = {0};
```

```
void binary(){
    a1 = fabs(a);
    b1 = fabs(b);
    int r, r2, i, temp;
    for (i = 0; i < 5; i++){
        r = a1 % 2;
        a1 = a1 / 2;
        r2 = b1 % 2;
        b1 = b1 / 2;
        anum[i] = r;
        anumcp[i] = r;
        bnum[i] = r2;
        if(r2 == 0){
            bcomp[i] = 1;
        }
        if(r == 0){
            acomp[i] = 1;
        }
    }
}
```

```

    }

    c = 0;
    for ( i = 0; i < 5; i++){
        res[i] = com[i]+ bcomp[i] + c;
        if(res[i] >= 2){
            c = 1;
        }
        else
            c = 0;
        res[i] = res[i] % 2;
    }
    for (i = 4; i >= 0; i--){
        bcomp[i] = res[i];
    }

    if (a < 0){
        c = 0;
        for (i = 4; i >= 0; i--){
            res[i] = 0;
        }
        for ( i = 0; i < 5; i++){
            res[i] = com[i] + acomp[i] + c;
            if (res[i] >= 2){
                c = 1;
            }
            else
                c = 0;
            res[i] = res[i]%2;
        }
        for (i = 4; i >= 0; i--){
            anum[i] = res[i];
            anumcp[i] = res[i];
        }
    }

    if(b < 0){
        for (i = 0; i < 5; i++){
            temp = bnum[i];
            bnum[i] = bcomp[i];

```

```

        bcomp[i] = temp;
    }
}
}
void add(int num[]){
    int i;
    c = 0;
    for ( i = 0; i < 5; i++){
        res[i] = pro[i] + num[i] + c;
        if (res[i] >= 2){
            c = 1;
        }
        else{
            c = 0;
        }
        res[i] = res[i]%2;
    }
    for (i = 4; i >= 0; i--){
        pro[i] = res[i];
        printf("%d",pro[i]);
    }
    printf(":");
    for (i = 4; i >= 0; i--){
        printf("%d", anumcp[i]);
    }
}
void arshift(){
    int temp = pro[4], temp2 = pro[0], i;
    for (i = 1; i < 5 ; i++){
        pro[i-1] = pro[i];
    }
    pro[4] = temp;
    for (i = 1; i < 5 ; i++){
        anumcp[i-1] = anumcp[i];
    }
    anumcp[4] = temp2;
    printf("\nAR-SHIFT: ");
    for (i = 4; i >= 0; i--){
        printf("%d",pro[i]);
    }
}

```

```

    printf(":");
    for(i = 4; i >= 0; i--){
        printf("%d", anumcp[i]);
    }
}

void main(){
int i, q = 0;
    printf("\t\tBOOTH'S MULTIPLICATION
    ALGORITHM"); printf("\nEnter two numbers to
    multiply: "); printf("\nBoth must be less than 16");
    //simulating for two numbers each below 16
    do{
        printf("\nEnter A: ");
        scanf("%d",&a);
        printf("Enter B: ");
        scanf("%d", &b);
    }while(a >=16 || b >=16);

    printf("\nExpected product = %d", a * b);
    binary();
    printf("\n\nBinary Equivalents are: ");
    printf("\nA = ");
    for (i = 4; i >= 0; i--){
        printf("%d", anum[i]);
    }
    printf("\nB = ");
    for (i = 4; i >= 0; i--){
        printf("%d", bnum[i]);
    }
    printf("\nB'+ 1 = ");
    for (i = 4; i >= 0; i--){
        printf("%d", bcomp[i]);
    }
    printf("\n\n");
    for (i = 0; i < 5; i++){
        if (anum[i] == q){
            printf("\n-->");
            arshift();
            q = anum[i];

```

```

    }
    else if(anum[i] == 1 && q == 0){
        printf("\n-->");
        printf("\nSUB B: ");
        add(bcomp);
        arshift();
        q = anum[i];
    }
    else{
        printf("\n-->");
        printf("\nADD B: ");
        add(bnum);
        arshift();
        q = anum[i];
    }
}

printf("\nProduct is = ");
for (i = 4; i >= 0; i--){
    printf("%d", pro[i]);
}
for (i = 4; i >= 0; i--){
    printf("%d", anumcp[i]);
}
}

```

Output:

OUTPUT:-

BOOTH'S MULTIPLICATION ALGORITHM

Enter two numbers to multiply: Both must be less than 16

Enter A: 10

Enter B: 2

Expected product = 20

Binary Equivalents are:

A = 01010

B = 00010

B'+ 1 = 11110

```

-->
AR-SHIFT: 00000:00101
-->
SUB B: 11110:00101
AR-SHIFT: 11111:00010
-->
ADD B: 00001:00010
AR-SHIFT: 00000:10001
-->
SUB B: 11110:10001
AR-SHIFT: 11111:01000
-->
ADD B: 00001:01000
AR-SHIFT: 00000:10100
Product is = 0000010100

```

Conclusion -

This experiment with Booth's algorithm has highlighted its significance in optimizing binary multiplication. Booth's algorithm efficiently reduces the number of partial products and minimizes the overall number of operations required for multiplication. This not only enhances computational speed but also reduces hardware complexity. Booth's algorithm is a powerful tool for optimizing multiplication processes and is an essential concept in digital arithmetic. Our experiment has successfully demonstrated its practical applicability in computer architecture and digital circuit design.