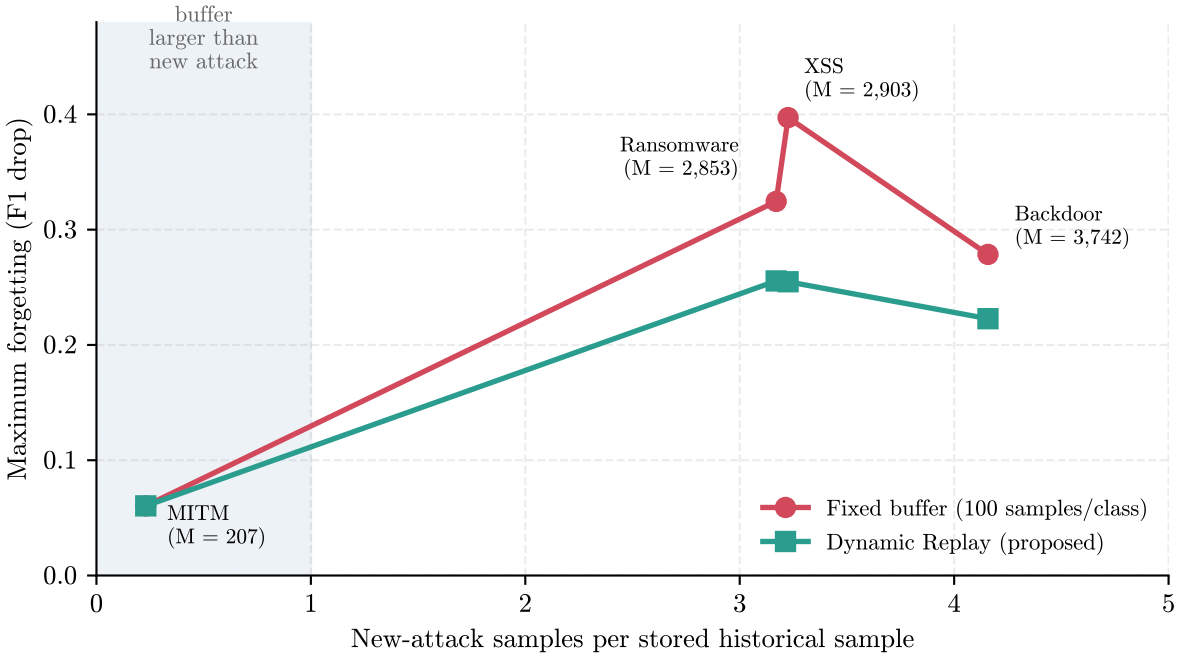
buffer
larger than
new attack
XSS
(M = 2,903)
Ransomware
(M = 2,853)
Backdoor
(M = 3,742)
MITM
(M = 207)
Fixed buffer (100 samples/class)
Dynamic Replay (proposed)
Maximum forgetting (F1 drop)
0.0
0.1
0.2
0.3
0.4
0
1
2
3
4
5
New-attack samples per stored historical sample