






Create a Web Application Project

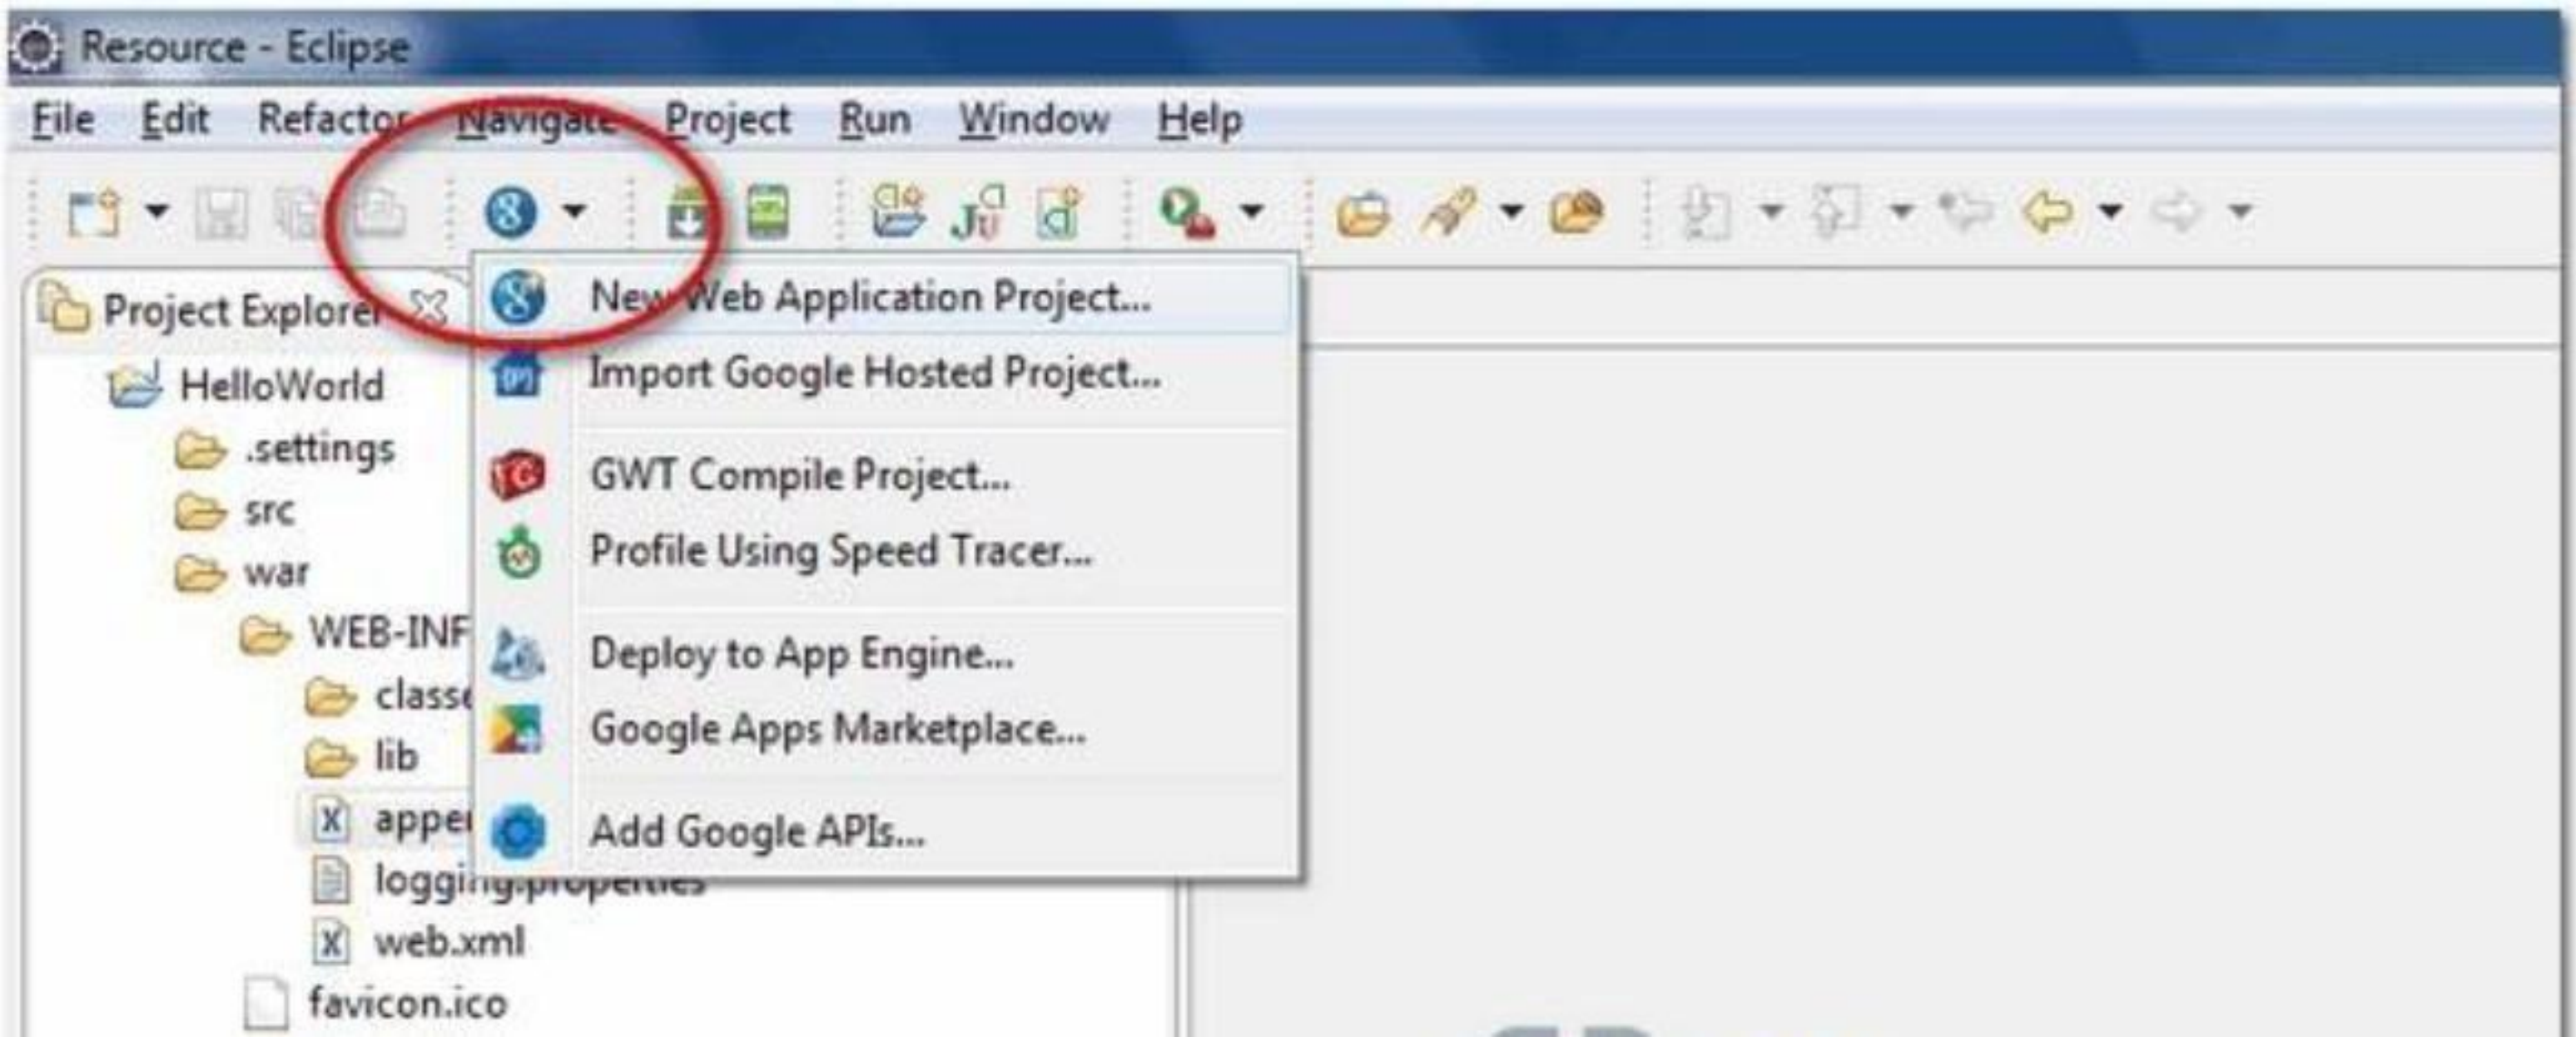

Create a Web Application project in the workspace or in an external location

Project name:

Package: (e.g. com.example.myproject)

Location

☒ Create new project in workspace

☐ Create new project in:

Directory:

[Browse...](#)

Google SDKs

☐ Use Google Web Toolkit

☒ Use default SDK (none)

[Configure SDKs...](#)

☐ Use specific SDK:

☒ Use Google App Engine

☒ Use default SDK (appengine-java-sdk-1.6.3.1 - 1.6.3)

[Configure SDKs...](#)

☐ Use specific SDK:


The project will use App Engine's [High Replication Datastore \(HRD\)](#) by default.

Google Apps Marketplace

☐ Add support for listing on Google Apps Marketplace

Sample Code

☒ Generate project sample code

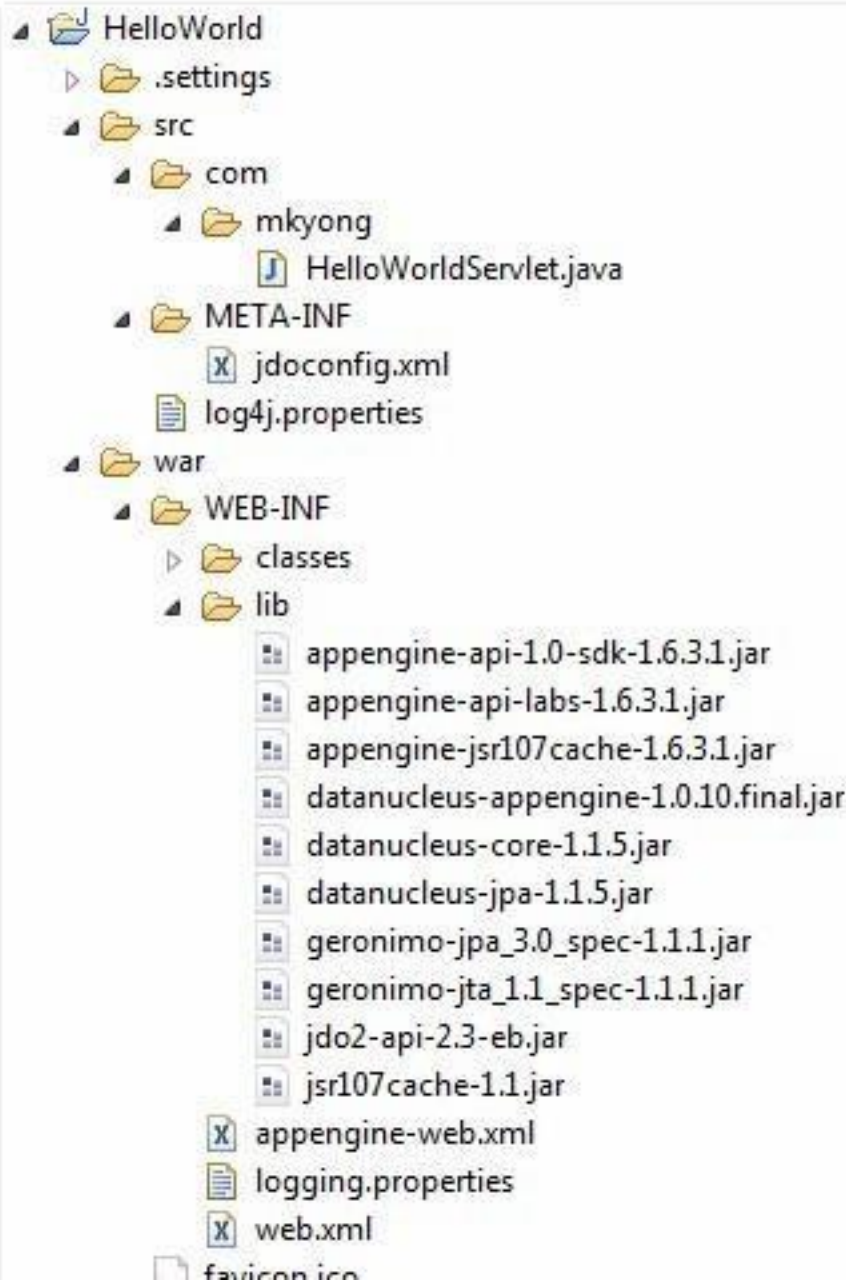

Hello App Engine

localhost:8888

Hello App Engine!

Available Servlets:

[HelloWorld](#)

localhost:8888/helloworld

localhost:8888/helloworld

Hello, world

File Edit Refactor Source Refactor Navigate Search Project Run Window Help



Project Explorer

HelloWorld

.settings

src

com

mkyong

H

META-INF

jdock

log4j.properties

war

WEB-INF

classes

- New Web Application Project...
- Import Google Hosted Project...
- GWT Compile Project...
- Profile Using Speed Tracer...
- Deploy to App Engine...
- Google Apps Marketplace...
- Add Google APIs...

appengine-web.xml

```

1  <?xml version="1.0" encoding="UTF-8" ?>
2  <appengine-web-app xmlns="http://appengine.google.com"
3      <application>mkyong
4      <version>1</version>
5
6  <!--
7      By default, App Engine automatically generates a
8      To allow App Engine to use the default
9
10     <threadsafe>true
11     -->
12
13     <!-- Configure java
14     <system-properties>

```



Deploy

 Ready to deploy application 'mkyong123', version 1



Project: HelloWorld

[Browse...](#)

Select the frontend and backends to deploy:

[Learn more](#)

☒ Frontend

[App Engine project settings...](#)

Hello App Engine

← → ↻  mkyong123.appspot.com



Hello App Engine!

Available Servlets:

[HelloWorld](#)