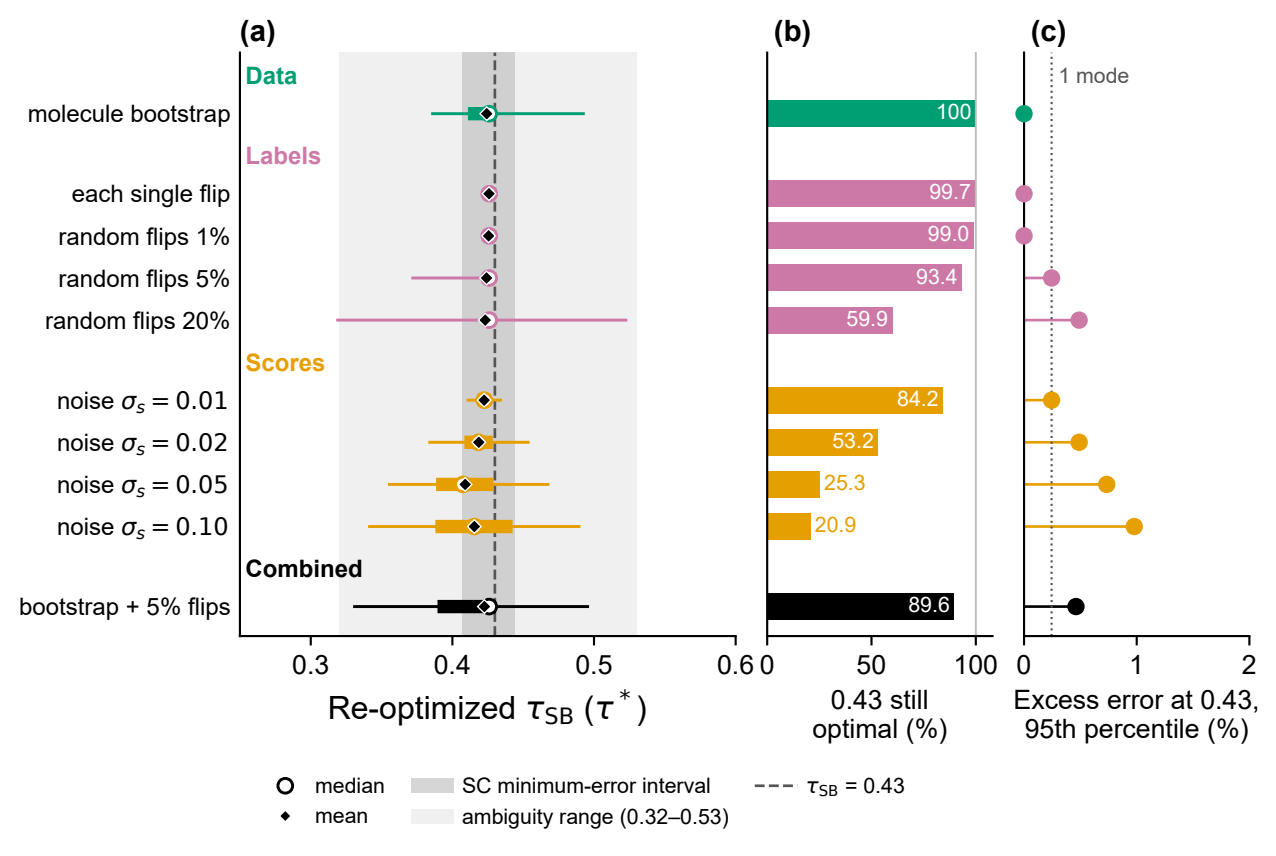

(a)
(b)
(c)
Data
molecule bootstrap
Labels
each single flip
random flips 1%
random flips 5%
random flips 20%
Scores
noise $\sigma_s = 0.01$
noise $\sigma_s = 0.02$
noise $\sigma_s = 0.05$
noise $\sigma_s = 0.10$
Combined
bootstrap + 5% flips
100
99.7
99.0
93.4
59.9
84.2
53.2
25.3
20.9
89.6
1 mode
0.3
0.4
0.5
0.6
0
50
100
0
1
2
Re-optimized τ_{SB} (τ^*)
0.43 still optimal (%)
Excess error at 0.43, 95th percentile (%)
median
mean
SC minimum-error interval
ambiguity range (0.32–0.53)
τ_{SB} = 0.43