Experiment to Simplify Symbol Tx Using Readable URIs

TANAKA SENKI

田中　直行

Backgrounds

- We don't pay for goods at asking prices; we mostly just pay according to the invoice.
- Due to blockchain's requirement that “we can't move goods without signing,” pull-based financial models like subscriptions cannot be implemented.

⇒ We need to create as simple an invoice as possible and build transactions using it.

Structure of Symbol's Tx

- Handling serialized information involves far too much data, so we'll omit the signature this time.
- However, with at minimum
  - a Network Type
  - Address
  - Mosaic (Id, Amount, and Divisibility as a bonus),
- it is possible to reproduce the transaction within the device.

※ The Message is written by the sender, not the requester.

Convenient Specification, EIP-681

- Ethereum already has Readable URIs.

'ethereum:$contractAddress@[chainId]/transfer?address=$userAddress&uint256=$amountWei';

- We can even make apps like this.

Specialize for Symbol

- For Symbol, since it has the feature of
  - being able to send multiple mosaics in a single transaction

and

  - send multiple transactions at once
- So this must be corrected.

symbol:$Address@$network/transfer?
id[0]=$Mold[0]&id[1]=$Mold[1]...
&amount[0]=$amount[0]&amount[1]=$amount[1]...
&div[0]=$divisibility[0]&div[1]=$divisibility[1]...

- This is treated as a requirement per transaction, requiring the loading and execution of multiple transactions.

The purpose of this subsystem

- The process of creating invoices and making payments via invoices has been divided into three phases:
  - reading
  - confirmation and message entry
  - submission.

Making an invoice

- Create an invoice like this. Due to the format constraints.

- There was no space to insert other mosaics, so this time we tested only with XYM.

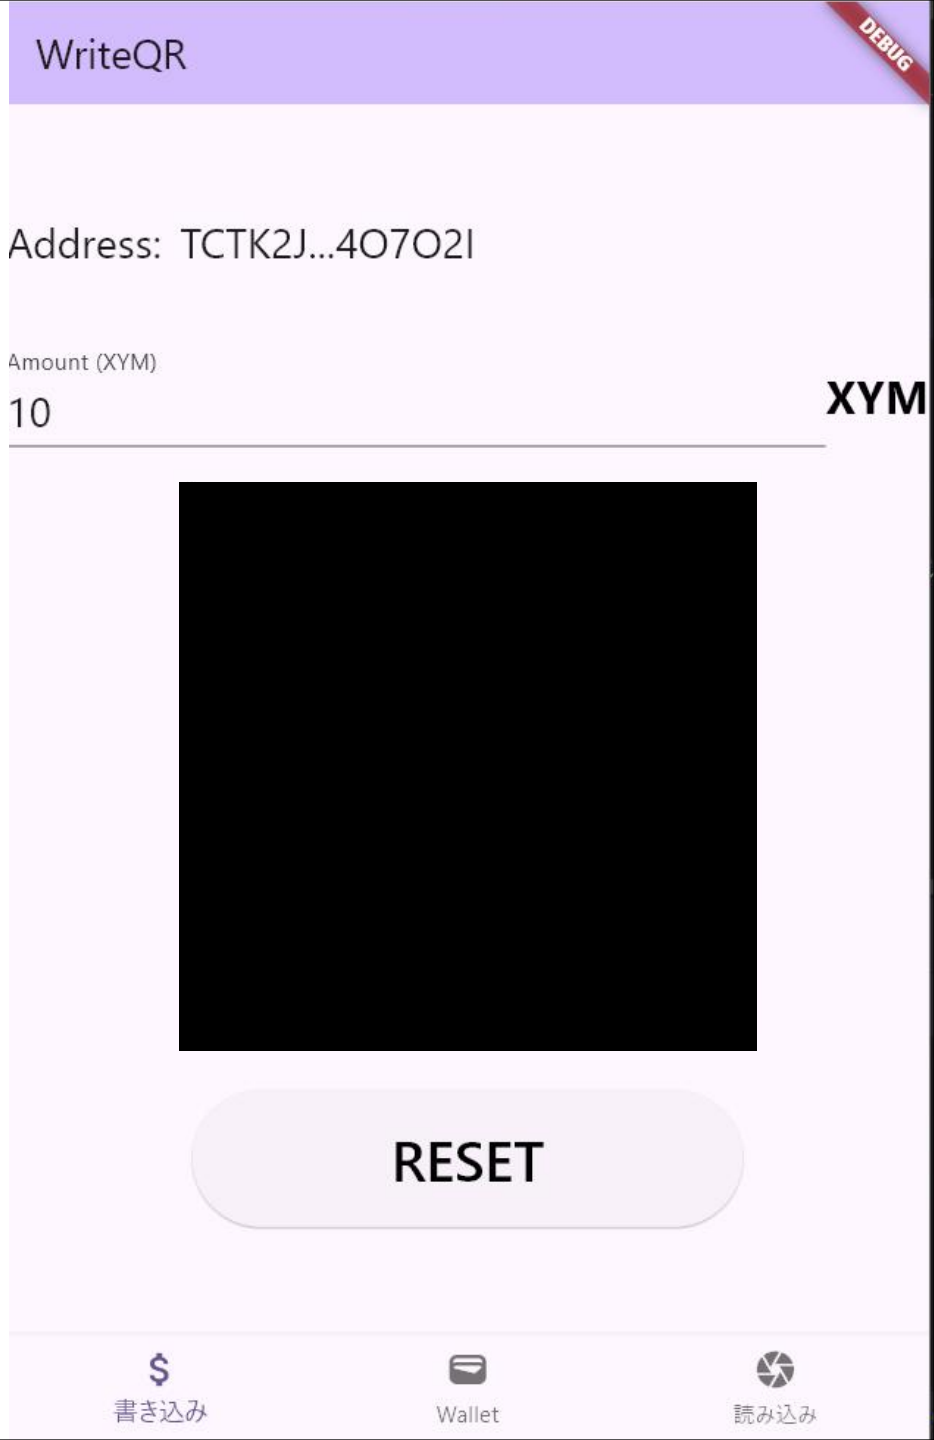

Reading invoices

- After batch scanning the invoices, this confirmation screen will appear, at which point you can add a message.