HOMEWORK

Library View Model

1 Create two new classes

- LibraryContent
- LibraryViewModel

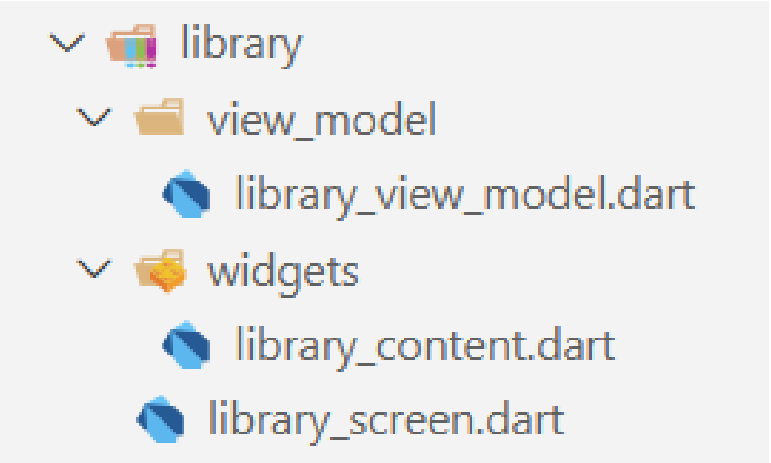

2 Move UI code

- Move the old LibraryScreen UI into LibraryContent.

3 Update LibraryScreen

- Inject LibraryViewModel (with required repositories and notifiers).
- Return LibraryContent as child.

4 Implement LibraryViewModel

- Create init() to fetch songs from the repository.
- Listen to PlayerState and call notifyListeners() on change.
- Expose all UI data through getters.
- Expose user actions (play, stop, etc.).

5 Update LibraryContent

- Read only LibraryViewModel and AppSettingsState.
- Delegate all presentation logic to LibraryViewModel.
- Keep the widget purely declarative.

HOMEWORK

Home View Model

Recent songs → list of songs the user played recently

Recommended songs → list of songs the user might like, based on history

Home

Your recent songs

Song 1 playing STOP

Song 2

Song 3

You might also like

Song 3

Song 4

Song 5

⚠️ For now, only 1 user in this app, no need current user, login...

HOMEWORK

Home View Model

```
/model
    Song

/repositories
    song_repository
    user_history_repository        // Get and add a list of song ID...
/ui/states
    player_state                   // Handler the current played song

/ui/screens
    home_screen
        home_view_model            // responsible for orchestrating everything
        home_content
```

The **ViewModel** is responsible for orchestrating:

- Injected repositories:
  - SongRepository → fetch song objects
  - UserHistoryRepository → fetch recent song IDs

- Injected global state:
  - Player State → check the current played song
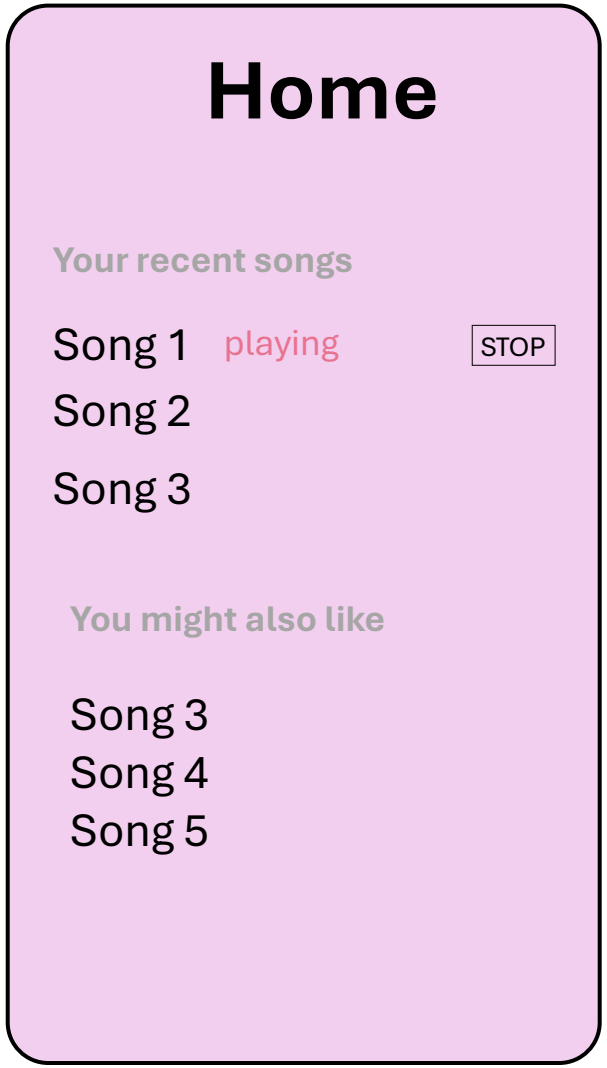
- Convert IDs → full Song objects
- Apply any additional formatting / filtering