

中山大学数据科学与计算机学院本科生实验报告

(2017学年秋季学期)

课程名称：数据库系统 任课教师：刘玉葆

年级，班级	15M1	专业（方向）	软件工程(移动信息工程)
学号	15352008	姓名	蔡荣裕
电话	13727021990	Email	897389207@qq.com

一. 实验目的

1. 熟悉SQL的数据更新操作。
2. 能够使用SQL语句对数据库进行数据插入、更新、删除操作。

二. 实验内容

在本次实验中,主要的内容是如何使用SQL语句对数据进行更新。

- 使用 INSERT INTO语句插入数据,包括插入一个元组或将子查询的结果插入到数据库中两种方式。
- 使用 SELECT INTO语句,产生一个新表并插入数据。
- 使用 UPDATE语句可以修改指定表中满足 WHERE子句条件的元组,有三种修改的方式:修改某一个元组的值,修改多个元组的值,带子查询的修改语句。
- 使用 DELETE语句删除数据:删除某一个元组的值,删除多个元组的值,带子查询的删除语句。

三. 实验结果

1. 向 STUDENTS表插入编号是“800022222”且姓名是“WangLan”的元组。


```
INSERT  
INTO STUDENTS  
VALUES ('800022222', 'WangLan', NULL, NULL)
```

结果如下：



查询添加后信息

```
SELECT * FROM STUDENTS WHERE sid='800022222'
```

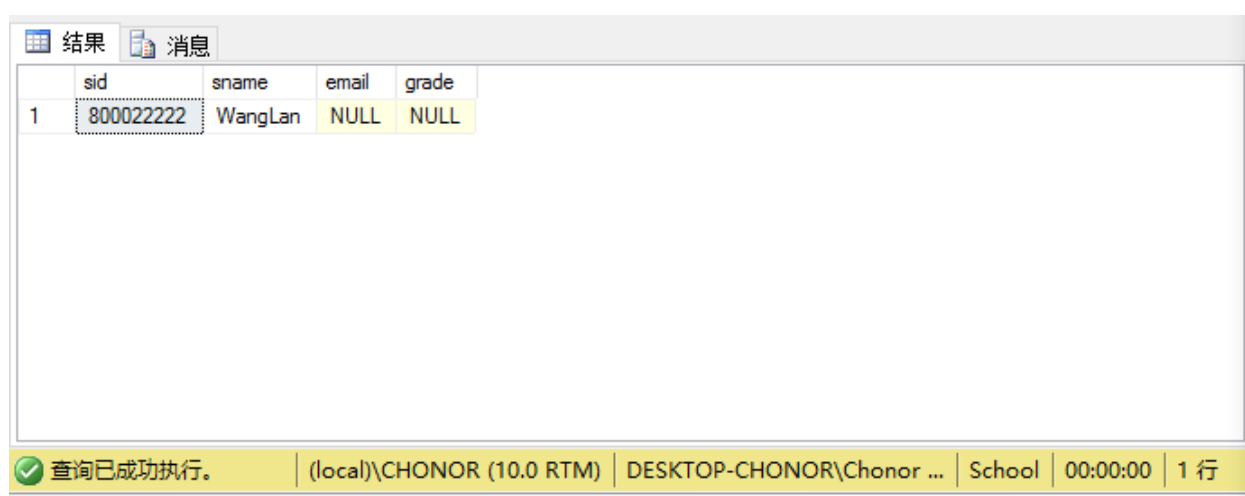

2. 向 TEACHERS 表插入元组(“200001000”,“LXL”,“s4zrck@pew.net”,“3024”)。

```
INSERT INTO TEACHERS VALUES ('200001000', 'LXL', 's4zrck@pew.net', '3024')
```

结果如下：



结果		消息		
tid	tname	email	salary	
1	200010493	xzgfllko	zcf_m@def.com	4000

查询已成功执行。 | (local)\CHONOR (10.0 RTM) | DESKTOP-CHONOR\Chonor ... | School | 00:00:00 | 1 行

4. 将 TEACHERS 表中所有工资小于2500的老师工资改为2500。

```
UPDATE TEACHERS
SET salary=2500
WHERE salary<2500
```

结果如下：

消息	
(5814 行受影响)	

查询已成功执行。 | (local)\CHONOR (10.0 RTM) | DESKTOP-CHONOR\Chonor ... | School | 00:00:00 | 0 行

查询修改后信息

```
SELECT *
FROM TEACHERS
WHERE salary<=ALL(
    SELECT salary
    FROM TEACHERS
    WHERE salary IS NOT NULL
)
```




结果



消息

tid	cid
-----	-----



查询已成功执行。

(local)\CHONOR (10.0 RTM)

DESKTOP-CHONOR\Chonor ...

School2

00:00:00

0 行

6. 更新编号“800071780”的学生年级为“2001”。

```
UPDATE STUDENTS
SET grade='2001'
WHERE sid='800071780'
```

结果如下：

查询修改后学生信息

```
SELECT *
FROM STUDENTS
WHERE sid='800071780'
```

结果		消息		
	sid	sname	email	grade
1	800071780	iscmwink	htoactp@aof.gov	2001

查询已成功执行。 | (local)\CHONOR (10.0 RTM) | DESKTOP-CHONOR\Chonor ... | School | 00:00:00 | 1 行

7. 删除没有学生选修的课程。

先查询一下有多少课程没人选修用于验证答案

```
SELECT COURSES.cname as '课程名称'
FROM COURSES
WHERE COURSES.cid NOT IN(
SELECT DISTINCT cid
FROM CHOICES
)
```

结果		消息		
	课程名称			

查询已成功执行。 | (local)\CHONOR (10.0 RTM) | DESKTOP-CHONOR\Chonor ... | School | 00:00:00 | 0 行

```
DELETE
FROM COURSES
WHERE COURSES.cid NOT IN(
SELECT DISTINCT cid
FROM CHOICES
)
```

结果如下：



8. 删除年级高于1998的学生信息。

```
DELETE
FROM CHOICES
WHERE sid IN(
    SELECT sid
    FROM STUDENTS
    WHERE grade<'1998'
)
DELETE
FROM STUDENTS
WHERE grade<'1998'
```

结果如下：



查询一下删除结果

```
SELECT sid
FROM STUDENTS

WHERE grade<'1998'
```




10. 删除成绩不及格的选课记录。

```
DELETE
FROM CHOICES
WHERE score<60
```

结果如下：



验证一下结果

```
SELECT *
FROM CHOICES
WHERE score<=ALL(
    SELECT score
    FROM CHOICES
)
```

The screenshot shows the SQL Server Enterprise Manager interface. At the top, there are two tabs: "结果" (Results) and "消息" (Messages). The "结果" tab is active, displaying a table with five columns: "no", "sid", "tid", "cid", and "score". The table is currently empty. Below the table, a status bar indicates "查询已成功执行。" (Query executed successfully.) followed by details about the connection: "(local)\CHONOR (10.0 RTM)", "DESKTOP-CHONOR\Chonor ...", "School", "00:00:00", and "0 行" (0 rows).

四. 实验感想

这次实验主要是增加、修改和删除。增加和修改都比较简单，增加只需要INSERT一下然后key对应就行了，插入其实就是就是查找然后SET。删除比较麻烦，因为一旦代码写错那么很有可能会出现误删的情况，同时因为会出现外键报错的情况，所以删除的时候可能需要先删除一张表的一部分才能删除我们想要的表，主要还是要理解一下外键约束的问题，理解之后就能正确的删除我们想要的部分了，删除之前最好选用SELECT看看我们要删除多少东西对比一下比较好。