

МІНІСТЕРСТВО ОСВІТИ І НАУКИ УКРАЇНИ
НАЦІОНАЛЬНИЙ ТЕХНІЧНИЙ УНІВЕРСИТЕТ
«ДНІПРОВСЬКА ПОЛІТЕХНІКА»



Факультет інформаційних технологій
Кафедра системного аналізу та управління

Звіт

з практичної роботи №4 з дисципліни
«Аналіз програмного забезпечення»

Виконала:
студент групи 121-22-2
Чорний М.Ю.
Перевірили:
доц. Мінеєв О.С.
ас. Шевченко Ю.О.


**Дніпро
2025**

Тема: AWS S3.

Мета: Набування навичок у створення і розміщенні статичної веб-сторінки на AWSS3.

Виконання завдання.

Крок 1. Зареєструватися в системі AWS.

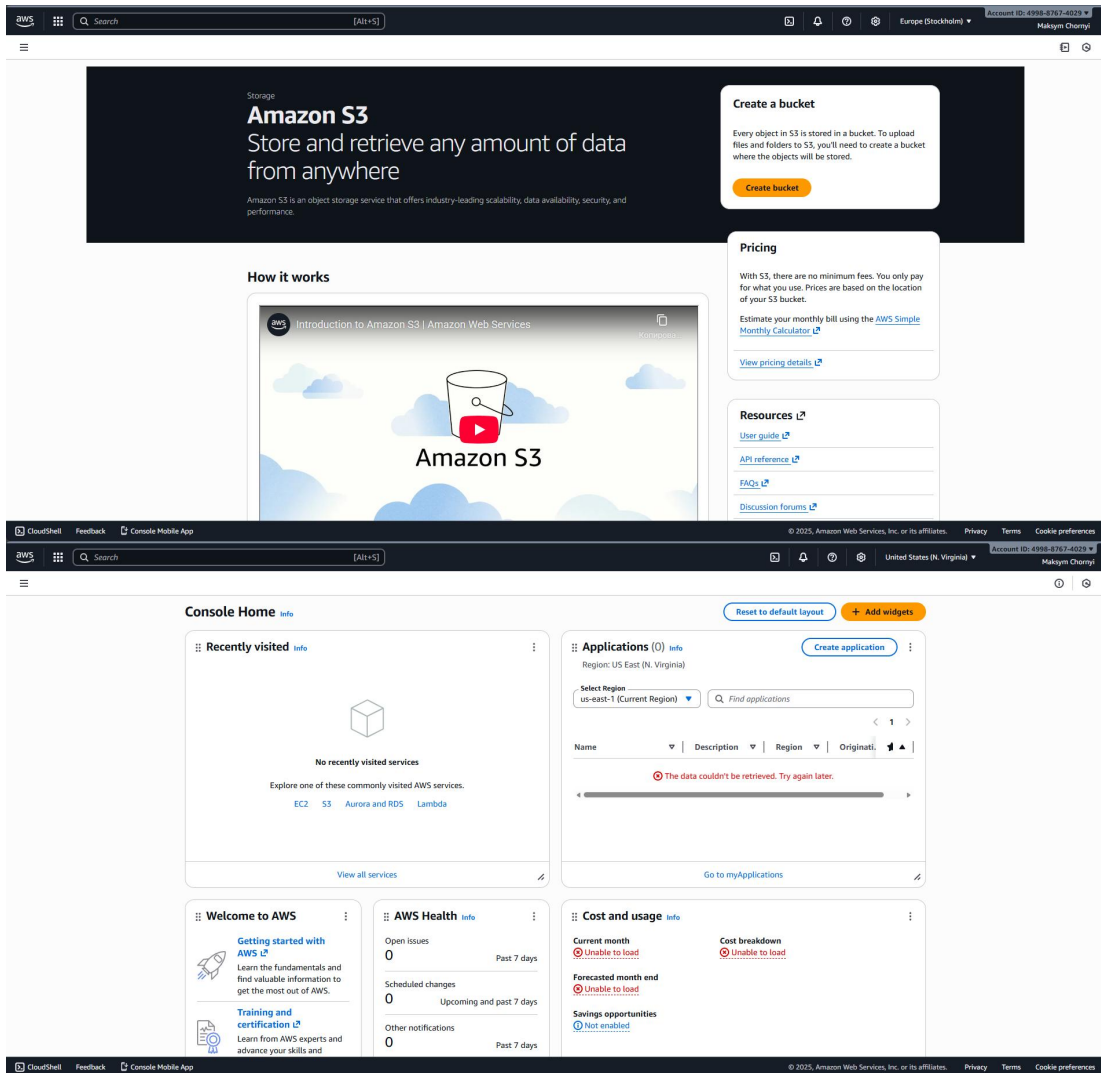

Крок 2. Створити бакет у S3 з вашим прізвищем та іменем.

Amazon S3

Search

[All-5]

Amazon S3

Buckets

Create bucket

General configuration

AWS region

Europe (Stockholm) eu-north-1

Bucket type

Info

General purpose

Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes for infrequently stored objects across multiple availability zones.

Directory

Recommended for low latency use cases. These buckets can only use the S3 Express One Zone storage class, which provides faster processing of data within a single availability zone.

Bucket name

Info

chorny-makym-apz

Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

Choose bucket

Format: <ID>/nameoptional

Object Ownership

Info

Controls ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

ACLs disabled (recommended)

All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

ACLs enabled

Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership

Bucket owner enforced

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all, in order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. After successfully turning on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

Block all public access

Turning this setting on for a bucket or turning on all four settings below, each of the following settings are independent of one another.

☒ Block public access to buckets and objects granted through new access control lists (ACLs)

S3 will block public access permissions granted to newly created buckets, policies, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ Block public access to buckets and objects granted through any access control lists (ACLs)

S3 will ignore all existing public access permissions and objects.

☐ Block public access to buckets and objects granted through new public bucket or access point policies

S3 will deny the access and actions for all public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Turning off block of public access might result in this bucket and the objects within becoming public.

We recommend that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning

Enables versioning of objects in the bucket. When versioning is enabled, you can store multiple versions of an object in a bucket. For example, you can store previous versions of deleted objects and restore them. You can also restore deleted objects up to the retention period of the deleted object.

Versioning

Info

Bucket versioning is not supported for this bucket.

Successfully created bucket "chorny-makym-apz"

To upload files and folders, or to configure additional bucket settings, choose [View details](#).

General purpose buckets

All AWS Regions

Directory buckets

General purpose buckets (1) Info

Buckets are containers for data stored in S3.

Find buckets by name

chorny-makym-apz

Name

AWS Region

Creation date

chorny-makym-apz

Europe (Stockholm) eu-north-1

November 18, 2025, 01:14:32 (UTC+01:00)

Account snapshot Info

Updated daily

Storage Lens provides visibility into storage usage and activity trends.

[View dashboard](#)

External access summary - new Info

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

CloudShell

Feedback

Console Mobile App

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

Крок 3. Розмістити на S3 статичну веб-сторінку, яка містить ваше ПІБ та Вашу академічну групу.

The screenshot shows a web browser window at the top displaying the content of an `index.html` file. The HTML code is as follows:

```
<!DOCTYPE html>
<html lang="uk">
<head>
<meta charset="UTF-8">
<title>Моя сторінка</title>
</head>
<body>
<h1>Чорний Максим Юрійович</h1><br />
<p>121-22-2</p>
<p>&#128579;</p>
</body>
</html>
```

Below the browser window is the AWS S3 console 'Upload' page. The page shows the file `index.html` (254.0 B) being uploaded to the bucket `s3://chorny-maksym-app`. The interface includes sections for 'Files and folders', 'Destination', 'Permissions', and 'Properties'. At the bottom right, there are 'Cancel' and 'Upload' buttons.

Крок 4. Налаштування хостингу і отримання публічної адреси сторінки:

<http://chorny-maksym-apz.s3-website.eu-north-1.amazonaws.com/>

The screenshot displays the AWS Management Console interface for configuring static website hosting on an Amazon S3 bucket. The console is divided into three main sections: a left-hand navigation pane, a central content area, and a right-hand summary pane.


Left-hand navigation pane: Shows the hierarchy of services and features. Under "Amazon S3", options include "General purpose buckets", "Directory buckets", "Table buckets", "Vector buckets", "Access Grants", "Access Points (General Purpose Buckets, FSx file systems)", "Access Points (Directory Buckets)", "Object Lambda Access Points", "Multi-Region Access Points", "Batch Operations", and "IAM Access Analyzer for S3". Under "Storage Lens", options include "Dashboards", "Storage Lens groups", and "AWS Organizations settings". A "Feature spotlight" is also visible.

Central content area: The main workspace for configuration. It shows the "Edit static website hosting" page for the bucket "chorny-maksym-apz". The page includes a "Static website hosting" section with a "Host a static website" option selected. Below this, there are fields for "Index document" (set to "index.html") and "Error document - optional" (set to "error.html"). A "Redirection rules - optional" section is also present. A blue banner at the top of the content area states: "For your customers to access content at the website endpoint, you must make all your content publicly readable. To do so, you can edit the S3 Block Public Access settings for the bucket. For more information, see Using Amazon S3 Block Public Access."

Right-hand summary pane: Provides a quick overview of the bucket's settings. It includes a green status bar indicating "Successfully edited static website hosting". Below this, it shows "Object Lock" (Disabled), "Requester pays" (Disabled), and "Static website hosting" (Enabled). A blue banner at the bottom of the summary pane recommends using "AWS Amplify Hosting for static website hosting" and provides a "Create Amplify app" button. The "Bucket website endpoint" is listed as "http://chorny-maksym-apz.s3-website.eu-north-1.amazonaws.com/".

Modal dialog: A "Confirm" dialog box is overlaid on the console, titled "Edit Block public access (bucket settings)". It contains a warning icon and text: "Updating the Block Public Access settings for this bucket will affect this bucket and all objects within. This may result in some objects becoming public." Below the text is a text input field containing the word "confirm". The dialog has "Cancel" and "Confirm" buttons.

<http://chorny-maksym-apz.s3-website.eu-north-1.amazonaws.com/>

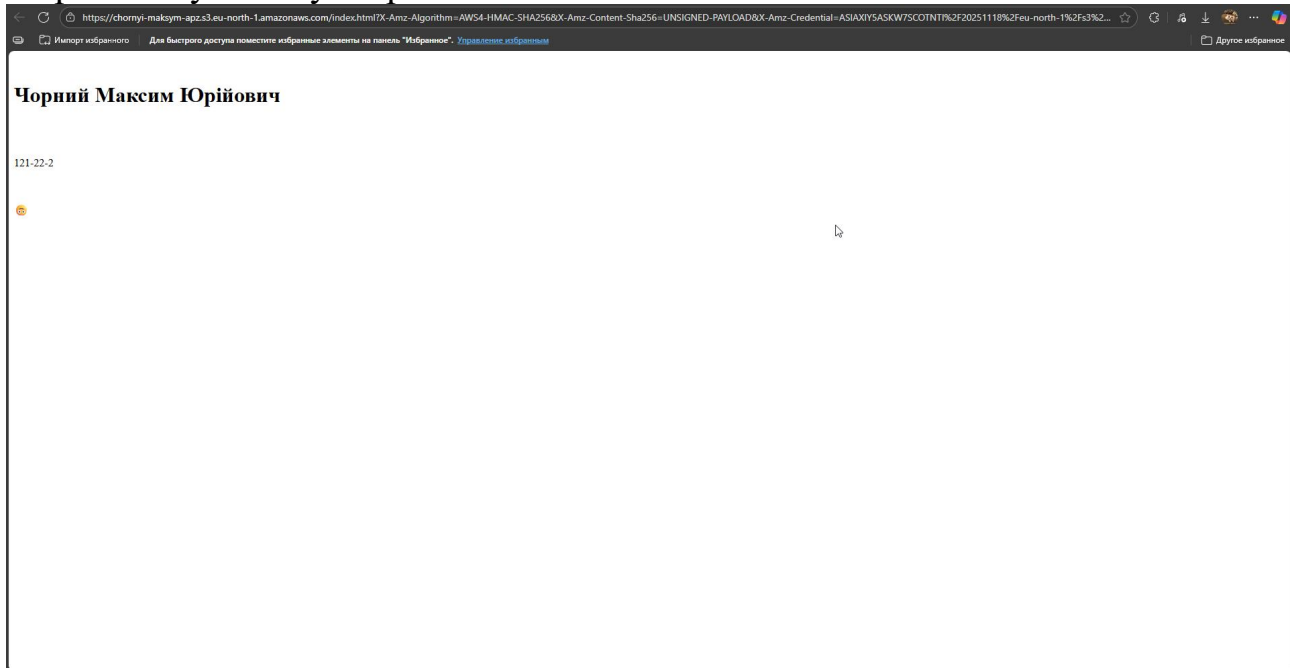

Висновки

В ході роботи було ознайомлено з сервісом хмарного сховища AWS S3.

Виконано створення бакета та завантаження статичного HTML-файлу.

Опановано методи доступу до об'єктів у хмарі: незважаючи на суворі політики безпеки AWS (які за замовчуванням блокують публічний доступ), було забезпечено успішне відображення веб-сторінки у браузері, що підтверджує коректність роботи створеного ресурсу.