Low-Frequency RoPE Subspace for Near–Far Sparse Attention

Anonymous authors

***Abstract*—Sparse attention must retain useful candidates at low selection cost. We study a near–far page-to-token cascade with shared 32-coordinate low-frequency RoPE scoring, original-dimensional attention on selected tokens, and absolute budgets: protected sink and window lengths, a near extent, explicit near page and token quotas, far capacity by subtraction. Ratio-coupled parameterizations instead silently reallocate far capacity: one expression links the far token budget to three separate knobs, and archived diagnostics exhibit all three resulting failures, including an exact integer threshold. Absolute quotas make both regions' capacities explicit and non-negative by construction. Author-reported 11-task RULER 32K AVGs are 58.30 and 59.29 under near quotas (16,640) and (8,320) on Qwen3-8B; a Qwen3-32B comparison reports 50.64 sparse versus 52.22 dense. These descriptive comparisons neither isolate mechanisms nor establish non-inferiority, and separate historical timings show slower sparse decoding. Establishing benefit for the compact 4/128-protection design still requires matched quality and preparation-inclusive complete-request cost.**

***Index Terms*—sparse attention, shared representation, regional retrieval, long-context inference**

I. Introduction

In dense long-context decoding, each new token attends to a growing history of cached keys and values. Sparse attention restricts final attention to selected tokens, but selecting them requires scoring, ranking and memory accesses. The design goal is to preserve task-relevant tokens within a fixed budget while keeping selection cheaper than the attention work it removes. Both candidate selection and final attention-set size are therefore central design problems.

Cascades such as AsyncTLS shortlist pages using inexpensive summaries before token refinement [4]. Mean pooling and sign-aware extrema, summaries our selector also uses, do not rank pages by their total attention weight. Following ClusterKV's token/page perspective [8], Figure 1(a) shows a single Qwen3 query where fewer missed mass-ranked reference pages coincide with more missed reference-page mass. Unequal regional allocations and realized token counts preclude a controlled comparison, but motivate examining how scoring and budgets jointly shape candidate access.

Across 128 correlated observations from four sequences, the two global selectors have different regional missed-mass profiles (Fig. 1(b)). Mean missed mass, normalized by each query's total mass-ranked reference mass, is .084 near and .170 far for block averaging, versus .079 and .042 for sign-aware extrema. Extrema have lower mean misses in both regions; these diagnostics do not establish regional specialization or near-region equivalence. With a fixed 2048-token cap, the best of 23 tested near-avg/far-extrema splits has mean missed mass .135, versus .121 for global extrema. This bounded diagnostic scan establishes neither a hybrid advantage nor a task-quality benefit.

We study a two-level selector that couples a shared scoring view with absolute regional budgets. Both stages use a fixed set of 32 coordinates comprising 16 complete low-frequency RoPE pairs; near pages and near tokens receive explicit integer quotas, and far capacity follows by subtraction from the total cap. Among the three 32-coordinate subsets in Figure 1(c), low-frequency pairs retain .84 of full-dimensional reference mid-TopK mass on average, random coordinates .51, high-frequency pairs .24; the random subset does not preserve RoPE pairs. Selected tokens use original-dimensional Q/K/V in one final attention operation. Compact coordinates narrow scoring dot products, but ordinary token scoring still spans full history before masking; fewer shortlisted pages alone do not remove that work. We also formulate a prefill-informed far gate motivated by the layer variation in Figure 1(d); it is disabled by default and requires separate evaluation.

We contribute an absolute-budget two-level selector with shared low-frequency coordinates, a unified analysis of implicit budget coupling in ratio parameterizations, and separate evaluations of task quality, regional coverage and execution cost. Under the archived ratio interface, one expression in the page cap, near share and fill fraction determines the far token budget, so raising any of the three can zero it. On complete 11-task RULER32K sets, reported Qwen3-8B AVG is 0.99 points higher at near quotas (8,320) than at (16,640), with quotas changing together. A separate 11-task RULER32K comparison on Qwen3-32B shows a 1.58-point sparse deficit relative to dense attention. These descriptive comparisons do not isolate either mechanism, and the archived sparse configuration decodes more slowly than dense attention at every measured length. Establishing a quality–latency benefit for the compact 4/128-protection design requires matched task quality and complete-request measurements, including preparation, maintenance and selection.

II. Related Work

Quest supplies sign-aware page-extremum bounds for far-page scoring, SparQ approximates attention from query-selected key coordinates, and HISA prunes the attention set hierarchically [1], [2], [3]; SparQ protects a recent-token window, and HISA forces first and last blocks into its coarse candidate set. AsyncTLS already combines a page-to-token cascade with coordinate selection, quantization, per-query normalization followed by grouped-query-attention (GQA) probability aggregation, and final attention over original KV [4]. Rather than proposing a new cascade, we study these existing components with complete low-frequency RoPE pairs shared across both stages and absolute near–far budgets, distinguishing page-level eligibility from final token capacity.

The selector's own reads also matter. Token-Picker uses conservative probability estimates from partial key-bit chunks to stop further key-chunk and value transfers for pruned tokens [13]; our selector instead ranks candidates with a fixed coordinate subset under page and token budgets, keeping original-dimensional KV. Our bf16 configuration stores floating-point scoring keys; AsyncTLS uses packed INT4 token-level indices and FFD scans 2-bit key thumbnails [4], [5]. Compact coordinates and regional quotas control scoring width and candidate access. KV compression and placement methods address complementary storage and movement constraints [6], [7], [8]; a smaller scoring view retains original-KV capacity and alone establishes no complete-request latency benefit.

III. Near–Far Selection in a Shared Subspace

To control selection cost and candidate access, the cascade shares a scoring view and uses absolute regional budgets. One 32-coordinate map serves L1 page screening and L2 token refinement, separating low-dimensional selection from original-dimensional attention

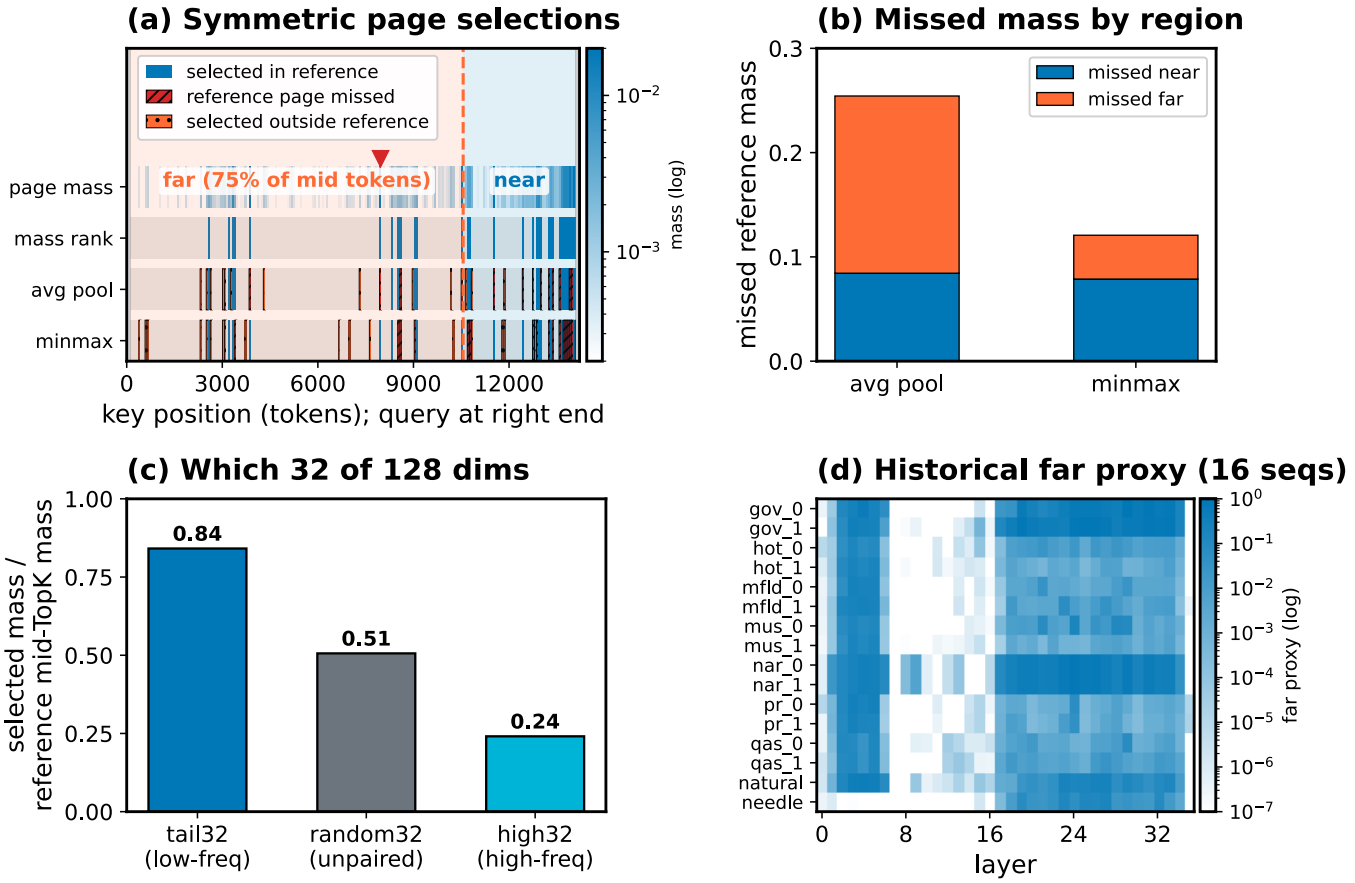


Fig. 1. Four motivating diagnostics; Qwen3-8B, 128/128 prefix/recent protection in (a)–(c). (a) MuSiQue sample 1, layer 24, query 14212. The top strip shows summed attention per page, not a selection. Below: stored mass-rank, avg and minmax selections, 32 pages each, using 1989/1989/2048 tokens under a 2048 cap. Avg/minmax miss 13/17 reference pages holding 59.65%/26.46% of reference-page mass. Blue: selected reference pages; red hatching: missed reference; orange dots: selected outside the reference. Mass-rank is a whole-page comparison reference, not an optimal oracle, exact token TopK or DSA. Avg and minmax share 32 coordinates and head aggregation; the reference uses full-dimensional attention weights. Different regional allocations and realized counts preclude inferring near/far specialization or task quality from these misses. (b) Mean regional shares of missed reference mass: for each query, missed reference mass in each region is divided by total mass-ranked reference mass, then averaged across 128 correlated observations from four sequences. Extrema miss less in both regions; this does not establish regional specialization. (c) Selected mass relative to full-dimensional reference mid-TopK mass; random32 does not preserve RoPE pairs. (d) One 16-by-36 historical single-query proxy matrix gives 24/36 layer medians below .01 and 12–32 low-proxy layers per sequence. It uses the last sampled query, group-logit summation before softmax and far interval $[64, t-2048)$ (S6), unlike the current gate. These are diagnostic selections and profiles, not task-quality or decode-safety results.

(Fig. 2). Selection runs only during decoding; prefill remains dense. L1 assigns independent near/far page quotas. With gating and candidate gathering disabled, reference L2 scores the full history before page masking and regional token selection. Selected and protected indices merge for original-QKV attention; recomputed retained logits cannot recover omitted tokens. Archived evaluations do not validate the newer candidate-scoring path.

A. Shared low-frequency coordinates

Both regions and both selection stages use the same coordinate map within each layer and KV head, while each query head is scored separately. For Qwen3-8B, we select post-RoPE coordinates $J = \{48, \dots, 63, 112, \dots, 127\}$ from each 128-dimensional query and key. The indices retain 16 complete low-frequency split-half RoPE pairs (Supplementary Fig. S1). With coordinate-selection matrix $E_J \in \mathbb{R}^{128\times 32}$, the scoring vectors are $z_q = E_J^\top q$ and $z_i = E_J^\top k_i$. The retained pairs' slow positional rotation motivates this selection, although it does not guarantee preservation of important tokens. The compact implementation uses width-32 scoring tensors, whereas the historical quality runs used 32 active coordinates in width-128 L2 tensors (S7).

L1 aggregates selected key coordinates into page summaries for coarse ranking; L2 refines candidates with per-token scores in the same coordinate view. The two scoring views occupy separate buffers. Original KV remain full width. Compact scoring narrows each dot product fourfold, but view preparation and maintenance add work without compressing the original KV cache (S7).

B. Absolute budgets and regional eligibility

In decoding, t indexes the current token from zero across the full sequence including prefill. Let s and w denote the protected sink and recent-window lengths, with protected set $\mathcal{P}_t = \{i : 0 \le i \le t,\ i < s \text{ or } i > t - w\}$ and unprotected middle $\mathcal{M}_t = \{0, \dots, t\} \setminus \mathcal{P}_t$; overlapping protection counts once. Near is a suffix of $\mathcal{M}_t$ with explicit page-aligned extent L_n; far is the rest. Near excludes the protected recent window.

Regional page caps and token quotas constrain the cascade (Supplementary Fig. S2). Near pages use query–mean-key dot products to summarize page-level relevance; far pages use sign-aware extrema to

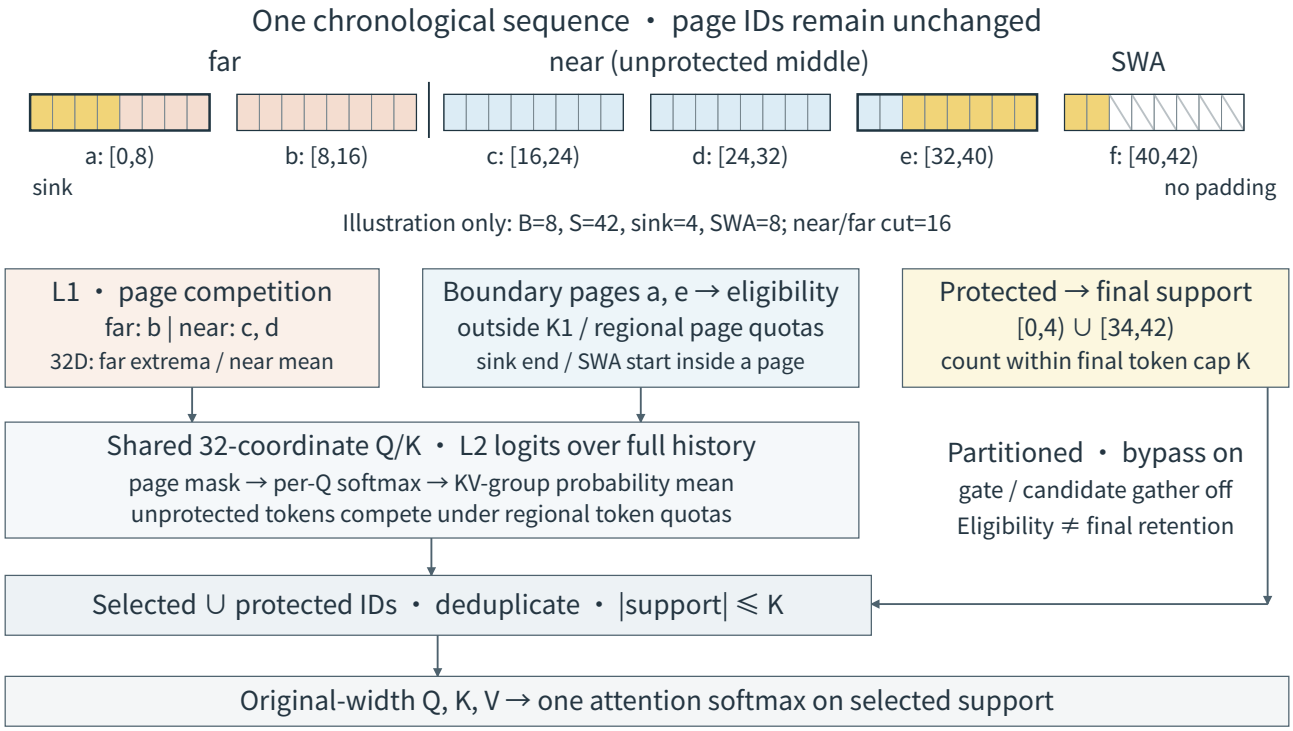


Fig. 2. Shared-subspace partitioned reference architecture: boundary bypass enabled, gating and candidate gathering disabled. A shared coordinate view feeds regional L1 page scoring and ordinary full-history L2 scoring. One chronological page sequence is partitioned into far and near. Nonaligned protection-boundary pages join the page mask outside L1 quotas; only protected tokens bypass final selection. Page masks limit eligibility; per-query softmax and KV-group probability averaging precede regional token selection. Protected positions join deduplicated IDs within K. Near excludes the protected recent window. IDs define support over original-width K/V; physical gathering is backend-dependent. Arrays are schematic.

bound shared-space token scores, a heuristic assignment. Summaries cover full physical pages, including protected positions (S7). In the partitioned path, a page containing a non-page-aligned sink end or recent-window start bypasses L1 ranking: it is removed from the competition pools and appended without consuming their page quotas. Its unprotected tokens still compete in L2; only protected tokens are forced into final support. The near/far cut is page-aligned and adds no bypass. For a nonempty page b, let $m_{b,j} = \min_{i\in b} z_{i,j}$ and $M_{b,j} = \max_{i\in b} z_{i,j}$. Quest's construction [1] gives

$$U_b(z_q) = \sum_j (z_{q,j}^+ M_{b,j} + z_{q,j}^- m_{b,j}), \tag{1}$$

where $z^+ = \max(z, 0)$ and $z^- = \min(z, 0)$. Each signed coordinate contribution is bounded by its chosen extremum, so $z_q^\top z_i \le U_b(z_q)$ for every shared-space key in b. This does not bound original-dimensional logits. Extrema may come from different tokens, making the bound loose enough to misrank pages and miss important tokens. Average-key scores lack this per-token bound.

For total cap $K \ge |\mathcal{P}_t|$, define the middle-token budget $K_{\text{mid}} = K - |\mathcal{P}_t|$. The interface exposes absolute quantities: near page quota n_p, near token quota n_k with $0 \le n_k \le K_{\text{mid}}$, and far capacity by subtraction, $K_1 - n_p$ far pages and $K_{\text{mid}} - n_k$ far tokens. Each quota is explicit; neither region's capacity can change without changing its own parameter. With enough positive-probability candidates, L2 cannot recover unprotected tokens from L1-rejected pages. S7 details scarce-support and masked zero-tie exceptions.

Ratio-coupled interfaces hide this subtraction. The archived parameterization derives $n_p = \max(1, \text{round}(\beta K_1))$ and $n_k = \min(\lfloor \gamma n_p B \rfloor, K_{\text{mid}})$ with ties-to-even rounding, so the far token budget reduces to

$$k_f = \max(0,\ K_{\text{mid}} - \min(\gamma n_p B,\ K_{\text{mid}})). \tag{2}$$

Three knobs, K_1, β and γ, therefore reallocate far capacity through one expression, while far pages remain admitted at $k_f = 0$: page eligibility and token capacity are separate constraints. Archived diagnostics exhibit all three reallocations, including an exact integer threshold at which raising K_1 zeroes far tokens (Q2, S6). Explicit quotas are immune by construction: n_k is bounded by K_{mid} and far capacity is stated, not derived.

With disjoint protection and sufficient candidates, the compact configuration ($K = 1024$, $s = 4$, $w = 128$) leaves 892 middle slots per KV head. Near quotas $(n_p, n_k) = (8, 320)$ leave 572 far slots, the $(16, 640)$ alternative 252 (Supplementary Fig. S2). The partial prefix page can reselect up to four protected tokens, so far coverage is nominal.

C. GQA selection and original-dimensional attention

GQA assigns four of Qwen3's 32 query heads to each of its eight KV heads. L1 averages their page scores before regional TopK. Ordinary L2 computes each query's full-history logits, applies the shared page mask, then softmax. Group-averaged probabilities determine regional token TopK. L2 uses scale $1/\sqrt{128}$ before softmax even with 32 scoring coordinates. Because softmax precedes group averaging, this rule generally differs from applying softmax to group-averaged logits. A smaller L1 shortlist restricts eligibility without reducing ordinary L2's full-history dot products.

TABLE I
Compact design parameters and execution policy. These settings define the proposed implementation, not the historical runs. K includes unique protected tokens.

Parameter	Setting
Final token cap K	1024
Page size; L1 competition cap K_1	64; 128
Near page quota n_p (far)	8 (120)
Near token quota n_k (far)	320 (572)
Near extent L_n	quarter of middle, page-aligned
L1/L2 active coordinates	32/32
Prefix / recent protection	4/128
Prefill; decode layers	dense; all sparse

For KV group h, let $\mathcal{S}_{t,h}$ be the deduplicated union of protected positions and regional winners, with $|\mathcal{S}_{t,h}| \le K$. Each query g uses this support for its own full-dimensional attention ($d = 128$):

$$o_{h,g} = \sum_{i \in \mathcal{S}_{t,h}} \frac{e^{q_{h,g}^\top k_{i,h}/\sqrt{d}}}{\sum_{j \in \mathcal{S}_{t,h}} e^{q_{h,g}^\top k_{j,h}/\sqrt{d}}} v_{i,h}. \tag{3}$$

Each query applies one softmax over the merged indices, avoiding the addition of separately normalized regional outputs [9]. Full-dimensional retained logits still use a restricted denominator, which can change the output. These indices define a shared logical support. Physical KV gathering and reuse depend on backend and length; short sequences can use a dense masked path.

D. Prefill-informed far gating

The default-off gate averages far mass across final prefill queries and heads after full-dimensional per-head causal softmax over keys. Below ϵ, it records a skip, frozen at first sparse decode. For supported fixed quotas, triggering removes far competition and refills near L2 within unchanged near pages, while retaining sink/window tokens (Supplementary Fig. S3; S5). Boundary-page bypass may still admit a sink-edge page to candidate scoring; a blanket claim of eliminating all far dot products is therefore unwarranted. Ordinary L2 and dense attention fallback score full history before masking; gather attention scores gathered keys. Calibration and skipped regions can differ (token versus page alignment); ϵ does not bound decoding error. Skipping far can change normalization and group-averaged near rankings. Preparation, sequence-wide buffers and normalization remain; quality and complete-request cost require evaluation (S5).

IV. Experimental Setting

We evaluate three aspects separately: task quality (Q1), regional candidate coverage (Q2) and execution cost (Q3). Table I defines the compact Qwen3-8B design: dense prefill, sparse decoding and a 1024-token cap including four prefix and 128 recent tokens (the 4/128-protection design). Archived runs use ratios (α, β, γ) mapping to the same geometry via $n_p = \max(1, \text{round}(\beta K_1))$, $n_k = \min(\lfloor \gamma n_p B \rfloor, K_{\text{mid}})$ and page-aligned $L_n = \lfloor \alpha |\mathcal{M}_t| \rfloor$; $(8, 320)$ equals the archived $(.25, .0625, .625)$ cell (S7). Archived quality runs applied 16-level quantize–dequantize to L2 token keys; we treat it as an implementation detail outside the mainline (S7). The historical five-task LongBench shared-subspace arm uses an earlier implementation: 128/128 protection and 32 active coordinates in zero-filled width-128 L2 keys. The labels "full-dimensional page/token scoring" denote reported variants without complete execution configurations; we treat them as nominal labels, not controlled single-stage ablations. Synthetic selector and model-level decode timings come from separate studies without matched quality or cost (S6/S7).

Workloads and comparisons. Reported quality covers five-task LongBench [10] and 11-task RULER [11] (Qwen3-8B: 32K/64K, historical 128K; Qwen3-32B: 32K), plus ported Quest/AsyncTLS/JSSA baselines and a Llama-3.1-8B arm at 32K. Three nominal sparse LongBench variants lack verified factorial isolation. FullKV is dense and uncapped (RULER/decode timing). Method comparisons must retain and disclose each baseline's native prefill/decode path; policy-matched adaptations need separate reporting. Budget matching aligns final unique-token caps K including protection; realized counts and head sharing affect KV traffic, so equal K alone establishes neither quality nor cost matching (S7).

Metrics. Primary quality is task-score AVG over each fixed benchmark/length set; per-task gains and losses explain AVG without a zero-loss requirement. Policy-matched controls require matched models, samples, lengths, scorers, phase policies and aligned sparse-token budgets; incomplete sets lack full-set AVG. Panel (b) reports regional missed-reference-mass shares normalized by each query's total reference mass and averaged over correlated observations; panel (c) uses full-dimensional reference mid-TopK mass. Neither selector time (synthetic single-layer) nor synchronized TPOT (model-level post-first-output intervals) measures preparation-inclusive complete-request latency. Unpaired quality and timing studies do not define a quality–latency frontier; AVG differences are descriptive, not statistical non-inferiority evidence.

V. Evaluation and Discussion

A. Q1: Does reduced scoring width preserve task quality?

On HotpotQA, Qasper, MuSiQue, GovReport and RepoBench-P [10], five-task means fall within a 0.33-point spread: shared-subspace 47.588, the nominal page variant 47.910 and the token variant 47.666 (Supplementary Fig. S4); the shared-subspace arm trails the two variants by 0.322 and 0.078. These differences describe recorded configurations, not evidence that reduced width preserves quality: the variants are not verified single-factor interventions, and the shared-subspace run uses earlier 128/128 protection. All three arms are sparse; dense FullKV is a different reference.

B. Q2: How do regional budgets constrain candidate access?

Figure 1(b) shows regional missed-mass profiles of global selectors, not a benefit from regional quotas; the fixed-cap hybrid scan also retains a negative result (.135 versus .121). Reported 8B 32K AVG rises 58.30→59.29 when near quotas move $(16, 640) \to (8, 320)$ at $K_1 = 128$, $K = 1024$, protection 4/128 (archived $\beta = .125 \to .0625$); far pages rise 112→120 and the far token budget 252→572 jointly. At archived $\beta = .03125$, $K_1 = 128$ scores 58.07 (near pages 4, far tokens 732); $K_1 = 256$ scores 58.96 (near quotas $(8, 320)$; far pages 248 versus 120 for the 59.29 arm). Both score below 59.29; $K_1 = 256$ CWE/FWE differences from that reference are $+3.9/-9.67$. Data/scorer records match these sparse arms; predictions remain unreplayed.

Implicit coupling failures. Archived diagnostics exhibit all three reallocations of Eq. (2). Integer enumeration of the archived formulas locates the first far-zero page cap at $K_1 = 156$ for $K = 1024$ ($B = 64$, $\beta = .125$, $\gamma = .625$, 128/128 protection); far budget 8 remains at $K_1 = 155$, so capacity appears to grow while far tokens vanish. Archived task scans collapse HotpotQA from 53.6–57.3 to 37.7 exactly on zero-far-budget arms, graded by far fraction (16.4 points at .875, about 1 at .125). At the archived grid cell $(\alpha, \beta) = (.25, .125)$, free competition ties the best γ within .001 in retained-mass diagnostics (.852 versus .8515), while $\gamma = 0$ reads as far-free but zeroes the near token quota, dropping retained mass

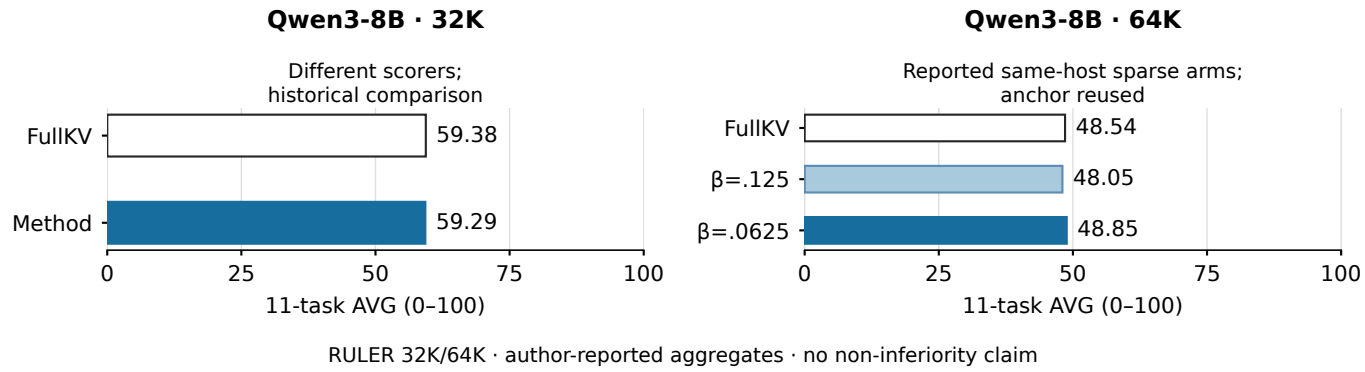


Fig. 3. Author-reported Qwen3-8B RULER 32K/64K AVG: 11 tasks, 100 examples/task/arm. FullKV is dense; sparse arms report $K = 1024$, protection 4/128. The 32K panel shows near quotas (8,320); the 64K panel includes (8,320) and (16,640). The 32K comparison spans machines with different scorers; the 64K sparse arms are reported on one machine, the FullKV anchor a separate run. Gate status and scoring dimensions are unverified. These descriptive scores establish neither non-inferiority nor matched quality–cost benefit (S8).

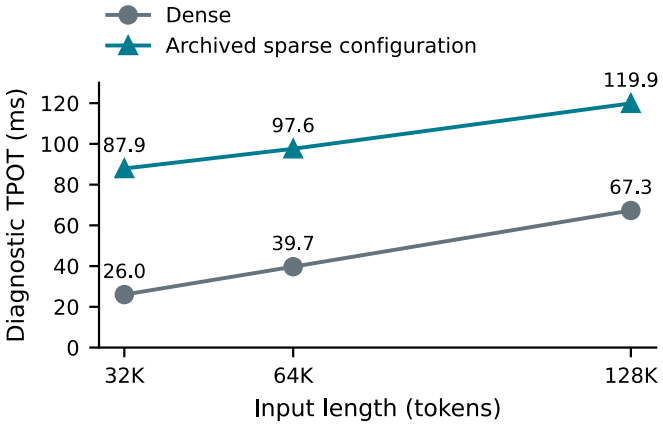


Fig. 4. Author-reported model-level decode TPOT for an archived sparse configuration and dense FullKV, Qwen3-8B with dynamic cache. Fixed 128-token output gives 127 after-first intervals, including synchronization and argmax. The archived $(.125, .375, .625)$ setting differs from the selected 4/128 candidate; these medians measure no complete-request E2E and establish no matched quality–cost comparison (S6).

to .827. The historical 128K RULER arm computed $k_f = 0$ under its reported budgets (S6). These archived diagnostics unify the three anomalies but are not new controlled experiments.

Reported 32K AVG gaps to dense FullKV are -0.09 (8B) and -1.58 (32B), with comparisons across machines and different scoring protocols for 8B. At 64K, 8B AVGs are 48.85/48.05 for near quotas (8,320)/(16,640), versus 48.54 for a separate-run dense anchor. The sparse arms share a machine and scorer, but prediction protocols differ; the dense comparison also uses a different scorer. These descriptive comparisons establish neither causality nor statistical non-inferiority (S8).

Ported baselines. Author-reported AVGs (nominal 512): 56.00 (ours) and 48.33 (AsyncTLS), a reported 7.67-point gap; final unique-token budgets, protection and execution phases have not been matched (S8). At $K = 1024$, 59.29 compares with JSSA's 58.7 (nominal 1024), Quest's 42.85 and FASA's 18.64; $K = 384$ scores 15.00. Cross-machine Llama-3.1-8B: 83.88/86.19 at near quotas (8,320)/(16,640). S8 gives provenance, CWE's 43.4-point loss and absent paired intervals.

At 128K, the (8,320)/(16,640) arms score 45.73/46.02 on one machine; 45.73 is 98.49% of the separate-run dense anchor, 46.43. Historical RULER 128K yields 23.98 (sparse) under budgets implying $k_f = 0$, execution unverified, the 22.45-point loss unexplained (S6). Five-task LongBench means are 26.09 (protection-only, 256 tokens) versus 47.91 (reused sparse, 1024); retrieval and budget both change.

C. Q3: Does compact scoring reduce execution cost?

Model-level decoding. The reported sparse configuration is slower than dense FullKV at every measured length (Fig. 4). Sparse TPOT medians are 87.9, 97.6 and 119.9 ms at 32K, 64K and 128K, compared with dense medians of 26.0, 39.7 and 67.3 ms. The relative penalty shrinks with length, but absolute sparse TPOT increases: no decode-time benefit. Timings include synchronization and argmax, use a non-compact configuration, and cannot locate causes or predict the compact implementation (S6).

Local selector cost. A separate two-round synthetic experiment (single layer, batch one, one query, 64K QKV) reports steady-state summaries of 1.3502 ms (full-dimensional page variant), 1.3598 ms (shared-subspace) and 1.4634 ms (token variant); shared-subspace runs 0.0237 ms slower in round one and 0.0046 ms faster in round two. Missing raw sequences and an unresolved sampling discrepancy prevent assessing these small differences (S6). These local timings identify no bottleneck, lack quality pairing and measure no complete-request cost.

D. Optional gate: prefill is not a decode guarantee

Low prefill attention does not establish safe decode-time skipping. An archived input–layer record pairs a prefill far-attention proxy below .05 with a decode-tail mean of .1678 over five queries: a proxy shift, not measured quality loss. Gate thresholds .05 and .10 yield five-task AVGs of 47.876 and 47.692 against the reused 47.910 reference, down .034 and .218, with three tasks declining per arm, led by HotpotQA's 1.05 and 1.26. AVG remains primary; no per-task zero-loss requirement applies. Neither these changes nor zero-containing task-bootstrap intervals establish non-inferiority; missing scoring configurations, paired predictions and matched costs leave gated quality and net savings unverified (S6).

Design implications and limitations. Two constraints recur: reduced scoring width narrows each dot product while ordinary L2 still scores the full history, and far-page quotas admit candidates without guaranteeing far-token capacity. A useful operating point reduces complete-request latency at matched quality, counting preparation, maintenance and selection once. The archived sparse configuration

decodes slower than dense, selector timings establish no request-level benefit, and matched measurements for the compact design remain missing; historical gate summaries lack complete configuration identity.

VI. Conclusion

We studied shared low-frequency page/token scoring and absolute regional budgets, retaining original-dimensional final attention. The analysis distinguishes scoring width from work, far-page from far-token coverage, and explicit quotas from coupled ratio-derived capacities permitting all three archived reallocations. Author-reported Qwen3-8B RULER 32K AVG is 0.99 points higher at near quotas (8,320) than at (16,640), changing both quotas. At $\beta = .03125$, $K_1 = 128/256$ arms score 58.07/58.96 (near-page quotas 4/8), both below 59.29. A Qwen3-32B sparse arm trails dense by 1.58 points; at 128K (8,320) reaches 98.49% of a separate-run dense anchor, and Llama-3.1-8B's (8,320) trails (16,640) by 2.31 points at 32K across machines. These descriptive results neither isolate mechanisms nor establish non-inferiority. Historical 128K loss and slower sparse decoding remain limitations; compact 4/128 still needs matched quality and complete-request cost.

Content Generated by AI. OpenAI models via Codex assisted drafting, revision, translation, figures, code and source checks; no model-version identifiers were exposed.

References

[1] J. Tang, Y. Zhao, K. Zhu, G. Xiao, B. Kasikci, and S. Han, "Quest: Query-Aware Sparsity for Efficient Long-Context LLM Inference," in *ICML*, 2024. https://arxiv.org/abs/2406.10774.

[2] L. Ribar, I. Chelombiev, L. Hudlass-Galley, C. Blake, C. Luschi, and D. Orr, "SparQ Attention: Bandwidth-Efficient LLM Inference," in *ICML*, 2024, pp. 42558–42583. https://proceedings.mlr.press/v235/ribar24a.html.

[3] Y. Xu *et al.*, "HISA: Efficient Hierarchical Indexing for Fine-Grained Sparse Attention," in *COLM*, 2026. https://arxiv.org/abs/2603.28458v4.

[4] Hu *et al.*, "AsyncTLS: Efficient Generative LLM Inference with Asynchronous Two-level Sparse Attention," arXiv:2604.07815v1, Apr. 9, 2026. https://arxiv.org/abs/2604.07815v1.

[5] Z. Liu, Z. Ning, R. Li, X. Liu, Y. Song, M. Zhang, Z. He, and X. Qiu, "Faster Than Flash: Exploiting Attention Sparsity for Efficient Long-Context Decoding," in *ICML*, 2026, pp. 77913–77928. https://proceedings.mlr.press/v306/liu26da.html.

[6] H. Sun *et al.*, "ShadowKV: KV Cache in Shadows for High-Throughput Long-Context LLM Inference," in *ICML*, 2025, pp. 57355–57373. https://proceedings.mlr.press/v267/sun25b.html.

[7] Z. Wang et al., "MILLION: MasterIng Long-Context LLM Inference Via Outlier-Immunized KV Product QuaNtization," in *2025 62nd ACM/IEEE Design Automation Conference (DAC)*, 2025, pp. 1–7, doi: 10.1109/DAC63849.2025.11132862.

[8] G. Liu, C. Li, J. Zhao, C. Zhang, and M. Guo, "ClusterKV: Manipulating LLM KV Cache in Semantic Space for Recallable Compression," in *DAC*, 2025. https://doi.org/10.1109/DAC63849.2025.11132479.

[9] G. Shen, J. Zhao, Q. Chen, J. Leng, C. Li, and M. Guo, "SALO: An Efficient Spatial Accelerator Enabling Hybrid Sparse Attention Mechanisms for Long Sequences," in *DAC*, 2022, pp. 571–576. https://doi.org/10.1145/3489517.3530504.

[10] Y. Bai *et al.*, "LongBench: A Bilingual, Multitask Benchmark for Long Context Understanding," in *ACL*, 2024, pp. 3119–3137. https://aclanthology.org/2024.acl-long.172/.

[11] C.-P. Hsieh *et al.*, "RULER: What's the Real Context Size of Your Long-Context Language Models?," in *COLM*, 2024. https://arxiv.org/abs/2404.06654.

[12] G. Xiao, Y. Tian, B. Chen, S. Han, and M. Lewis, "Efficient Streaming Language Models with Attention Sinks," in *ICLR*, 2024. https://arxiv.org/abs/2309.17453v4.

[13] J. Park, M. Kang, Y. Han, Y.-G. Kim, J. Shin, and L.-S. Kim, "TokenPicker: Accelerating Attention in Text Generation with Minimized Memory Transfer via Probability Estimation," in *DAC*, 2024, doi: 10.1145/3649329.3655953.