



head = tail = 0

1. 初始:



$n = 6$. 实际可入队 5 个元素, tail 为空

2. 入队 4 个元素

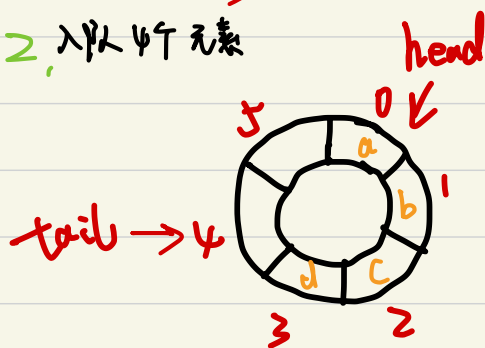

过程:

i $e[tail] = e[0] = "a"$

$tail = (tail + 1) \% 6 = 1$

ii $e[tail] = e[1] = "b"$


$tail = (1 + 1) \% 6 = 2$

...

3. 入队 1 个元素 "e"

i $e[4] = "e"$, $tail = 5$.

4. 出队 2 个元素

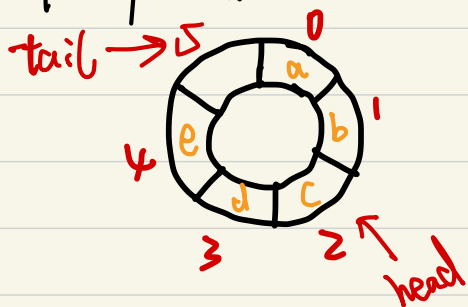


i a 出队. (数组本身并未改变)

$head = (head + 1) \% 6 = 1$

ii b 出队. $head = (1 + 1) \% 6 = 2$.

5. 再次入队 2 个元素 f, g.

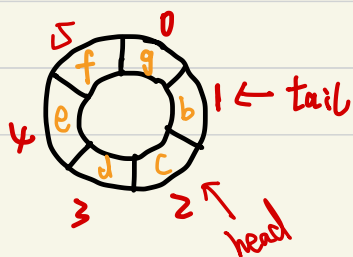

i $e[tail] = e[5] = "f"$

$tail = (5 + 1) \% 6 = 0$

ii $e[tail] = e[0] = "g"$, $tail = 1$

此时, 按序打印队列的结果为:

c d e f g ($e[0]$ 为队尾, 忽略)