


Space X Falcon 9 First Stage Landing Prediction

Web scraping Falcon 9 and Falcon Heavy Launches Records from Wikipedia

Estimated time needed: **40** minutes

In this lab, you will be performing web scraping to collect Falcon 9 historical launch records from a Wikipedia page titled `List of Falcon 9 and Falcon Heavy launches`

https://en.wikipedia.org/wiki/List_of_Falcon_9_and_Falcon_Heavy_launches

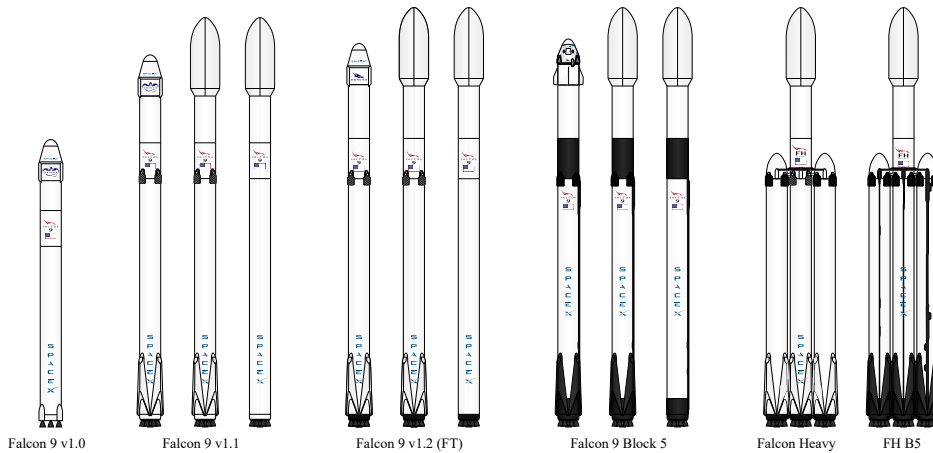

Falcon 9 first stage will land successfully



Several examples of an unsuccessful landing are shown here:



More specifically, the launch records are stored in a HTML table shown below:

2020 [edit]

In late 2019, [Gwynne Shotwell](#) stated that SpaceX hoped for as many as 24 launches for Starlink satellites in 2020,^[490] in addition to 14 or 15 non-Starlink launches. At 26 launches, 13 of which for Starlink satellites, Falcon 9 had its most prolific year, and Falcon rockets were second most prolific rocket family of 2020, only behind China's [Long March](#) rocket family.^[491]

[hide] Flight No.	Date and time (UTC)	Version, Booster ^[b]	Launch site	Payload ^[c]	Payload mass	Orbit	Customer	Launch outcome	Booster landing
78	7 January 2020, 02:19:21 ^[492]	F9 B5 Δ B1049.4	CCAFS, SLC-40	Starlink 2 v1.0 (60 satellites)	15,600 kg (34,400 lb) ^[5]	LEO	SpaceX	Success	Success (drone ship)
79	19 January 2020, 15:30 ^[494]	F9 B5 Δ B1046.4	KSC, LC-39A	Crew Dragon In-flight abort test ^[495] (Dragon C205.1)	12,050 kg (26,570 lb)	Sub-orbital ^[496]	NASA (CTS) ^[497]	Success	No attempt
	An atmospheric test of the Dragon 2 abort system after Max Q . The capsule fired its SuperDraco engines, reached an apogee of 40 km (25 mi), deployed parachutes after reentry, and splashed down in the ocean 31 km (19 mi) downrange from the launch site. The test was previously slated to be accomplished with the Crew Dragon Demo-1 capsule, ^[498] but that test article exploded during a ground test of SuperDraco engines on 20 April 2019. ^[415] The abort test used the capsule originally intended for the first crewed flight. ^[499] As expected, the booster was destroyed by aerodynamic forces after the capsule aborted. ^[500] First flight of a Falcon 9 with only one functional stage — the second stage had a mass simulator in place of its engine.								
80	29 January 2020, 14:07 ^[501]	F9 B5 Δ B1051.3	CCAFS, SLC-40	Starlink 3 v1.0 (60 satellites)	15,600 kg (34,400 lb) ^[6]	LEO	SpaceX	Success	Success (drone ship)
81	17 February 2020, 15:05 ^[503]	F9 B5 Δ B1056.4	CCAFS, SLC-40	Starlink 4 v1.0 (60 satellites)	15,600 kg (34,400 lb) ^[6]	LEO	SpaceX	Success	Failure (drone ship)
	Third operational and fourth large batch of Starlink satellites, deployed in a circular 290 km (180 mi) orbit. One of the fairing halves was caught, while the other was fished out of the ocean. ^[502] Fourth operational and fifth large batch of Starlink satellites. Used a new flight profile which deployed into a 212 km × 386 km (132 mi × 240 mi) elliptical orbit instead of launching into a circular orbit and firing the second stage engine twice. The first stage booster failed to land on the drone ship ^[504] due to incorrect wind data. ^[505] This was the first time a flight proven booster failed to land.								
82	7 March 2020, 04:50 ^[506]	F9 B5 Δ B1059.2	CCAFS, SLC-40	SpaceX CRS-20 (Dragon C112.3 Δ)	1,977 kg (4,359 lb) ^[507]	LEO (ISS)	NASA (CRS)	Success	Success (ground pad)
83	18 March 2020, 12:16 ^[510]	F9 B5 Δ B1048.5	KSC, LC-39A	Starlink 5 v1.0 (60 satellites)	15,600 kg (34,400 lb) ^[5]	LEO	SpaceX	Success	Failure (drone ship)
	Last launch of phase 1 of the CRS contract. Carries Barbollomeo , an ESA platform for hosting external payloads onto ISS. ^[508] Originally scheduled to launch on 2 March 2020, the launch date was pushed back due to a second stage engine failure. SpaceX decided to swap out the second stage instead of replacing the faulty part. ^[509] It was SpaceX's 50th successful landing of a first stage booster, the third flight of the Dragon C112 and the last launch of the cargo Dragon spacecraft. Fifth operational launch of Starlink satellites. It was the first time a first stage booster flew for a fifth time and the second time the fairings were reused (Starlink flight in May 2019). ^[511] Towards the end of the first stage burn, the booster suffered premature shut down of an engine, the first of a Merlin 1D variant and first since the CRS-1 mission in October 2012. However, the payload still reached the targeted orbit. ^[512] This was the second Starlink launch booster landing failure in a row, later revealed to be caused by residual cleaning fluid trapped inside a sensor. ^[513]								
84	22 April 2020, 19:30 ^[514]	F9 B5 Δ B1051.4	KSC, LC-39A	Starlink 6 v1.0 (60 satellites)	15,600 kg (34,400 lb) ^[5]	LEO	SpaceX	Success	Success (drone ship)

Objectives

Web scrap Falcon 9 launch records with BeautifulSoup :

- Extract a Falcon 9 launch records HTML table from Wikipedia
- Parse the table and convert it into a Pandas data frame

First let's import required packages for this lab

```
In [1]: !pip3 install beautifulsoup4
!pip3 install requests
```

```
Requirement already satisfied: beautifulsoup4 in c:\users\91939\anaconda3\nani\lib\site-packages (4.12.3)
Requirement already satisfied: soupsieve>1.2 in c:\users\91939\anaconda3\nani\lib\site-packages (from beautifulsoup4) (2.5)
Requirement already satisfied: requests in c:\users\91939\anaconda3\nani\lib\site-packages (2.32.2)
Requirement already satisfied: charset-normalizer<4,>=2 in c:\users\91939\anaconda3\nani\lib\site-packages (from requests) (2.0.4)
Requirement already satisfied: idna<4,>=2.5 in c:\users\91939\anaconda3\nani\lib\site-packages (from requests) (3.7)
Requirement already satisfied: urllib3<3,>=1.21.1 in c:\users\91939\anaconda3\nani\lib\site-packages (from requests) (2.2.2)
Requirement already satisfied: certifi>=2017.4.17 in c:\users\91939\anaconda3\nani\lib\site-packages (from requests) (2024.6.2)
```

```
In [2]: import sys

import requests
from bs4 import BeautifulSoup
import re
import unicodedata
import pandas as pd
```

and we will provide some helper functions for you to process web scraped HTML table

```
In [3]: def date_time(table_cells):
        """
        This function returns the data and time from the HTML table cell
        Input: the element of a table data cell extracts extra row
        """
        return [data_time.strip() for data_time in list(table_cells.strings)][0:2]

    def booster_version(table_cells):
        """
        This function returns the booster version from the HTML table cell
        Input: the element of a table data cell extracts extra row
        """
        out=''.join([booster_version for i,booster_version in enumerate(table_cells.strings)])
        return out

    def landing_status(table_cells):
        """
        This function returns the landing status from the HTML table cell
        Input: the element of a table data cell extracts extra row
        """
        out=[i for i in table_cells.strings][0]
        return out

    def get_mass(table_cells):
```

```

mass=unicodedata.normalize("NFKD", table_cells.text).strip()
if mass:
    mass.find("kg")
    new_mass=mass[0:mass.find("kg")+2]
else:
    new_mass=0
return new_mass

def extract_column_from_header(row):
    """
    This function returns the landing status from the HTML table cell
    Input: the element of a table data cell extracts extra row
    """
    if (row.br):
        row.br.extract()
    if row.a:
        row.a.extract()
    if row.sup:
        row.sup.extract()

    column_name = ' '.join(row.contents)

    # Filter the digit and empty names
    if not(column_name.strip().isdigit()):
        column_name = column_name.strip()
    return column_name

```

To keep the lab tasks consistent, you will be asked to scrape the data from a snapshot of the `List of Falcon 9 and Falcon Heavy launches` Wikipage updated on `9th June 2021`

In [4]: `static_url = "https://en.wikipedia.org/w/index.php?title=List_of_Falcon_9_and_Fa`

Next, request the HTML page from the above URL and get a `response` object

TASK 1: Request the Falcon9 Launch Wiki page from its URL

First, let's perform an HTTP GET method to request the Falcon9 Launch HTML page, as an HTTP response.

In [5]: `# use requests.get() method with the provided static_url`
`# assign the response to a object`
`# use requests.get() method with the provided static_url`
`# assign the response to a object`
`html_data = requests.get(static_url)`
`html_data.status_code`

Out[5]: 200

Create a `BeautifulSoup` object from the HTML `response`

In [6]: `# Use BeautifulSoup() to create a BeautifulSoup object from a response text cont`
`soup = BeautifulSoup(html_data.text, 'html.parser')`

Print the page title to verify if the `BeautifulSoup` object was created properly

```
In [7]: # Use soup.title attribute
        soup.title
```

```
Out[7]: <title>List of Falcon 9 and Falcon Heavy launches - Wikipedia</title>
```

TASK 2: Extract all column/variable names from the HTML table header

Next, we want to collect all relevant column names from the HTML table header

Let's try to find all tables on the wiki page first. If you need to refresh your memory about BeautifulSoup, please check the external reference link towards the end of this lab

```
In [8]: # Use the find_all function in the BeautifulSoup object, with element type `table`
        # Assign the result to a list called `html_tables`
        html_tables = soup.find_all('table')
```

Starting from the third table is our target table contains the actual launch records.

```
In [9]: # Let's print the third table and check its content
        first_launch_table = html_tables[2]
        print(first_launch_table)
```

```

<table class="wikitable plainrowheaders collapsible" style="width: 100%;">
<tbody><tr>
<th scope="col">Flight No.
</th>
<th scope="col">Date and<br/>time (<a href="/wiki/Coordinated_Universal_Time" tit
le="Coordinated Universal Time">UTC</a>)
</th>
<th scope="col"><a href="/wiki/List_of_Falcon_9_first-stage_boosters" title="List
of Falcon 9 first-stage boosters">Version,<br/>Booster</a> <sup class="reference"
id="cite_ref-booster_11-0"><a href="#cite_note-booster-11">[b]</a></sup>
</th>
<th scope="col">Launch site
</th>
<th scope="col">Payload<sup class="reference" id="cite_ref-Dragon_12-0"><a href
="#cite_note-Dragon-12">[c]</a></sup>
</th>
<th scope="col">Payload mass
</th>
<th scope="col">Orbit
</th>
<th scope="col">Customer
</th>
<th scope="col">Launch<br/>outcome
</th>
<th scope="col"><a href="/wiki/Falcon_9_first-stage_landing_tests" title="Falcon
9 first-stage landing tests">Booster<br/>landing</a>
</th></tr>
<tr>
<th rowspan="2" scope="row" style="text-align:center;">1
</th>
<td>4 June 2010,<br/>18:45
</td>
<td><a href="/wiki/Falcon_9_v1.0" title="Falcon 9 v1.0">F9 v1.0</a><sup class="re
ference" id="cite_ref-MuskMay2012_13-0"><a href="#cite_note-MuskMay2012-13">[7]</
a></sup><br/>B0003.1<sup class="reference" id="cite_ref-block_numbers_14-0"><a hr
ef="#cite_note-block_numbers-14">[8]</a></sup>
</td>
<td><a href="/wiki/Cape_Canaveral_Space_Force_Station" title="Cape Canaveral Spac
e Force Station">CCAFS</a>,<br/><a href="/wiki/Cape_Canaveral_Space_Launch_Comple
x_40" title="Cape Canaveral Space Launch Complex 40">SLC-40</a>
</td>
<td><a href="/wiki/Dragon_Spacecraft_Qualification_Unit" title="Dragon Spacecraft
Qualification Unit">Dragon Spacecraft Qualification Unit</a>
</td>
<td>
</td>
<td>
</td>
<td><a href="/wiki/Low_Earth_orbit" title="Low Earth orbit">LEO</a>
</td>
<td><a href="/wiki/SpaceX" title="SpaceX">SpaceX</a>
</td>
<td class="table-success" style="background: #9EFF9E; vertical-align: middle; tex
t-align: center;">Success
</td>
<td class="table-failure" style="background: #FFC7C7; vertical-align: middle; tex
t-align: center;">Failure<sup class="reference" id="cite_ref-ns20110930_15-0"><a
href="#cite_note-ns20110930-15">[9]</a></sup><sup class="reference" id="cite_ref-
16"><a href="#cite_note-16">[10]</a></sup><br/><small>(parachute)</small>
</td></tr>
<tr>
<td colspan="9">First flight of Falcon 9 v1.0.<sup class="reference" id="cite_ref

```

[sfn20100604_17-0](#)>[11]</sup> Used a boilerplate version of Dragon capsule which was not designed to separate from the second stage.<small>more details below</small> Attempted to recover the first stage by parachuting it into the ocean, but it burned up on reentry, before the parachutes even deployed.^{[12]}</td></tr>
 <tr>
 <th rowspan="2" scope="row" style="text-align:center;">2
 <td>8 December 2010,
15:43^{[13]}
 </td>
 </tr>
 <tr>
 <td>F9 v1.0^{[7]}
B0004.1^{[8]}
 </td>
 </tr>
 <tr>
 <td>CCAFS,
SLC-40
 </td>
 </tr>
 <tr>
 <td>Dragon demo flight C1
(Dragon C101)
 </td>
 </tr>
 <tr>
 <td>LEO (ISS)
 </td>
 </tr>
 <tr>
 <td><style data-mw-deduplicate="TemplateStyles:r1126788409">.mw-parser-output .plainlist ol,.mw-parser-output .plainlist ul{line-height:inherit;list-style:none;margin:0;padding:0}.mw-parser-output .plainlist ol li,.mw-parser-output .plainlist ul li{margin-bottom:0}</style><div class="plainlist">
 NASA (COTS)
 NRO
 </div>
 </td>
 </tr>
 <tr>
 <td class="table-success" style="background: #9EFF9E; vertical-align: middle; text-align: center;">Success^{[9]}
 </td>
 </tr>
 <tr>
 <td class="table-failure" style="background: #FFC7C7; vertical-align: middle; text-align: center;">Failure^{[9]}^{[14]}
<small>(parachute)</small>
 </td>
 </tr>
 <tr>
 <td colspan="9">Maiden flight of Dragon capsule, consisting of over 3 hours of testing thruster maneuvering and reentry.^{[15]} Attempted to recover the first stage by parachuting it into the ocean, but it disintegrated upon reentry, before the parachutes were deployed.^{[12]}
 </td>
 </tr>
 </table>

ote-parachute-18">[12]</sup> <small>(more details below)</small> It also included two CubeSats,^{[16]} and a wheel of Brouère cheese.

</td></tr>

<tr>

<th rowspan="2" scope="row" style="text-align:center;">3

</th>

<td>22 May 2012,
07:44^{[17]}

</td>

<td>F9 v1.0^{[7]}
B0005.1^{[8]}

</td>

<td>CCAFS,
SLC-40

</td>

<td>Dragon demo flight C2+^{[18]}
(Dragon C102)

</td>

<td>525 kg (1,157 lb)^{[19]}

</td>

<td>LEO (ISS)

</td>

<td>NASA (COTS)

</td>

<td class="table-success" style="background: #9EFF9E; vertical-align: middle; text-align: center;">Success^{[20]}

</td>

<td class="table-noAttempt" style="background: #EEE; vertical-align: middle; white-space: nowrap; text-align: center;">No attempt

</td></tr>

<tr>

<td colspan="9">Dragon spacecraft demonstrated a series of tests before it was allowed to approach the International Space Station. Two days later, it became the first commercial spacecraft to board the ISS.^{[17]} <small>(more details below)</small>

</td></tr>

<tr>

<th rowspan="3" scope="row" style="text-align:center;">4

</th>

<td rowspan="2">8 October 2012,
00:35^{[21]}

</td>

<td rowspan="2">F9 v1.0<sup class="reference" id="cite_ref-MuskMay2012_13-3"><a href="#cite_note-MuskMay20

12-13">[7]</sup>
B0006.1^{[8]}
</td>
<td rowspan="2">CCAFS,
SLC-40
</td>
<td>SpaceX CRS-1^{[22]}
(Dragon C103)
</td>
<td>4,700 kg (10,400 lb)
</td>
<td>LEO (ISS)
</td>
<td>NASA (CRS)
</td>
<td class="table-success" style="background: #9EFF9E; vertical-align: middle; text-align: center;">Success
</td>
<td rowspan="2" style="background:#ecec; text-align:center;">No attempt
</td></tr>
<tr>
<td>Orbcomm-OG2^{[23]}
</td>
<td>172 kg (379 lb)^{[24]}
</td>
<td>LEO
</td>
<td>Orbcomm
</td>
<td class="table-partial" style="background: #FFB; vertical-align: middle; text-align: center;">Partial failure^{[25]}
</td></tr>
<tr>
<td colspan="9">CRS-1 was successful, but the secondary payload was inserted into an abnormally low orbit and subsequently lost. This was due to one of the nine Merlin engines shutting down during the launch, and NASA declining a second reignition, as per ISS visiting vehicle safety rules, the primary payload owner is contractually allowed to decline a second reignition. NASA stated that this was because SpaceX could not guarantee a high enough likelihood of the second stage completing the second burn successfully which was required to avoid any risk of secondary payload's collision with the ISS.^{[26]}^{[27]}^{[28]}
</td></tr>
<tr>
<th rowspan="2" style="text-align:center;">5
</th>

```

<td>1 March 2013,<br/>15:10
</td>
<td><a href="/wiki/Falcon_9_v1.0" title="Falcon 9 v1.0">F9 v1.0</a><sup class="reference" id="cite_ref-MuskMay2012_13-4"><a href="#cite_note-MuskMay2012-13">[7]</a></sup><br/>B0007.1<sup class="reference" id="cite_ref-block_numbers_14-4"><a href="#cite_note-block_numbers-14">[8]</a></sup>
</td>
<td><a href="/wiki/Cape_Canaveral_Space_Force_Station" title="Cape Canaveral Space Force Station">CCAFS</a>,<br/><a href="/wiki/Cape_Canaveral_Space_Launch_Complex_40" title="Cape Canaveral Space Launch Complex 40">SLC-40</a>
</td>
<td><a href="/wiki/SpaceX_CRS-2" title="SpaceX CRS-2">SpaceX CRS-2</a><sup class="reference" id="cite_ref-sxManifest20120925_28-1"><a href="#cite_note-sxManifest20120925-28">[22]</a></sup><br/>(Dragon C104)
</td>
<td>4,877 kg (10,752 lb)
</td>
<td><a href="/wiki/Low_Earth_orbit" title="Low Earth orbit">LEO</a> (<a class="mw-redirect" href="/wiki/ISS" title="ISS">ISS</a>)
</td>
<td><a href="/wiki/NASA" title="NASA">NASA</a> (<a href="/wiki/Commercial_Resupply_Services" title="Commercial Resupply Services">CRS</a>)
</td>
<td class="table-success" style="background: #9EFF9E; vertical-align: middle; text-align: center;">Success
</td>
<td class="table-noAttempt" style="background: #EEE; vertical-align: middle; white-space: nowrap; text-align: center;">No attempt
</td></tr>
<tr>
<td colspan="9">Last launch of the original Falcon 9 v1.0 <a href="/wiki/Launch_vehicle" title="Launch vehicle">launch vehicle</a>, first use of the unpressurized trunk section of Dragon.<sup class="reference" id="cite_ref-sxf9_20110321_35-0"><a href="#cite_note-sxf9_20110321-35">[29]</a></sup>
</td></tr>
<tr>
<th rowspan="2" scope="row" style="text-align:center;">6
</th>
<td>29 September 2013,<br/>16:00<sup class="reference" id="cite_ref-pa20130930_36-0"><a href="#cite_note-pa20130930-36">[30]</a></sup>
</td>
<td><a href="/wiki/Falcon_9_v1.1" title="Falcon 9 v1.1">F9 v1.1</a><sup class="reference" id="cite_ref-MuskMay2012_13-5"><a href="#cite_note-MuskMay2012-13">[7]</a></sup><br/>B1003<sup class="reference" id="cite_ref-block_numbers_14-5"><a href="#cite_note-block_numbers-14">[8]</a></sup>
</td>
<td><a class="mw-redirect" href="/wiki/Vandenberg_Air_Force_Base" title="Vandenberg Air Force Base">VAFB</a>,<br/><a href="/wiki/Vandenberg_Space_Launch_Complex_4" title="Vandenberg Space Launch Complex 4">SLC-4E</a>
</td>
<td><a href="/wiki/CASSIOPE" title="CASSIOPE">CASSIOPE</a><sup class="reference" id="cite_ref-sxManifest20120925_28-2"><a href="#cite_note-sxManifest20120925-28">[22]</a></sup><sup class="reference" id="cite_ref-CASSIOPE_MDA_37-0"><a href="#cite_note-CASSIOPE_MDA-37">[31]</a></sup>
</td>
<td>500 kg (1,100 lb)
</td>
<td><a href="/wiki/Polar_orbit" title="Polar orbit">Polar orbit</a> <a href="/wiki/Low_Earth_orbit" title="Low Earth orbit">LEO</a>
</td>

```

[MDA](/wiki/Maxar_Technologies "Maxar Technologies")

Success^{[\[30\]](#cite_note-pa20130930_36-1)}

Uncontrolled^{[\[30\]](#cite_note-ocean_landing_38-0)} (ocean)

First commercial mission with a private customer, first launch from Vandenberg, and demonstration flight of Falcon 9 v1.1 with an improved 13-tonne to LEO capacity.^{[\[29\]](#cite_ref-sxf9_20110321_35-1)} After separation from the second stage carrying Canadian commercial and scientific satellites, the first stage booster performed a controlled reentry,^{[\[32\]](#cite_ref-39)} and an [ocean touchdown test](/wiki/Falcon_9_first-stage_landing_tests "Falcon 9 first-stage landing tests") for the first time. This provided good test data, even though the booster started rolling as it neared the ocean, leading to the shutdown of the central engine as the roll depleted it of fuel, resulting in a hard impact with the ocean.^{[\[30\]](#cite_ref-pa20130930_36-2)} This was the first known attempt of a rocket engine being lit to perform a supersonic retro propulsion, and allowed SpaceX to enter a public-private partnership with [NASA](/wiki/NASA "NASA") and its Mars entry, descent, and landing technologies research projects.^{[\[33\]](#cite_ref-40)} ([more details below](#Maiden_flight_of_v1.1))

7

3 December 2013,^{[\[34\]](#cite_ref-sfn_wwls20130624_41-0)}

[F9 v1.1](/wiki/Falcon_9_v1.1 "Falcon 9 v1.1")
B1004

[CCAFS](/wiki/Cape_Canaveral_Space_Force_Station "Cape Canaveral Space Force Station"),
[SLC-40](/wiki/Cape_Canaveral_Space_Launch_Complex_40 "Cape Canaveral Space Launch Complex 40")

[SES-8](/wiki/SES-8 "SES-8")^{[\[22\]](#cite_ref-sxManifest20120925_28-3)}
^{[\[35\]](#cite_ref-spx-pr_42-0)}^{[\[36\]](#cite_ref-aw20110323_43-0)}

3,170 kg (6,990 lb)

[GT0](/wiki/Geostationary_transfer_orbit "Geostationary transfer orbit")

[SES](/wiki/SES_S.A. "SES S.A.")

Success^{[\[37\]](#cite_ref-SNMissionStatus7_44-0)}

```
 No attempt <a href="#cite_note-sf10120131203-45">[38]</a></sup> || First Geostationary transfer orbit (GTO) launch for Falcon 9,<a href="#cite_note-spx-pr-42">[35]</a></sup> and first successful reignition of the second stage.<a href="#cite_note-46">[39]</a></sup> SES-8 was inserted into a Super-Synchronous Transfer Orbit of 79,341 km (49,300 mi) in a poguee with an inclination of 20.55° to the equator. | | | | | | | | |

```

You should be able to see the column names embedded in the table header elements

`<th>` as follows:

```
| Flight No. | Date and time (UTC) | Version, Booster <a href="#cite_note-booster-11">[b] | Launch site | Payload<a href="#cite_note-Dragon-12">[c]</a></sup> | Payload mass | Orbit | Customer | Launch outcome | Booster landing |
| --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

```

Next, we just need to iterate through the `<th>` elements and apply the provided `extract_column_from_header()` to extract column name one by one

```
In [12]: column_names = []

# Apply find_all() function with `th` element on first_launch_table
# Iterate each th element and apply the provided extract_column_from_header() to
# Append the Non-empty column name (`if name is not None and len(name) > 0`) into
column_names

element = soup.find_all('th')
for row in range(len(element)):
    try:
        name = extract_column_from_header(element[row])
        if (name is not None and len(name) > 0):
            column_names.append(name)
    except:
        pass
```

Check the extracted column names

```
In [13]: print(column_names)

['Flight No.', 'Date and time ( )', 'Launch site', 'Payload', 'Payload mass', 'Orbit', 'Customer', 'Launch outcome', 'Flight No.', 'Date and time ( )', 'Launch site', 'Payload', 'Payload mass', 'Orbit', 'Customer', 'Launch outcome', 'Flight No.', 'Date and time ( )', 'Launch site', 'Payload', 'Payload mass', 'Orbit', 'Customer', 'Launch outcome', 'Flight No.', 'Date and time ( )', 'Launch site', 'Payload', 'Payload mass', 'Orbit', 'Customer', 'Launch outcome', 'Flight No.', 'Date and time ( )', 'Launch site', 'Payload', 'Payload mass', 'Orbit', 'Customer', 'Launch outcome', 'Flight No.', 'Date and time ( )', 'Launch site', 'Payload', 'Payload mass', 'Orbit', 'Customer', 'Launch outcome', 'FH 2', 'FH 3', 'Flight No.', 'Date and time ( )', 'Launch site', 'Payload', 'Payload mass', 'Orbit', 'Customer', 'Launch outcome', 'Date and time ( )', 'Launch site', 'Payload', 'Payload mass', 'Orbit', 'Customer', 'Launch outcome', 'Date and time ( )', 'Launch site', 'Payload', 'Orbit', 'Customer', 'Date and time ( )', 'Launch site', 'Payload', 'Orbit', 'Customer', 'Date and time ( )', 'Launch site', 'Payload', 'Orbit', 'Customer', 'Demonstration', 'logistics', 'Crewed', 'Commercial satellites', 'Scientific satellites', 'Military satellites', 'Rideshares', 'Transporter', 'Bandwagon', 'Current', 'In development', 'Retired', 'Cancelled', 'Spacecraft', 'Cargo', 'Crewed', 'Test vehicles', 'Current', 'Retired', 'Unflown', 'Orbital', 'Atmospheric', 'Landing sites', 'Other facilities', 'Support', 'Contracts', 'R&D programs', 'Key people', 'Related', 'General', 'General', 'People', 'Vehicles', 'Launches by rocket type', 'Launches by spaceport', 'Agencies, companies and facilities', 'Other mission lists and timelines']
```

TASK 3: Create a data frame by parsing the launch HTML tables

We will create an empty dictionary with keys from the extracted column names in the previous task. Later, this dictionary will be converted into a Pandas dataframe

```
In [14]: launch_dict= dict.fromkeys(column_names)

# Remove an irrelevant column
del launch_dict['Date and time ( )']

# Let's initialize the launch_dict with each value to be an empty list
launch_dict['Flight No.'] = []
```

```

launch_dict['Launch site'] = []
launch_dict['Payload'] = []
launch_dict['Payload mass'] = []
launch_dict['Orbit'] = []
launch_dict['Customer'] = []
launch_dict['Launch outcome'] = []
# Added some new columns
launch_dict['Version Booster']=[]
launch_dict['Booster landing']=[]
launch_dict['Date']=[]
launch_dict['Time']=[]

```

Next, we just need to fill up the `launch_dict` with launch records extracted from table rows.

Usually, HTML tables in Wiki pages are likely to contain unexpected annotations and other types of noises, such as reference links `B0004.1[8]` , missing values `N/A [e]` , inconsistent formatting, etc.

To simplify the parsing process, we have provided an incomplete code snippet below to help you to fill up the `launch_dict` . Please complete the following code snippet with TODOs or you can choose to write your own logic to parse all launch tables:

```

In [15]: extracted_row = 0
#Extract each table
for table_number,table in enumerate(soup.find_all('table',"wikitable plainrowhea
# get table row
    for rows in table.find_all("tr"):
        #check to see if first table heading is as number corresponding to Launch
        if rows.th:
            if rows.th.string:
                flight_number=rows.th.string.strip()
                flag=flight_number.isdigit()
            else:
                flag=False
#get table element
row=rows.find_all('td')
#if it is number save cells in a dictionary
if flag:
    extracted_row += 1
    # Flight Number value
    # TODO: Append the flight_number into launch_dict with key `Flight N
    #print(flight_number)
    datatimelist=date_time(row[0])

    # Date value
    # TODO: Append the date into launch_dict with key `Date`
    date = datatimelist[0].strip(',')
    #print(date)

    # Time value
    # TODO: Append the time into launch_dict with key `Time`
    time = datatimelist[1]
    #print(time)

    # Booster version
    # TODO: Append the bv into launch_dict with key `Version Booster`

```

```

bv=booster_version(row[1])
if not(bv):
    bv=row[1].a.string
print(bv)

# Launch Site
# TODO: Append the bv into launch_dict with key `Launch Site`
launch_site = row[2].a.string
#print(launch_site)

# Payload
# TODO: Append the payload into launch_dict with key `Payload`
payload = row[3].a.string
#print(payload)

# Payload Mass
# TODO: Append the payload_mass into launch_dict with key `Payload m
payload_mass = get_mass(row[4])
#print(payload)

# Orbit
# TODO: Append the orbit into launch_dict with key `Orbit`
orbit = row[5].a.string
#print(orbit)

# Customer
# TODO: Append the customer into launch_dict with key `Customer`
customer = row[6].a.string
#print(customer)

# Launch outcome
# TODO: Append the launch_outcome into launch_dict with key `Launch
launch_outcome = list(row[7].strings)[0]
#print(launch_outcome)

# Booster Landing
# TODO: Append the launch_outcome into launch_dict with key `Booster
booster_landing = landing_status(row[8])
#print(booster_landing)

```

F9 v1.0B0003.1
F9 v1.0B0004.1
F9 v1.0B0005.1
F9 v1.0B0006.1
F9 v1.0B0007.1
F9 v1.1B1003
F9 v1.1
F9 v1.1
F9 v1.1
F9 v1.1
F9 v1.1
F9 v1.1
F9 v1.1
F9 v1.1
F9 v1.1
F9 v1.1
F9 FT
F9 v1.1
F9 FT
F9 FT
F9 FT
F9 FT
F9 FT
F9 FT
F9 FT
F9 FT
F9 FT
F9 FT
F9 FT△
F9 FT
F9 FT
F9 FT
F9 FTB1029.2
F9 FT
F9 FT
F9 B4
F9 FT
F9 B4
F9 B4
F9 FTB1031.2
F9 B4
F9 FTB1035.2
F9 FTB1036.2
F9 B4
F9 FTB1032.2
F9 FTB1038.2
F9 B4
F9 B4B1041.2
F9 B4B1039.2
F9 B4
F9 B5B1046.1
F9 B4B1043.2
F9 B4B1040.2
F9 B4B1045.2
F9 B5
F9 B5B1048
F9 B5B1046.2

F9 B5
F9 B5B1048.2
F9 B5B1047.2
F9 B5B1046.3
F9 B5
F9 B5
F9 B5B1049.2
F9 B5B1048.3
F9 B5[268]
F9 B5
F9 B5B1049.3
F9 B5B1051.2
F9 B5B1056.2
F9 B5B1047.3
F9 B5
F9 B5
F9 B5B1056.3
F9 B5
F9 B5
F9 B5
F9 B5
F9 B5
F9 B5
F9 B5
F9 B5
F9 B5
F9 B5
F9 B5B1058.2
F9 B5
F9 B5B1049.6
F9 B5
F9 B5B1060.2
F9 B5B1058.3
F9 B5B1051.6
F9 B5
F9 B5
F9 B5
F9 B5
F9 B5 △
F9 B5 △
F9 B5 △
F9 B5 △
F9 B5
F9 B5B1051.8
F9 B5B1058.5

```

-----
AttributeError                                Traceback (most recent call last)
Cell In[15], line 62
    57 orbit = row[5].a.string
    58 #print(orbit)
    59
    60 # Customer
    61 # TODO: Append the customer into launch_dict with key `Customer`
--> 62 customer = row[6].a.string
    63 #print(customer)
    64
    65 # Launch outcome
    66 # TODO: Append the launch_outcome into launch_dict with key `Launch outcome`
    67 launch_outcome = list(row[7].strings)[0]

AttributeError: 'NoneType' object has no attribute 'string'

```

```

In [17]: headings = []
for key, values in dict(launch_dict).items():
    if key not in headings:
        headings.append(key)
    if values is None:
        del launch_dict[key]

def pad_dict_list(dict_list, padel):
    lmax = 0
    for lname in dict_list.keys():
        lmax = max(lmax, len(dict_list[lname]))
    for lname in dict_list.keys():
        ll = len(dict_list[lname])
        if ll < lmax:
            dict_list[lname] += [padel] * (lmax - ll)
    return dict_list

pad_dict_list(launch_dict, 0)


df = pd.DataFrame(launch_dict)
df.head()

```

```

Out[17]:
Flight  Launch  Payload  Payload  Orbit  Customer  Launch  Version  Booster  Date
No.      site   mass      mass

```



After you have fill in the parsed launch record values into `launch_dict`, you can create a dataframe from it.

```

In [16]: df= pd.DataFrame({ key:pd.Series(value) for key, value in launch_dict.items() })

```

```

In [18]: # export data to csv
df.to_csv('spacex_web_scraped.csv', index=False)

```

We can now export it to a **CSV** for the next section, but to make the answers consistent and in case you have difficulties finishing this lab.

Following labs will be using a provided dataset to make each lab independent.

```
df.to_csv('spacex_web_scraped.csv', index=False)
```

Authors

[Yan Luo](#)

[Nayef Abou Tayoun](#)

Change Log

Date (YYYY-MM-DD)	Version	Changed By	Change Description
2021-06-09	1.0	Yan Luo	Tasks updates
2020-11-10	1.0	Nayef	Created the initial version

Copyright © 2021 IBM Corporation. All rights reserved.