

Plotting FLR objects with ggplotFL and ggplot2

Iago Mosqueira, EC JRC¹ - FLR Project

December 2013

Using ggplot2 with FLR objects

The ggplot2 package provides a powerful alternative paradigm for creating both simple and complex plots in R using the ideas of Wilkinson's *Grammar of Graphics*²

To facilitate the use of ggplot2 methods in FLR, the ggplotFL package has been created. The main resources on offer in this package are overloaded versions of the ggplot() method that take directly certain FLR classes, a new set of basic plots for some FLR classes, based on ggplot2 instead of lattice, and some examples and documentation on how best make use of ggplot2's powerful paradigm and implementation to obtain high quality plots for even fairly complex data structures.

The overloaded 'ggplot' method

The standard ggplot functions expects a data.frame for its first argument, data. If ggplot is called on an FLR object, a conversion to data.frame takes place before the result, plus any other arguments provided, get passed to the original ggplot(). Conversion makes use of as.data.frame³ methods defined in FLCore, with the cohort argument set to TRUE.

FLQuant

Passing an FLQuant object to ggplot, we can specify the names of the dimensions as variables in the plot, where data refers to the column storing the actual numeric values. For example, to plot data (the catch slot from ple4 in this case) against year, we could use

```
ggplot(data = catch(ple4), aes(year, data)) + geom_point() +  
  geom_line() + ylab("Catch (t)") + xlab("")
```

where we pass directly an FLQuant object for the data argument in ggplot, specify an aesthetic mapping (aes(year, data)), and add both points (geom_point()) and lines (geom_line()), together with the appropriate axis labels.

¹ European Commission
Joint Research Center
IPSC - Maritime Affairs Unit Go4
Ispra, Italy
<https://fishreg.jrc.ec.europa.eu/>

² Wilkinson, L. 1999. *The Grammar of Graphics*, Springer. doi 10.1007/978-3-642-21551-3_13.

³ method?as.data.frame('FLQuant')

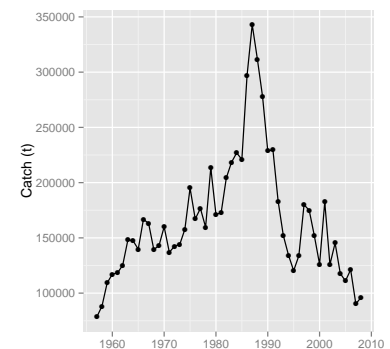


Figure 1: Combined line and point plot of a time series from an FLQuant object.

FLQuants

Similarly, we can pass on to `ggplot` an object of class `FLQuants`, and the conversion to `data.frame` will make use of the corresponding method ⁴. A new column gives the name of each `FLQuant` in the list, called `qname`. When can then use it to, for example, define a call to `facet_wrap()` to obtain a separate subplot per element.

```
ggplot(data = FLQuants(Yield = catch(ple4), SSB = ssb(ple4),
  F = fbar(ple4)), aes(year, data)) + geom_line() +
  facet_wrap(~qname, scales = "free", nrow = 3) +
  labs(x = "", y = "")
```

This procedure is particularly useful when plotting information from objects with multiple `FLQuant` slots, as a subset of slots can be selected for plotting, and even transformations or computations can be carried out in the call to the `FLQuants()` creator.

⁴ `method?as.data.frame('FLQuants')`

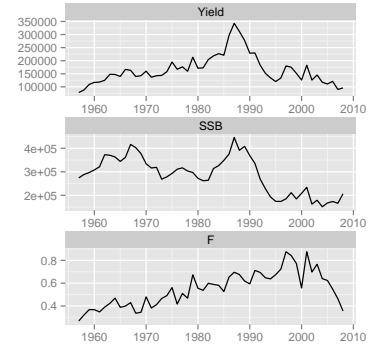


Figure 2: Facet wrap line plot of time series from an `FLQuants` object.

FLStock

A whole `FLStock` object can also be used as argument to `ggplot()`, even if the heterogeneity in scale of the data contained makes the plot slightly confusing. For example, we can plot time series of every `FLQuant` slot in `ple4`, with color applied to different age dimensions, by calling

```
ggplot(data = ple4, aes(year, data)) + geom_line(aes(group = age,
  colour = factor(age))) + facet_wrap(~slot, scales = "free",
  nrow = 3) + labs(x = "", y = "") + theme(legend.position = "none")
```

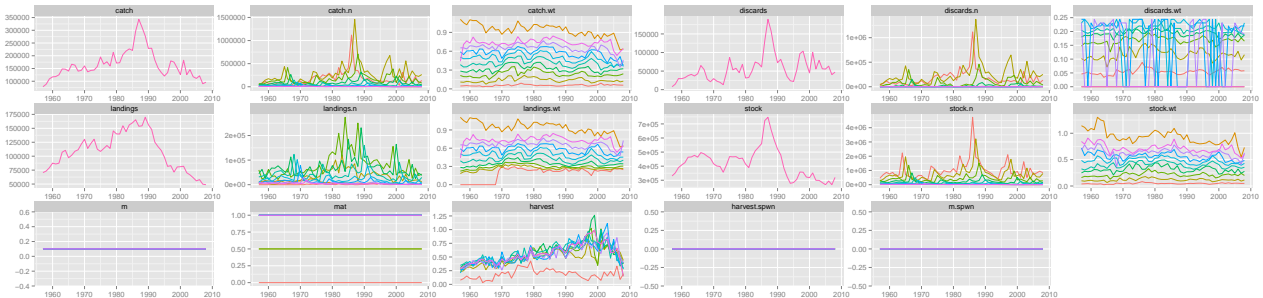


Figure 3: Overall `ggplot` of an `FLStock` object, faceted by slot.

New plot() methods for FLR classes

The `ggplotFL` package also provides new versions of the `plot` method for a number of `FLR` classes. Each `S4` class defined in any `FLR` pack-

age has a `plot()` method available that provides a quick visual summary of the contents of the object.

FLQuant

The standard `plot()` method for `FLQuant` defined in `ggplotFL` uses the faceting capabilities of `ggplot` to better present some of the multiple dimensions of these objects. If any dimension, other than year and iter, has length greater than one, it will be added to the formula used by `facet_grid`. For example, an `FLQuant` with dimensions

```
dim(catch.n(ple4))
```

```
## [1] 10 52 1 1 1 1
```

will generate a plot with a time series by year of the data it contains, with horizontal facets for the only dimension, other than year, of length greater than 1, age.

```
plot(catch.n(ple4))
```

For `FLQuant` objects with iterations, the `plot` method will calculate the 50% (median), 10%, 25%, 75% and 90% quantiles, to be plotted as a line and two coloured ribbons, respectively.

```
plot(rlnorm(200, fbar(ple4), 0.15))
```

FLQuants

The `plot` method for `FLQuants` will now by default show each object in a horizontal panel, with independent scales, by using `facet_grid`. Objects with iterations will have, as with `plot` for `FLQuant`, their median, 10%, 25%, 75% and 90% quantiles shown as a black line and red ribbons with different levels of transparency, respectively.

```
fqs <- FLQuants(F = rlnorm(200, fbar(ple4), 0.15),
               SSB = ssb(ple4), Rec = rec(ple4))
plot(fqs)
```

FLStock

The `ggplotFL` version of the standard plot for the `FLStock` class, contains the time series of recruitment (obtained by calling `rec()`), SSB (`ssb()`), catch (`catch()`), and fishing mortality or harvest (`fbar()`). The four panels are now arranged in a 4-row matrix to better display the trends in the time series.

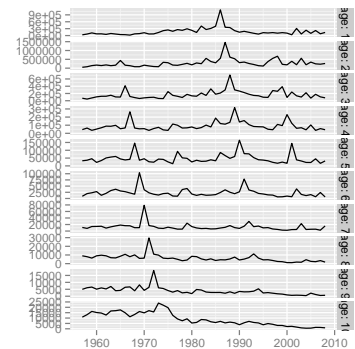


Figure 4: Standard ggplot2-based plot for an `FLQuant` object with multiple years and ages.

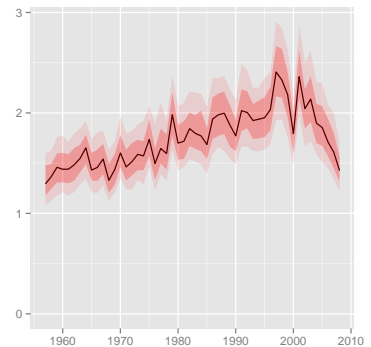


Figure 5: Standard ggplot2-based plot for an `FLQuant` object with multiple iterations.

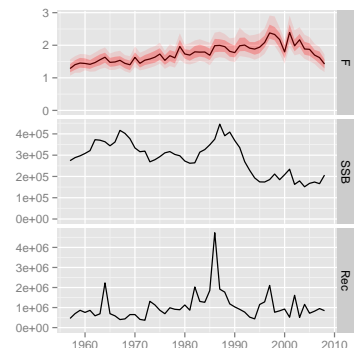


Figure 6: Standard ggplot2-based plot for an `FLQuants` object with multiple iterations, and consisting of three elements.

FLStocks

Similarly, the standard `plot()` method for the `FLStocks` class now relies on `ggplot`. For example, we can create an example `FLStocks` object by splitting the female and male units of `ple4sex` and adding them as separate elements in the list. A call to `plot()` would give us the corresponding plot. Remember the object returned by `ggplot` can always be assigned to a variable in the workspace and modified as required.

Using ggplot2 by converting to data.frame

The methods shown above simply depend on conversion of *FLR* objects into `data.frame`, which can then be passed to `ggplot()`. Calling `ggplot` on an *FLR* object takes care of this conversion behind the scenes, but to obtain certain plots, it is best to directly convert the *FLR* objects into a `data.frame`.

Some examples

Example: plot quantiles of a simulation

To have full control over a plot of the median (or mean) and the confidence or probability intervals of a simulated or randomized time series, i.e. an `FLQuant` object with `iters`, we need to arrange the different values computed from the object in separate columns of a `data.frame`.

If we start with some random `FLQuant` object, such as

```
f1a <- rlnorm(100, FLQuant(exp(cumsum(rnorm(25, 0, 0.1)))), 0.1)
ggplot(f1a, aes(factor(year), data)) + geom_boxplot() + xlab("")
```

we can first compute the necessary statistics on the object itself, as these operations are very efficient on an array. `quantile()` on an `FLQuant` will return the specified quantiles along the `iter` dimension. Let's extract the 10th, 25th, 50th, 75th and 90th quantiles.

```
flq <- quantile(f1a, c(0.10, 0.25, 0.50, 0.75, 0.90))
```

The object can now be coerced to a `data.frame`

```
fdf <- as.data.frame(flq)
```

and inspected to see how the 100 `iters` have been now turned into the five requested quantiles in the `iter` column

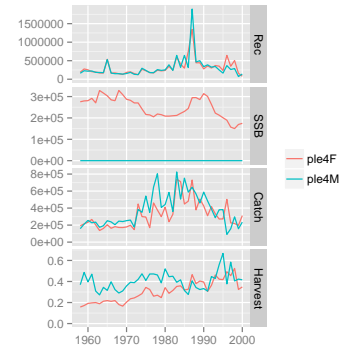


Figure 8: `ggplot2` version of the standard `plot()` for `FLStocks`, as applied to sex separated `ple4sex`

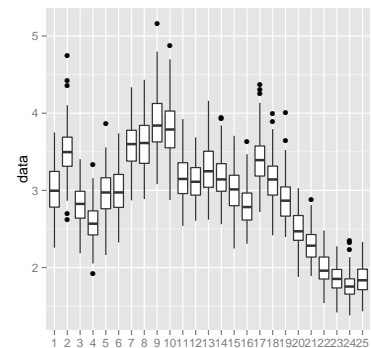


Figure 9: Distribution of values of a simulated time series plotted using `geom_boxplot()`

```
##   quant year   unit season   area iter  data
## 1   all    1 unique    all unique 10% 2.651
## 2   all    2 unique    all unique 10% 3.061
## 3   all    3 unique    all unique 10% 2.526
```

The long format `data.frame` can be reshaped into a wide format one so that we can instruct `ggplot` to use the quantiles, now in separate columns, to provide limits for the shaded areas in `geom_ribbon`. To do this we can use `cast`, as follows

```
fdw <- cast(fdf, quant+year+unit+season+area~iter, value="data")
```

This creates a wide `data.frame` in which the `iter` column is spread into five columns named as the levels of its conversion into factor

```
levels(fdw[, 'iter'])
```

```
## [1] "10%" "25%" "50%" "75%" "90%"
```

We can now use those five quantile columns when plotting shaded areas using `geom_ribbon`. Please note that the column names returned by `quantile()` need to be quoted using backticks.

```
p <- ggplot(data=fdw, aes(x=year, y='50%')) + geom_line() +
  geom_ribbon(aes(x=year, ymin = '10%', ymax = '90%'), fill="red",
  geom_ribbon(aes(x=year, ymin = '25%', ymax = '75%'), fill="red",
  ylab("data")
print(p)
```

Assigning the result of the call to `ggplot()` to a variable, as done above, will allow us to reuse the plot later on by modifying or adding components.

Example: Simulation trajectories plot

If the result of a stochastic simulation is summarised by showing credibility intervals, it is very informative to plot as well some of the individual iterations as a way of showing the fact that individual trajectories are generally not as smooth as, for example, the median shown in the figure above.

```
fds <- as.data.frame(iter(fla, c(1, 4, 23)))
```

```
p + geom_line(data=fds, aes(year, data, colour=iter), size=1) + theme_minimal()
```

This is easy to do in `ggplot2` by adding an extra element on top of the previous plot, stored in the `p` object from the code above.

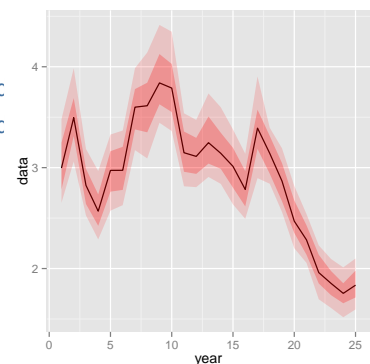


Figure 10: Time series with 75% and 90% credibility intervals plotted using `geom_ribbon`.

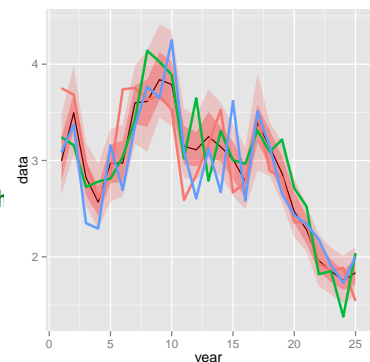


Figure 11: Spaghetti plot of a stochastic simulation, by calling `geom_line` on top of the stored ribbon plot.

Example: Using FLQuants

Coercion using `as.data.frame`, combined with the use of `cast` and `melt` (from the `reshape` package), provides the *FLR* user with the tools required to create a large range of `ggplots` out of any *FLR* object.

TODO: ADD text

Example: Bubble plots

Bubble plots allow us to represent a third continuous dimension in a scatter plot by sizing points according the value of a variable. For example, catch in numbers by age and year can be visualized using

```
ggplot(catch.n(ple4), aes(year, as.factor(age), size=data)) + geom
```

where *data* is used to size the bubbles in the call to `aes()`.

Example: Residual plots

TODO: ADD text

```
dat <- as.data.frame(catch.n(ple4))
dat$resid <- dat$data - mean(dat$data)
```

```
ggplot(dat, aes(year, as.factor(age), size=resid)) +
  geom_point(shape=21, aes(colour=factor(sign(resid)), fill=fact
  scale_size(range = c(1, 20)) +
  scale_colour_manual(values=c("black", "white")) +
  scale_fill_manual(values=c("lightgray", "black")) +
  theme(legend.position = "none") + ylab("age")
```

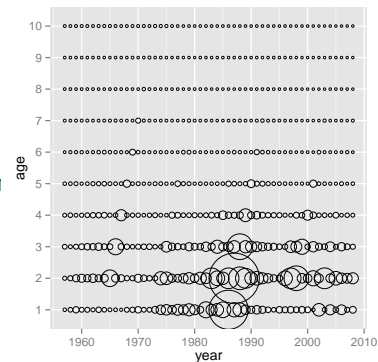


Figure 12: Bubble plot of catch by age in numbers for North Sea plaice.

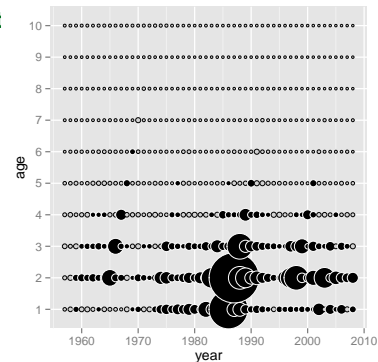


Figure 13:

More information

- You can submit bug reports, questions or suggestions on `ggplotFL` at the `ggplotFL` issue page ⁵, or on the *FLR* mailing list.
- Or send a pull request to <https://github.com/flr/ggplotFL/>
- For more information on the *FLR* Project for Quantitative Fisheries Science in R, visit the *FLR* webpage ⁶.

⁵ <https://github.com/flr/ggplotFL/issues>

⁶ <http://flr-project.org>

- To learn more about ggplot2, visit the ggplot2 website ⁷, or look at the ggplot2 book.⁸
- The latest version of ggplotFL can always be installed using the devtools package, by calling

⁷ <http://ggplot2.org/>

⁸ Wickham, H. 2009. *ggplot2: Elegant Graphics for Data Analysis*. Springer, Use R! Series. doi:10.1111/j.1467-985X.2010.00676_9.x

```
library(devtools)
install_github('ggplotFL', 'flr')
```

Software Versions

- R version 3.0.2 (2013-09-25)
- ggplotFL: 2.5.20131206
- FLCore: 2.5.20140123
- ggplot2: 0.9.3.1
- **Compiled:** Fri Jan 24 15:50:51 2014
- **Git Hash:** 7751c9e

knitr options

```
opts_chunk$set(dev='pdf', cache=TRUE, fig.width=4.5, fig.height=4.5)
```