


Encapsulates a request as an object, thereby letting you parameterize clients with different requests, queue or log requests, and support undoable operations.

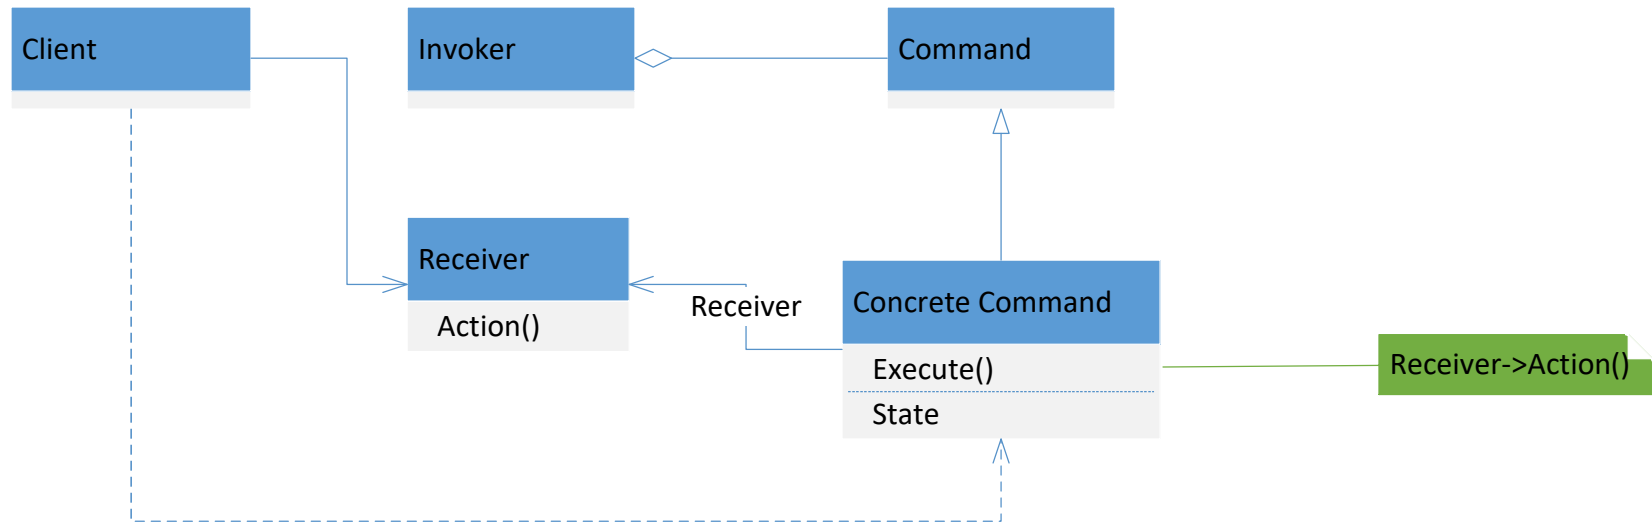

Command declares an interface for executing an operation. ConcreteCommand defines a binding between a Receiver object and an action. Client creates a Command object and sets its receiver. Invoker asks the command to carry out the request.