Quantative modelling of read counts better discriminates three p
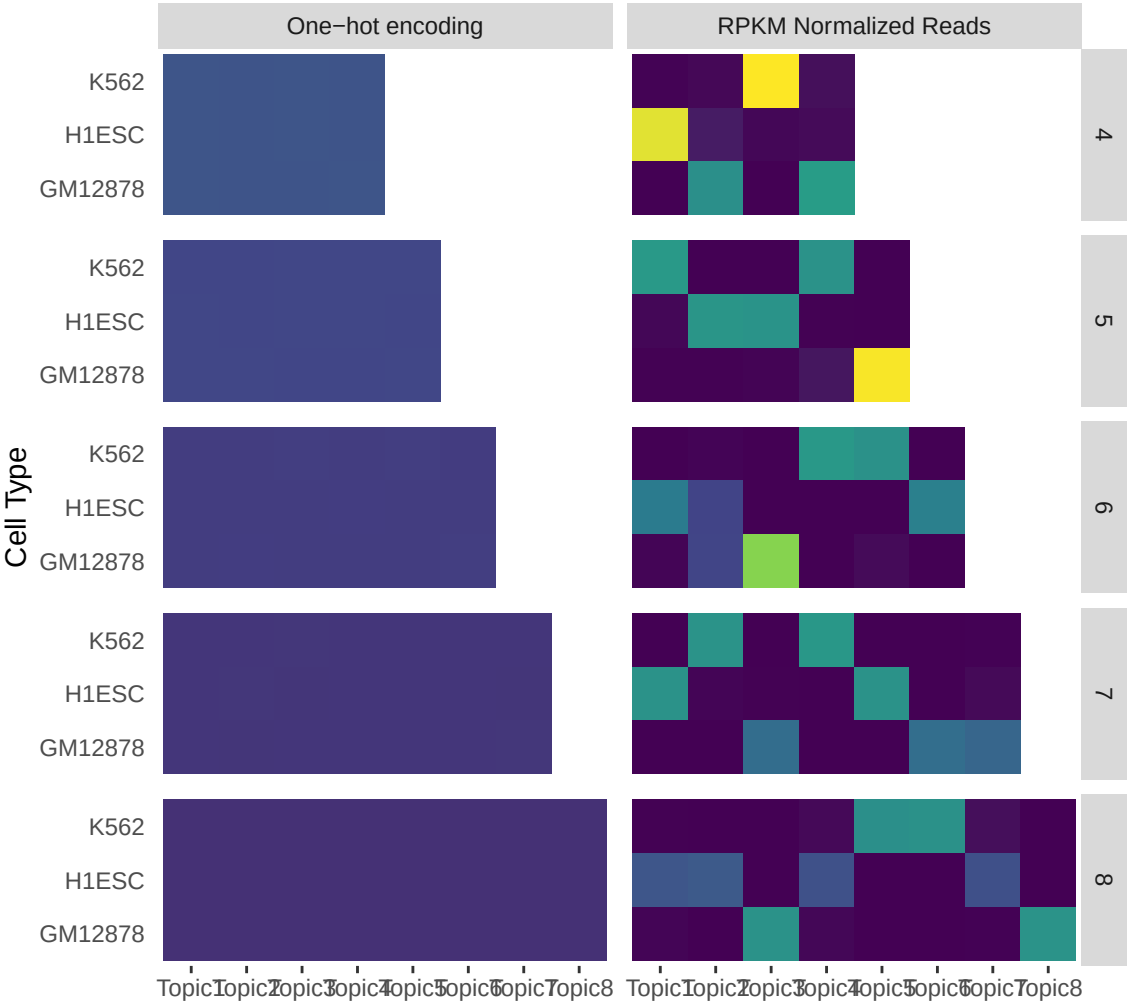
Hyper−parameters proposed by Bayesian optimization; loadings normalised