

ANIEZE
PARIS

FOLD-PAINT SPLIT SET · LEATHER

REVISION B · 12 NOV 2026 · REPLACES ALL EARLIER COPIES

Rev B · 12 Nov 2026 · Trouser in LAMB suede only, thinner and softer (0.6–0.7 mm, was goat or lamb 0.7–0.9); weight recalculated. All hardware GUNMETAL, nickel-free (was silver-tone or gunmetal). Knee join confirmed.

Rev A · 12 Nov 2026 · First issue of the LEATHER variant, built from the wool pack Rev B: indigo lambskin overshirt (4 wide pleats per half, 16 in all, edge-stitched full length) + stone suede trouser (knee join, edge-stitched pleats, full cupro lining); hand-applied patina routes A/B; skin plans; leather tests.

colourway 1 · Indigo lambskin / Stone suede · Rust + Caramel patina

The leather version of the set. A boxy overshirt in soft indigo lambskin whose lower half is a separate panel of 16 wide knife pleats (4 per front and back half), edge-stitched along every fold; a wide, high-rise trouser in thin, very soft stone lamb suede, fully lined to the knee, with two edge-stitched front pleats per leg, a knee join and a hem that pools on the floor. A hand-applied rust and caramel patina starts on the shirt's pleats and runs on across the trouser's front pleats and back thighs, fading out by the knee. Each piece stays ≈ 80 % its own base colour; every set is unique.

Styles	P07-FP01L overshirt · P07-FP02L trouser · leather variant of P07-FP01 / FP02 · cw1
Sizes	Unisex XS–2XL, base M (chest 108.1 / waist 101.8 / hip 106.9, 174 cm)
FP01L	lambskin 0.7–0.8 mm, indigo (hand-coloured patina) · 16 knife pleats, edge-stitched · 8 snaps · buy ≈ 6 skins ≈ 39 sq ft (M)
FP02L	warm stone lamb suede 0.6–0.7 mm · 2 pleats per leg, edge-stitched 12 cm · knee join · fully lined to the knee · buy ≈ 8 skins ≈ 52 sq ft (M)
Colour	FP01L: route A, rust + caramel dyes on crust lambskin, masked, indigo airbrushed around them, matte flexible top coat (route B: indigo crust + thin pigment) · FP02L: suede dyes airbrushed into the nap + repellent · both pieces coloured together on one template
Hardware	Metal, nickel-free: snaps, #5 zip, hook + bar, inside button · GUNMETAL, one finish lot per set
Weight	FP01 ≈ 1.25 kg · FP02 ≈ 1.18 kg at M (estimates)
Origin	Designed in Paris

P0 spec for the first proto panels and toile. Measurements are designer estimates until the fitting; the colour route is to be validated on leather strike-offs.



The design image shows the look; the drawings and tables rule. 16 wide pleats (4 per half), face 6.75 cm. Pleat seam: the design image places it at the upper abdomen, ≈ 46 % of the shirt length → PS = 33 cm below HPS at M (≈ 10 cm above the natural waist).


Colour	Role	Target description	Nearest Pantone TCX	Alternative
Deep indigo	FP01L base (lambskin 0.7–0.8 mm)	Deep indigo / dark navy, slight red-violet cast, mid-dark (target L* ≈ 22–26); route A: airbrushed penetrating leather dye on crust · route B: drum-dyed through at the tannery	**19-3953 TCX Sodalite Blue** *(nearest)*	19-4027 TCX Estate Blue
Warm stone	FP02L base (lamb suede 0.6–0.7 mm)	Warm light stone / greige-beige with a yellow cast (target L* ≈ 72–76), drum-dyed through, even, no grey-green; suede reads ≈ 1 step darker than smooth leather	**14-1112 TCX Pebble** *(nearest)*	15-1116 TCX Safari
Rust	colour, cores of each shape	Deep warm red-orange brown like oxidised iron; the darker of the two paint colours	**18-1248 TCX Rust** *(nearest)*	18-1340 TCX Potter's Clay
Caramel	colour, halos and feathered edges	Golden tan-orange, lighter and yellower than rust; feathers out into the base	**16-1439 TCX Caramel** *(nearest)*	16-1342 TCX Buckskin

All Pantone references are NEAREST matches only: confirm on leather strike-offs. FP01L rust + caramel are penetrating leather dyes on CRUST lambskin (route A) or thin flexible pigment layers on indigo crust (route B), under a matte top coat; FP02L rust + caramel are suede dyes airbrushed into the nap. Smooth leather and suede never look identical: match the overshirt and trouser colours to the same standards within grey scale 4 (ISO 105-A02), D65 + TL84, approved side by side.

Other colourways: not developed for leather yet. A dark option (black lambskin / charcoal suede) is the first to strike off.


AS WORN · FRONT

overshirt over the trouser · trouser waist 44 cm below HPS · shirt hem = H

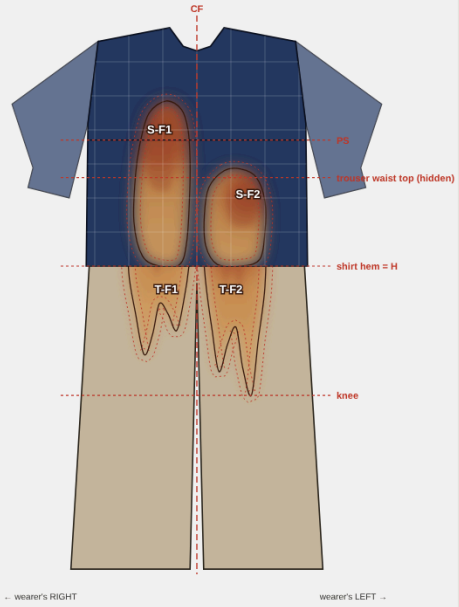


LAID FLAT ON THE TEMPLATE · FRONT

front paint units: shirt (x from CF, y from PS) · trouser legs (y from the waistband top)

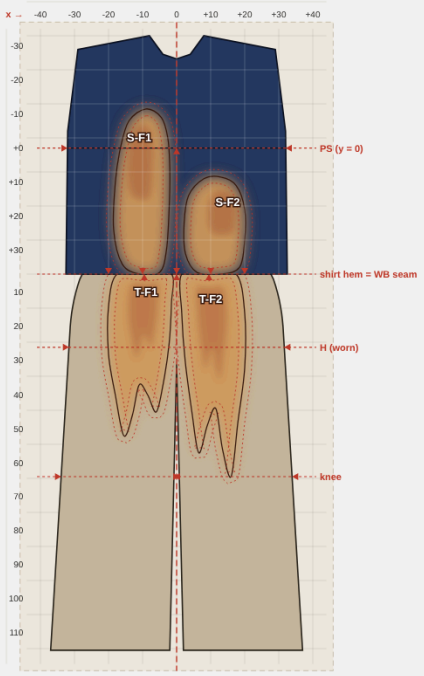


AS WORN · BACK

seen from behind: the wearer's RIGHT is on the image right

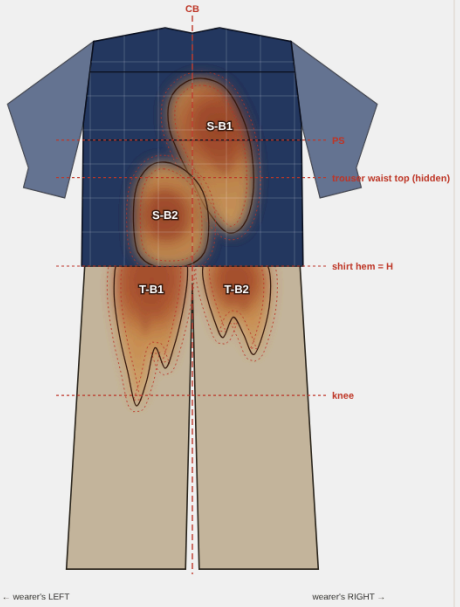

LAID FLAT ON THE TEMPLATE · BACK

back paint units: back body below the yoke + pleats · back legs

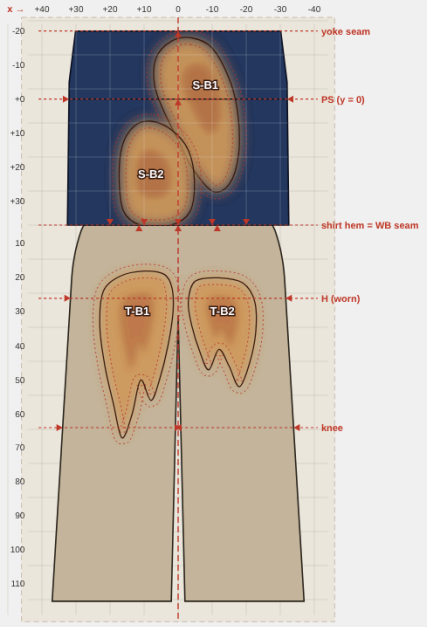

—— shape outline at M (curve through the template points, table P-1) ····· ±2 cm envelope: every piece unique inside it ▲ registration notch (3 mm, in the allowance) = template pin point – – – CF / CB · grid 10 cm · x + = wearer's LEFT

Rust cores, caramel halos, edges feathered 3–6 cm, NO splatter. Pleats basted shut while painting (faces painted, underlays stay base colour). Plackets, yoke, sleeves, collar, waistband, loops: never painted.

Template: shirt unit above, trouser legs below, the shirt hem touching the trouser waistband seam (laid flat). As worn the shirt hem falls at H = 26 cm below the trouser waistband top: the streaks run on across it. Other sizes: scale per table P-2.

Shape	Where	y ref	Outline points at M: (x cm from CF/CB, + = wearer's LEFT ; y cm below the reference) · tolerance ±2 cm	Rust core	cm²
S-F1	Overshirt front · wearer's RIGHT of CF · from ≈ 11 cm above the pleat seam (spills onto the upper front) down to the hem	PS	(-9, -11.5) · (-4.5, -9) · (-2.6, -3) · (-2, 6) · (-2.2, 18) · (-3, 30) · (-5, 36.5) · (-11, 37) · (-16, 34) · (-18.5, 24) · (-18, 10) · (-16.5, 0) · (-14, -8)	(-11, -3)	683
S-F2	Overshirt front · wearer's LEFT of CF · from ≈ 9 cm below the pleat seam to the hem	PS	(8, 9) · (13, 8.5) · (17.5, 11) · (20, 18) · (20, 27) · (18.5, 35) · (13, 37) · (6, 36.5) · (2.6, 31) · (2.2, 22) · (3.5, 14)	(15, 16)	450
S-B1	Overshirt back · upper lobe · from 2 cm below the yoke seam across the wearer's RIGHT back, onto the pleats	PS	(-4, -18) · (2, -17) · (6.5, -12) · (6.9, -4) · (4, 4) · (0, 12) · (-4, 20) · (-10, 27) · (-15, 25) · (-17.8, 16) · (-17.5, 4) · (-15, -6) · (-10, -15)	(-8, -4)	779
S-B2	Overshirt back · lower lobe (joins the upper lobe) · wearer's LEFT of CB, on the pleats down to the hem	PS	(8, 6.5) · (13, 8) · (16.5, 14) · (17.3, 24) · (16, 33) · (11, 37) · (2, 37) · (-3.5, 33) · (-4.8, 24) · (-3, 15) · (2, 9)	(8, 22)	571
T-F1	Trouser front · wearer's RIGHT leg · over both pleats from the waistband seam, fading out at mid-thigh (≈ 52 cm)	WB top	(-1.5, 4.5) · (-9, 4.5) · (-17.5, 4.5) · (-20, 14) · (-20, 28) · (-18, 40) · (-15.5, 52) · (-13, 46) · (-11, 37) · (-8.5, 40) · (-6, 45) · (-4, 37) · (-2.2, 25) · (-1.5, 13)	(-9, 10)	671
T-F2	Trouser front · wearer's LEFT leg · over both pleats from the waistband seam, fading out at the knee (≈ 64 cm)	WB top	(1.5, 4.5) · (9, 4.5) · (17.5, 4.5) · (20, 16) · (20, 32) · (18, 48) · (16, 64) · (13.5, 56) · (11.5, 44) · (9, 49) · (6.5, 57) · (4.5, 45) · (2.5, 30) · (1.5, 16)	(10, 12)	823
T-B1	Trouser back · wearer's LEFT thigh · from ≈ 5 cm below the back pocket, fading out just above the knee (≈ 67 cm)	WB top	(4, 19) · (10, 18) · (17, 19.5) · (22, 24) · (23, 34) · (21.5, 46) · (19, 57) · (16.5, 67) · (13.5, 60) · (11, 50) · (8, 56) · (5.5, 50) · (3, 40) · (1.5, 30) · (1.8, 23)	(12, 30)	715
T-B2	Trouser back · wearer's RIGHT thigh · from ≈ 7 cm below the back pocket, fading out at mid-thigh (≈ 52 cm)	WB top	(-5, 21) · (-12, 20) · (-19, 21.5) · (-22.5, 27) · (-22.8, 36) · (-21, 45) · (-18, 52) · (-15, 46) · (-12, 41) · (-9, 47) · (-6.5, 42) · (-4, 34) · (-3, 27)	(-13, 30)	452


Size	shirt x	shirt y ↓PS	shirt y ↑PS	trouser x	trouser y
XS	0.938	0.989	0.952	0.923	0.971
S	0.969	0.995	0.976	0.962	0.986
M	1.000	1.000	1.000	1.000	1.000
L	1.031	1.005	1.024	1.038	1.014
XL	1.062	1.011	1.048	1.077	1.029
2XL	1.109	1.024	1.079	1.135	1.047

1. Each garment stays ≈ 80 % base colour: paint covers ≤ 25 % of the visible garment (QA checks it from these outlines).
2. Rust sits in the core of each shape (upper part), caramel around it; rust : caramel ≈ 40 : 60 by area. Edges feather out over 3–6 cm into the base. NO splatter, no drips, no hard edges (the dots in the flat-lay design image are an artefact).
3. Tolerance: every outline ±2 cm (the template shows the inner and outer envelope). Inside the envelope every piece is unique: brush marks, feathering and the rust / caramel balance vary by hand.
4. Colour is applied with the pleats folded and CLIPPED / TAPED SHUT: only the pleat faces take rust + caramel; the underlays stay base colour (indigo on the overshirt, stone on the trouser), so the base flashes between coloured faces when the pleats move (the 'fold' of fold-paint).
5. Plain (never coloured): overshirt plackets, collar, stand, yoke, sleeves, cuffs; trouser waistband, belt loops, fly shield, pocket facings and bags. Colour stays ≥ 1.5 cm inside the slant pocket edge, ≥ 1 cm from the trouser CF and ≥ 5 cm below the back pocket jets.
6. Other sizes: one template per size, scaled from M (table below). Overshirt: x × B/B(M), y below the pleat seam × PL/PL(M), y above it × PS/PS(M). Trouser: x × W/W(M), y × (OS − WBH)/(OS − WBH)(M).

HOW THE COLOUR IS DONE · leather route A (to be validated on strike-offs)

FP01L lambskin: rust + caramel on pale CRUST, masked, then the indigo base airbrushed around them, matte top coat · FP02L stone suede: suede dyes into the nap · both pieces coloured together on one template

1 STRIKE-OFFS + TESTS




lambskin + caramel (route A) · lambskin + rust (route A) · suede + caramel (suede dye) · suede + rust (suede dye)

→ ISO 11640 · 5402-1 · 105-B02 · 17075 · strike-off per leather

Approve route A on crust lambskin and the suede route on stone suede (one strike-off each, the full route) and the tests: ISO 11640, 5402-1, 105-B02, 17075. Nothing is cut before approval.

2 INSPECT, CUT + NOTCH



light table · flaws marked · crust lambskin + stone suede · 3 mm notches

Skins on the light table; flaws marked with silver pen on the flesh side. Cut single-ply: overshirt in pale CRUST lambskin, trouser in stone suede, nap down. 3 mm notches in the allowances; set number on every piece.


3 CREASE + CLOSE THE PLEATS



crease → fold → low-tack tape on the reverse (shirt) · clips in the allowance (trouser)


Overshirt: mark each fold with a creasing iron (≤ 80 °C) or bone folder on the flesh side, fold the 16 knife pleats, hold them shut with low-tack tape on the reverse. Trouser: fold the 2 front pleats per leg and clip them in the allowance.

4 BUILD UNITS + LAY UP

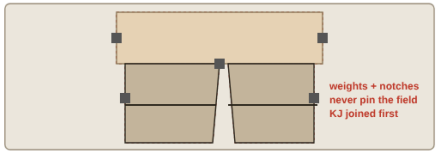

Overshirt: upper front + pleated front, back body + pleated back, glued and stitched at the pleat seam. Trouser: upper + lower leg panels joined at KJ. Lay them on the 1:1 template on the spray table, shirt above, trouser below, notches matched.

5 MIX THE COLOURS




rust · caramel · indigo — rust · caramel

thinned for the airbrush · batch written on the set card

Lambskin: penetrating leather dyes (water- or alcohol-based) in rust, caramel and indigo, one maker. Suede: suede dyes in rust + caramel. Thin versions for the airbrush. Mix per set and write the batch on the set card.


6 RUST CORES



inside the inner envelope · one gesture across both pieces

Airbrush (and brush where needed) the rust cores inside the inner envelope, following the template at ±2 cm, on the closed pleat faces. Work across the shirt hem onto the trouser in one gesture so the shapes run on.


7 CARAMEL + FEATHER



feather 3–6 cm · NO splatter · ≈ 80 % base colour · trouser done

Caramel around the cores, then feather every edge over 3–6 cm with thin airbrush passes. No splatter, no drips. Check ≈ 80 % base colour per piece. Every piece is unique inside the envelope. The trouser colour is done here.


8 MASK THE SHAPES (LAMBSKIN)



lambskin only · low-tack film or liquid frisket

Cover each rust core and the inner caramel with low-tack masking film or liquid frisket, ≈ 3 cm inside the shape outline; leave the outer feather band OPEN. Cut the film along every pleat fold.


9 INDIGO BASE (LAMBSKIN)



opened flat · indigo over all, underlays too · thin cross passes · L* 22–26

Remove the tape and open the panels flat. Airbrush the indigo dye over the whole panel, underlays included, in thin cross passes to L* 22–26. Over the open feather band the indigo fades into the caramel: the soft edge. Remove the mask.

10 FIX + FINISH



dry flat · coloured faces never touch

Lambskin: 2 light coats of flexible water-based MATTE top coat (no gloss, no stiffness), dry flat. Suede: fix per the dye maker, brush the nap, then a fluorine-free water + stain repellent. Coloured faces never touch while drying.


11 RE-FOLD + EDGE-STITCH



edge-stitch 1.5 mm · full length (shirt) · 12 cm (trouser) · no steam

Re-fold on the creases, glue-baste the folds lightly, edge-stitch 1.5 mm from each fold: the overshirt pleats full length, the trouser pleats for 12 cm below the waistband seam. No steam, no hot press on leather.

12 QC + TAG



check envelope + colour · tag · photograph · then sew

Check each piece against the template envelope and the colour standards; rub spot-test on a hidden allowance; tag the set number, photograph it, then make the garments.

Route B (if route A fails on the strike-offs): the overshirt is cut from indigo crust lambskin drum-dyed at the tannery; rust + caramel are built up in thin layers of FLEXIBLE opaque leather pigment by airbrush (rust cores, caramel halos, feathered edges), then the same matte top coat. Simpler (no mask), but the coloured areas feel slightly more surface-coated. The trouser route does not change.

Every outline: ±2 cm from the template (paint map). Shapes, colours and tests: see the paint map, the colour standards and the test plan. Route A uses dyes only (the hand stays soft); route B uses thin flexible pigment.

Registration marks (notches) + template

Overshirt front unit	3 mm notches in the hem allowance at CF and at x = ±10 / ±20 cm; notch at CF and at each side seam on the pleat seam (PS); thread-trace CF
Overshirt back unit	notches in the hem allowance at CB and x = ±10 / ±20 cm; CB notch on the pleat seam and on the yoke edge; thread-trace CB
Trouser front legs	notch at CF and on the pleat-1 fold (crease line) at the waistband seam; notches on the side seam and inseam at H (shirt hem as worn, 26 cm below the waistband top at M) and at the knee (64 cm)
Trouser back legs	notch at CB and at the back pocket centre on the waistband seam; side seam + inseam notches at H and at the knee
Template	1:1 sheet per size (Mylar) on the spray table: outlines of every shape with the ±2 cm envelope dashed, CF / CB lines, pleat seam, H and knee lines, and pin points that match every notch. Pieces are held with small weights and positioned through the notches; never pin leather in the visible field (holes stay).

Route B


Route B (if route A fails on the strike-offs): the overshirt is cut from indigo crust lambskin drum-dyed at the tannery; rust + caramel are built up in thin layers of FLEXIBLE opaque leather pigment by airbrush (rust cores, caramel halos, feathered edges), then the same matte top coat. Simpler (no mask), but the coloured areas feel slightly more surface-coated. The trouser route does not change.

Leather tests (targets, before cutting bulk)

Strike-offs	Both routes (A crust + mask + indigo, B indigo crust + pigment) on 40 × 40 cm pleated lambskin, and the suede route on stone suede: shade, feathering, hand, nap, the pleat folds. Choose the route on these.
Rub fastness (Veslic)	ISO 11640 on the coloured zones. Lambskin (top-coated): dry 150 cycles ≥ 4, wet 50 cycles ≥ 3. Suede: dry 50 cycles ≥ 3–4, wet 20 cycles ≥ 3 (grey scale for staining).
Flex resistance	ISO 5402-1 (flexometer) on the coloured + top-coated lambskin: 20 000 cycles dry with no cracking, flaking or colour loss; also at the pleat fold.
Light fastness	ISO 105-B02 (xenon arc): ≥ 4 on lambskin (indigo, rust, caramel), ≥ 3–4 on the suede.
Finish adhesion + perspiration	ISO 11644 finish adhesion ≥ 2 N/10 mm on lambskin; ISO 11641 perspiration ≥ 3 (colour transfer to the lining and skin).
Colour match + chemistry	D65 + TL84, grey scale 4 against the standards, overshirt and trouser side by side. Chromium VI ISO 17075 not detected (< 3 mg/kg); REACH; EN 1811 on the hardware.


FRONT

indigo lambskin · 6 front snaps (stand + 5) · pleat seam PS · 4 knife pleats each side, folds toward the side seams

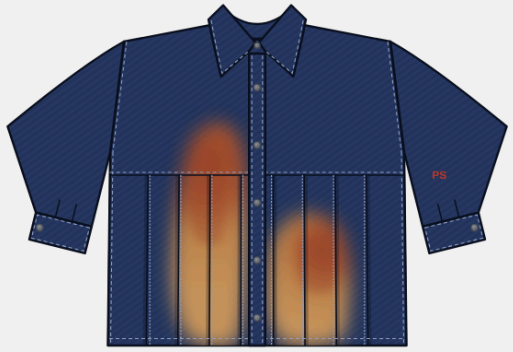


BACK

yoke · 4 + 4 knife pleats turning away from CB · colour from below the yoke onto the pleats

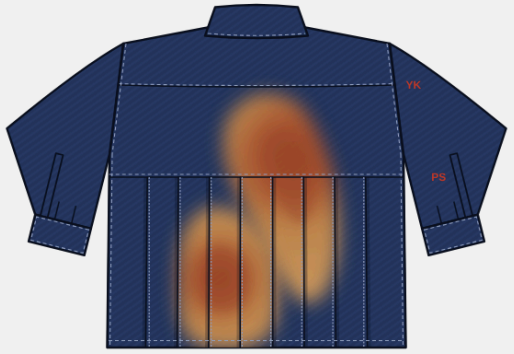

LEFT SIDE

dropped shoulder · snap cuff · pleats turn toward the side seam front and back

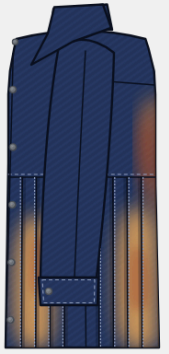

Indigo = lambskin · rust / caramel = hand-applied patina, feathered edges, see the paint map · dashes = 6 mm topstitch · dashes beside each fold = full-length edge-stitch · dark grey = gunmetal nickel-free snaps


Knife pleats all round the lower half: 4 per front half and 4 per back half = 16 pleats. Face PF ≈ 6.75 cm, depth PD 3 cm (intake 6 cm per pleat, 96 cm in all at M, so the panel is cut ≈ 224 cm round before pleating). Every fold turns TOWARD THE NEAREST SIDE SEAM: on the wearer's LEFT of CF the folds face the wearer's left side seam, on the wearer's RIGHT of CF they face the right side seam; the same on the back, so CB reads as a flat 7 cm panel between two pleats turning away from it (an inverted box look). First fold P0 = 3.5 cm from CF / CB, last fold ≈ 1.5 cm before the side seam. LEATHER: every fold is edge-stitched (1.5 mm from the fold) along its FULL length (PE = PL); lambskin takes no permanent pressed pleat, the stitch keeps the fold crisp. PD < PF, so the underlays do not overlap: ≈ 1.9 layers under one point of the pleat seam at M (wool version: 5). Allowances skived, glued and topstitched, no binding.

A · KNIFE PLEATS + EDGE-STITCH

16 pleats, folds toward the side seams both sides of CF / CB · face 6.75 · depth 3 · edge-stitched 37 cm


indigo lambskin 0.7–0.8 mm · leather fusible · cupro lining · stitching

① section through the pleat seam level (seen from below, schematic: layers spread apart)

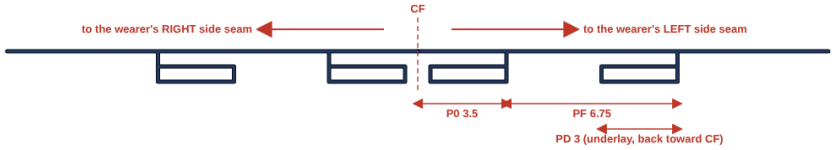

Fold edges point to the nearest side seam on both sides of CF (and of CB). Face ≈ 6.75 cm, depth 3 cm → intake 6 cm per pleat, 96 cm in all;
the underlays do not overlap (PD < PF): ≈ 1.89 layers under the seam. Panel cut ≈ 224 cm round (4 quarter pieces, joins hidden in a pleat inner fold / in the side seam).


② plan at the pleat seam (wearer's left front, 4 pleats) · edge-stitched the full 37 cm



B · PLEAT SEAM

Level all round at PS = 33 cm below HPS · skived, glued up · topstitched 6 mm · placket crosses it


indigo lambskin 0.7–0.8 mm · leather fusible · cupro lining · stitching

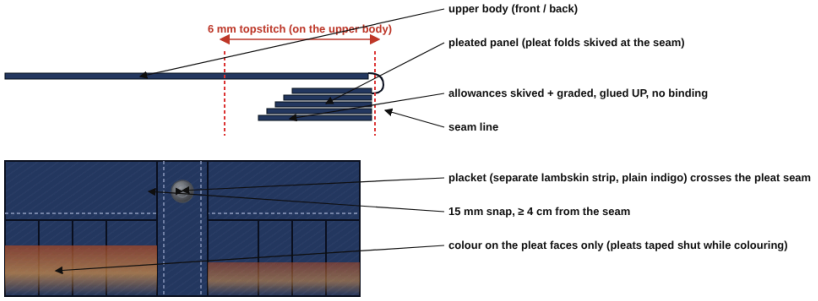

C · COLLAR + STAND

Point collar on a stand · interfaced · stand snap

indigo lambskin 0.7–0.8 mm · leather fusible · cupro lining · stitching

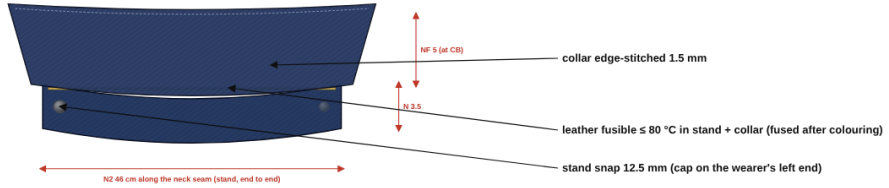


Point collar on a stand: collar point NP 7.5 cm, stand 3.5 cm at CB. Upper + under collar in lambskin, allowances skived, both interfaced; stand + collar edge-stitched 1.5 mm. Never coloured.

D · SNAP SET (ring-spring, nickel-free)

Cap + socket on the top placket · stud + post on the under placket

indigo lambskin 0.7–0.8 mm · leather fusible · cupro lining · stitching

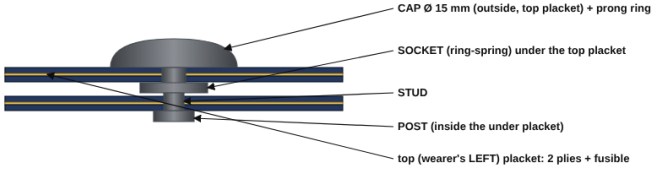




8 sets: stand 1 (12.5 mm), placket 5 (15 mm) at S1 = 14 cm below HPS then every SN = 12.5 cm, cuffs 2 (15 mm). Set AFTER colouring,
top coat and sewing, through 2–3 plies of lambskin + fusible; leather-length post (2–4 mm). Leather patch + fusible behind every snap.
Nickel-free; open / close force 15–30 N; pull ≥ 90 N.

E · CUFF + SLEEVE PLACKET

Two-piece 6 cm lambskin cuff · 1 snap · tower placket · 2 pleats

indigo lambskin 0.7–0.8 mm · leather fusible · cupro lining · stitching

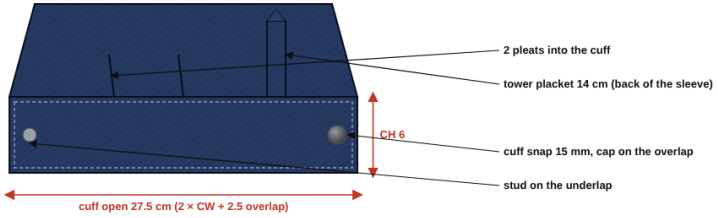


Two-piece lambskin cuff, edges turned and glued, leather fusible on the outer, edge-stitched 1.5 mm all round. CW = 12.5 cm closed (cuff − wrist ≈ 8 cm, an overshirt cuff).

F · SEAMS, YOKE, HEM


Glued open + topstitched · lambskin / cupro yoke · hem turned 2 cm before pleating

indigo lambskin 0.7–0.8 mm · leather fusible · cupro lining · stitching


① plain seam, glued open, topstitched (armhole, side, sleeve)



② yoke: lambskin outer + cupro inner




③ pleated-panel hem




Upper body + sleeves half-lined in cupro (covers the glued seams); the pleated lower half is unlined. Skin joins hidden in a pleat under-fold. No steam, cool press through paper only.

FRONT · points of measure (M)

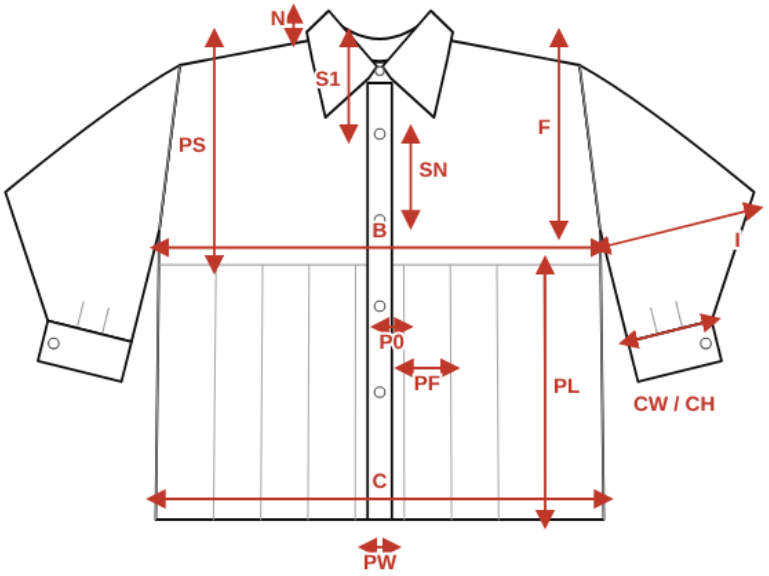

BACK

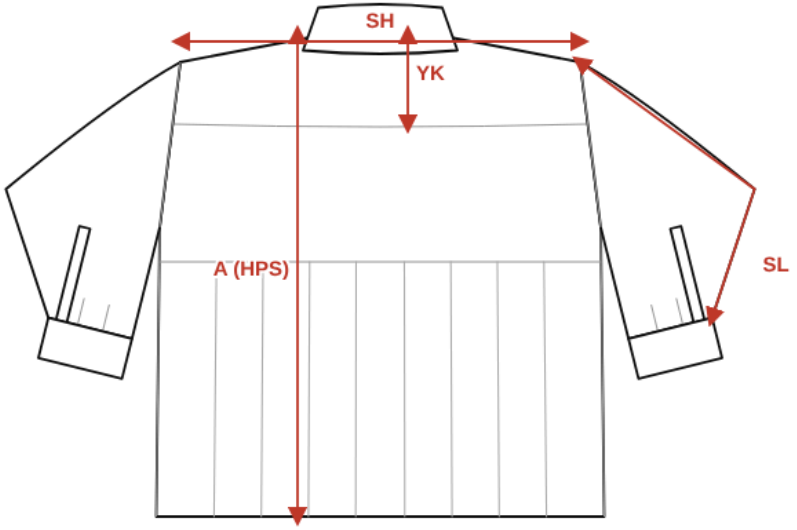


Snaps (M)	Size	Qty	Note
Collar stand (closes the neck)	12.5 mm cap	1	cap + socket on the wearer's LEFT stand end, stud + post on the right
Front placket, wearer's LEFT over right	15 mm cap	5	S1 below HPS, then every SN; cap + socket on the top (left) placket, stud + post on the under (right) placket
Cuff (one per sleeve)	15 mm cap	2	cap on the cuff overlap, stud on the underlap
Total 8	placket snaps at 14 · 26.5 · 39 · 51.5 · 64 cm below HPS · pleat folds at ±(P0 + k·PF) = ±3.5, ±10.25 … ±23.75 cm from CF / CB		

Code	Point of measure	How to measure	Tol	Grade	XL→2XL	XS	S	M	L	XL	2XL
A	Back length from HPS	High point shoulder (neck seam at the shoulder line) straight down to the hem edge at CB, laid flat, pleats closed	±1	1	1.5	68	69	70	71	72	73.5
B	1/2 chest	Laid flat, snaps closed, side to side 2.5 cm below the underarm point	±1.5	2	3	60	62	64	66	68	71
C	1/2 hem sweep, pleats closed	Laid flat, snaps closed, pleats lying shut, straight across the hem edge	±2	2	3	61	63	65	67	69	72
CC	Hem circumference, pleats closed	Snaps closed, pleats lying shut, all the way round the hem edge (= 2 × C)	±3	4	6	122	126	130	134	138	144
SH	Shoulder width (dropped)	Shoulder point to shoulder point (armhole seam at the shoulder line), straight across the back	±1	1.5	2	55	56.5	58	59.5	61	63
F	Armhole depth from HPS	HPS straight down to the underarm point (armhole seam meets side seam)	±1	1	1.2	26	27	28	29	30	31.2
SL	Sleeve length from shoulder point	Shoulder point along the top of the sleeve to the cuff edge, cuff included	±1	1	1	55	56	57	58	59	60
I	1/2 bicep	Laid flat, 2.5 cm below the underarm point, perpendicular to the sleeve centre	±1	0.8	1	21.4	22.2	23	23.8	24.6	25.6
CW	Cuff, closed, laid flat	Edge to edge across the closed cuff (snap done up) = 1/2 cuff circumference	±0.5	0.4	0.5	11.7	12.1	12.5	12.9	13.3	13.8
CH	Cuff height	Cuff seam to the cuff edge	±0.3	0	0	6	6	6	6	6	6
N2	Collar stand length at neck seam	Along the neck seam of the stand, end to end (incl. the placket extension)	±1	1.2	1.5	43.6	44.8	46	47.2	48.4	49.9
N	Collar stand height at CB	Neck seam to the stand/collar seam at CB	±0.2	0	0	3.5	3.5	3.5	3.5	3.5	3.5
NF	Collar height at CB	Stand/collar seam to the collar edge at CB	±0.3	0	0	5	5	5	5	5	5
NP	Collar point length	Stand/collar seam to the collar point, along the collar end edge	±0.5	0	0.3	7.5	7.5	7.5	7.5	7.5	7.8
PW	Front placket width	Edge to edge across the finished placket (centred on CF)	±0.2	0	0	3.5	3.5	3.5	3.5	3.5	3.5
S1	First placket snap below HPS	HPS straight down to the centre of placket snap 1 (the stand snap is extra, centred on the stand)	±0.5	0.3	0.3	13.4	13.7	14	14.3	14.6	14.9
SN	Placket snap spacing	Centre to centre, 5 placket snaps	±0.5	0.25	0.3	12	12.25	12.5	12.75	13	13.3
YK	Back yoke depth at CB	HPS level straight down CB to the yoke seam	±0.5	0.4	0.5	12.2	12.6	13	13.4	13.8	14.3
PS	Pleat seam from HPS	HPS straight down to the horizontal pleat seam (level front, side and back)	±1	0.8	1	31.4	32.2	33	33.8	34.6	35.6
PL	Pleated panel length	Pleat seam straight down to the hem edge at CF and CB (A = PS + PL)	±1	0.2	0.5	36.6	36.8	37	37.2	37.4	37.9
P0	First pleat fold from CF / CB	Along the pleat seam, CF (CB) to the fold of the first knife pleat, each side	±0.3	0	0	3.5	3.5	3.5	3.5	3.5	3.5
PF	Pleat face	Along the pleat seam, fold to fold of neighbouring pleats (4 pleats per front half and per back half)	±0.3	0.25	0.38	6.25	6.5	6.75	7	7.25	7.63
PD	Pleat depth	Fold to the inner (under) fold of one pleat, at the pleat seam; intake per pleat = 2 x PD	±0.3	0	0	3	3	3	3	3	3
PE	Pleat edge-stitch length	Fold edge-stitch, full length: pleat seam to the hem (leather holds no pressed pleat on its own)	±0.5	0.2	0.5	36.6	36.8	37	37.2	37.4	37.9

Code	Point of measure	Tol in	XS in	S in	M in	L in	XL in	2XL in
A	Back length from HPS	±0.39	26.77	27.17	27.56	27.95	28.35	28.94
B	1/2 chest	±0.59	23.62	24.41	25.20	25.98	26.77	27.95
C	1/2 hem sweep, pleats closed	±0.79	24.02	24.80	25.59	26.38	27.17	28.35
CC	Hem circumference, pleats closed	±1.18	48.03	49.61	51.18	52.76	54.33	56.69
SH	Shoulder width (dropped)	±0.39	21.65	22.24	22.83	23.43	24.02	24.80
F	Armhole depth from HPS	±0.39	10.24	10.63	11.02	11.42	11.81	12.28
SL	Sleeve length from shoulder point	±0.39	21.65	22.05	22.44	22.83	23.23	23.62
I	1/2 bicep	±0.39	8.43	8.74	9.06	9.37	9.69	10.08
CW	Cuff, closed, laid flat	±0.20	4.61	4.76	4.92	5.08	5.24	5.43
CH	Cuff height	±0.12	2.36	2.36	2.36	2.36	2.36	2.36
N2	Collar stand length at neck seam	±0.39	17.17	17.64	18.11	18.58	19.06	19.65
N	Collar stand height at CB	±0.08	1.38	1.38	1.38	1.38	1.38	1.38
NF	Collar height at CB	±0.12	1.97	1.97	1.97	1.97	1.97	1.97
NP	Collar point length	±0.20	2.95	2.95	2.95	2.95	2.95	3.07
PW	Front placket width	±0.08	1.38	1.38	1.38	1.38	1.38	1.38
S1	First placket snap below HPS	±0.20	5.28	5.39	5.51	5.63	5.75	5.87
SN	Placket snap spacing	±0.20	4.72	4.82	4.92	5.02	5.12	5.24
YK	Back yoke depth at CB	±0.20	4.80	4.96	5.12	5.28	5.43	5.63
PS	Pleat seam from HPS	±0.39	12.36	12.68	12.99	13.31	13.62	14.02
PL	Pleated panel length	±0.39	14.41	14.49	14.57	14.65	14.72	14.92
P0	First pleat fold from CF / CB	±0.12	1.38	1.38	1.38	1.38	1.38	1.38
PF	Pleat face	±0.12	2.46	2.56	2.66	2.76	2.85	3.00
PD	Pleat depth	±0.12	1.18	1.18	1.18	1.18	1.18	1.18
PE	Pleat edge-stitch length	±0.20	14.41	14.49	14.57	14.65	14.72	14.92

INSIDE VIEW · overshirt (size M) · unlined, seams finished clean

back seen from the inside (as from the front) · the two fronts opened out at the sides · wearer's LEFT = image right

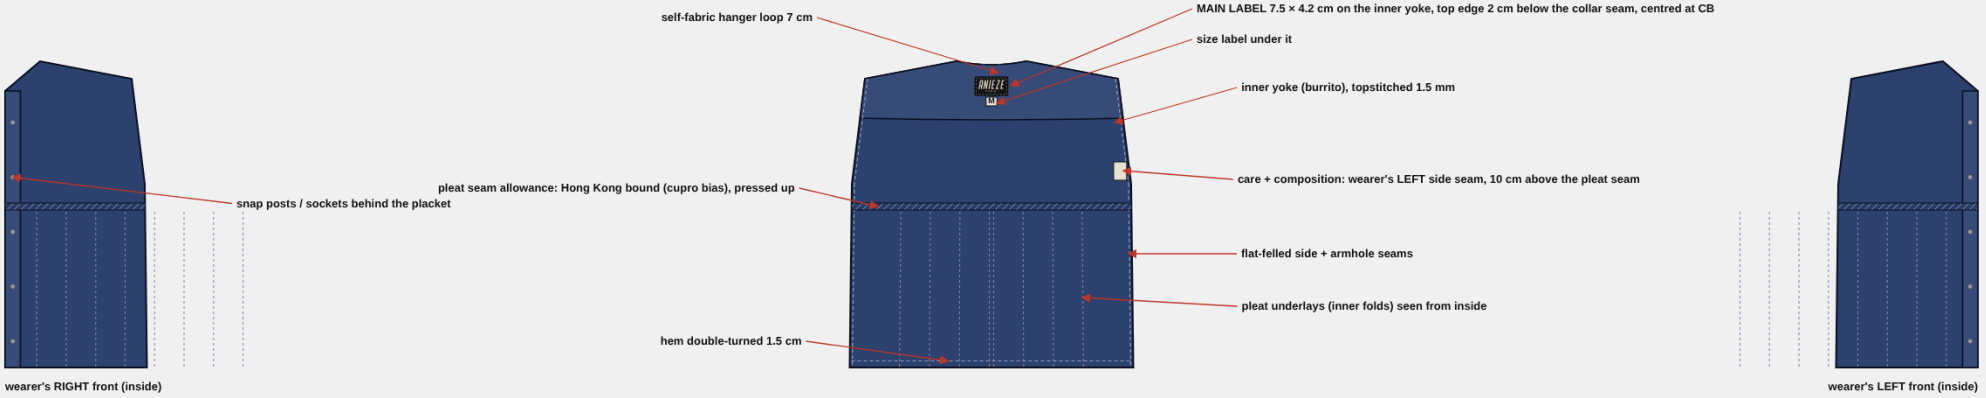


Item	Description	Weight / size	Colour	Qty (M)
Main leather	LAMBSKIN 0.7–0.8 mm, full grain, aniline or semi-aniline: NO heavy pigment finish or plastic top coat (the patina must soak in). Route A: undyed CRUST; Route B: drum-dyed deep INDIGO crust. Soft temper that folds without cracking; skins 5–8 sq ft; one dye lot per garment. Tannery strike-off with patina + top coat + flex test before bulk	0.7–0.8 mm · skins 5–8 sq ft	Crust (A) or deep indigo (B)	net ≈ 22.0 sq ft · BUY ≈ 6 skins ≈ 39 sq ft (M, skin plan)
Hand colour	ANIEZE hand-applied PATINA. Route A (recommended): undyed CRUST lambskin; paint the rust + caramel shapes with penetrating leather dyes (water- or alcohol-based, aniline type) by brush, sponge and airbrush in thin layers; mask the shapes; airbrush the indigo base around them, blending the feathered edges; fix, then seal with a thin flexible water-based top coat (matte or satin). Route B: indigo-dyed lambskin + thin airbrushed layers of opaque water-based leather pigment for the rust + caramel, sealed. NO thick paint: it cracks at the pleat folds. Recipes from the approved strike-offs	≈ 40–60 ml dye per overshirt (estimate)	Indigo base · rust + caramel	per overshirt
Top coat	Water-based flexible leather finish (acrylic / PU), matte or satin, sprayed thin; must pass rub (ISO 11640) and flex (ISO 5402-1) tests on the coloured leather	≈ 100 ml	Clear	per overshirt
Interfacing	Leather fusible (low temperature, ≤ 80 °C) or cold-bonding tape: collar + stand, cuffs, plackets, sleeve plackets, behind every snap. Test on coloured + coated leather: no shine, no ghosting			≈ 0.5 m
Half-lining	Bemberg cupro, upper body + sleeves (covers the leather seams); the pleated lower half stays unlined so the pleats swing		Indigo	≈ 1.2 m
Adhesive	Water-based leather adhesive, solvent-free, for allowances, hems and turned edges			as needed
Thread	Bonded polyester or nylon leather thread, Tex 40 construction / Tex 70 topstitch, leather-point needles; pleat edge-stitch in indigo, sewn AFTER colouring and top coat	Tex 40 / Tex 70	Indigo	≈ 600 m
Snaps	Ring-spring snap sets, cap + socket + stud + post, brass, NICKEL-FREE, leather-length posts, fusible patch behind each; see hardware	15 mm cap × 7, 12.5 mm × 1	Gunmetal, nickel-free (PVD or tin-cobalt)	8 sets + 2 spare
Main label	ANIEZE woven damask, indigo-black ground, stone thread, real logo vector + PARIS; on the cupro inner yoke at the inside back neck, centred, top edge 2 cm below the collar seam	7.5 × 4.2 cm	Black / stone	1
Size label	Woven, stone ground, black letter, under the main label	2.5 × 2 cm	Stone / black	1
Care + composition label	Printed satin, folded loop, in the lining at the wearer's LEFT side seam. Wording FR/EN (no symbols): LEATHER SPECIALIST CLEAN ONLY, hand-coloured, each piece unique	3 × 7 cm	Stone / black	1
Hanger loop	Lambskin strip, turned and stitched, 7 cm, under the collar at CB	7 cm	Indigo	1
Painting template	1:1 template per size (Mylar): shape outlines with the ±2 cm envelope, CF / CB, pleat seam, shirt-hem and knee lines, notch pin points; masking film for Route A	per size		1 set per size (tooling)

Edge / seam	Material	Finish
Front plackets	lambskin, 2 plies + leather fusible	separate full-length strips, edges turned and glued, edge-stitched 1.5 mm and topstitched 6 mm; run across the pleat seam
Collar + stand	lambskin + leather fusible	seamed, allowances skived, turned, edge-stitched 1.5 mm; stand topstitched 1.5 mm
Pleat seam	upper body over the pleated panel	allowances skived and graded, glued UP, topstitched 6 mm on the upper body; no binding
Pleat folds	lambskin	edge-stitched 1.5 mm from the fold along the full length; cool-pressed through paper (≤ 80 °C)
Pleated panel hem	lambskin	turned 2 cm, glued and topstitched BEFORE pleating; skived at every fold
Side, armhole, sleeve seams	lambskin	plain 1 cm, glued open, topstitched 3 mm each side; upper body + sleeves half-lined in cupro
Yoke	lambskin outer, cupro inner	lambskin outer yoke, cupro inner yoke, topstitched 1.5 mm
Skin joins in the pleated panel	lambskin	plain 1 cm, glued open, placed in the inner (under) fold of a pleat, where they never show
Cuffs	lambskin + leather fusible	two-piece cuff, edges turned and glued, edge-stitched 1.5 mm; 2 pleats into the cuff; tower placket 14 cm

FP01L OVERSHIRT · CUTTING / SKIN PLAN (estimate) · lambskin

Idealised packing of each piece's bounding box (size M) on average skins (92 × 66 cm usable core ≈ 6.5 sq ft). Grain = spine (↕). Real skins: cut around holes, belly and flanks; the factory marker rules.

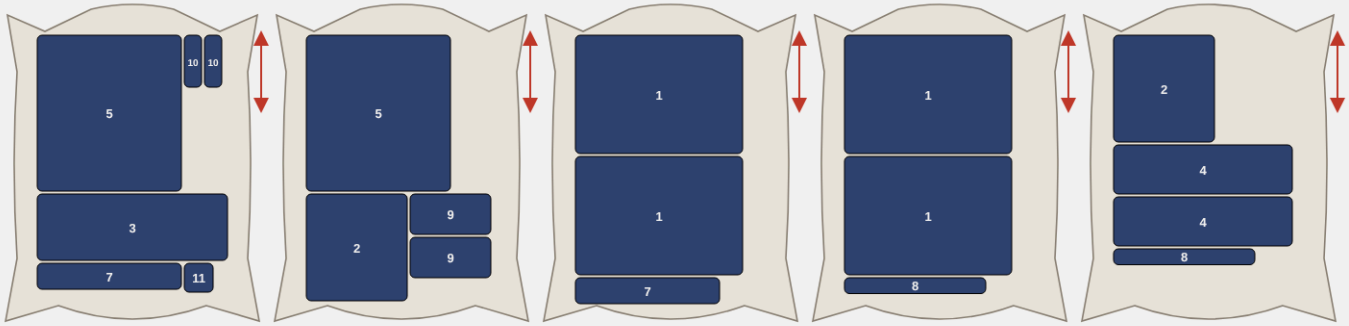


skin 1 · lambskin (crust)

skin 2 · lambskin (crust)

skin 3 · lambskin (crust)

skin 4 · lambskin (crust)

skin 5 · lambskin (crust)



skin 6 · lambskin (crust)

Pieces (size M)

1. 4 × Pleated panel quarter (4 pleats, CF / CB end + side end, h… · 58 × 41 · 10.2 sq ft
2. 2 × Upper front (HPS → pleat seam, dropped shoulder) · 35 × 37 · 2.8 sq ft
3. 1 × Back body (yoke → pleat seam), on the fold · 66 × 23 · 1.6 sq ft
4. 2 × Back yoke, outer + inner · 62 × 17 · 2.3 sq ft
5. 2 × Sleeve · 50 × 54 · 5.8 sq ft
6. 2 × Front placket strip (folded double) · 9 × 72 · 1.4 sq ft
7. 2 × Collar, upper + under · 50 × 9 · 1.0 sq ft
8. 2 × Collar stand, outer + inner · 49 × 5.5 · 0.6 sq ft
9. 2 × Cuff (folded: outer + inner in one) · 28 × 14 · 0.8 sq ft
10. 2 × Sleeve placket · 6 × 18 · 0.2 sq ft
11. 1 × Hanger loop + small parts · 10 × 10 · 0.1 sq ft

Net (bounding boxes × 0.8 for shape) ≈ 22.0 sq ft · + 30 % cutting loss = 29 sq ft · idealised packing: 6 skins

PLANNED BUY: 6 skins ≈ 39 sq ft (the higher of the two: big panels need a skin each)

Garment weight ≈ 1.25 kg at M (estimate)

Skins are 5–8 sq ft: real yield is lower than the idealised packing (holes, belly, flanks, shade matching).

One dye lot per garment; cut matching pairs (fronts, legs, sleeves) from neighbouring skins.


Check the skins on a light table before cutting; mark every flaw with silver pen on the flesh side.

Planned buy ≈ 6 skins ≈ 39 sq ft at M (net ≈ 22.0 sq ft). The pleated panel is cut ≈ 224 cm round in 4 quarters; skin joins go in a pleat under-fold. Choose the best, most even skins for the pleated quarters. Confirm with the factory marker on the real skins.

1. Leather: lambskin 0.7–0.8 mm, aniline / semi-aniline, soft temper, one dye lot per garment. Cut single-ply (hand or press knife), backbone vertical; pleated quarters from the best part of the skins.
2. Silhouette: unchanged from the wool version: boxy unisex overshirt, hip length (A 70 cm at M), dropped shoulders (SH 58), relaxed chest (ease ≈ 20 cm), point collar on a stand, long sleeves with snap cuffs, back yoke. No pockets (open question).
3. Knife pleats all round the lower half: 4 per front half and 4 per back half = 16 pleats. Face PF ≈ 6.75 cm, depth PD 3 cm (intake 6 cm per pleat, 96 cm in all at M, so the panel is cut ≈ 224 cm round before pleating). Every fold turns TOWARD THE NEAREST SIDE SEAM: on the wearer's LEFT of CF the folds face the wearer's left side seam, on the wearer's RIGHT of CF they face the right side seam; the same on the back, so CB reads as a flat 7 cm panel between two pleats turning away from it (an inverted box look). First fold P0 = 3.5 cm from CF / CB, last fold ≈ 1.5 cm before the side seam. LEATHER: every fold is edge-stitched (1.5 mm from the fold) along its FULL length (PE = PL); lambskin takes no permanent pressed pleat, the stitch keeps the fold crisp. PD < PF, so the underlays do not overlap: ≈ 1.9 layers under one point of the pleat seam at M (wool version: 5). Allowances skived, glued and topstitched, no binding.
4. Pleat seam: level all round at PS = 33 cm below HPS at M. Pleats folded, edge-stitched full length and cool-pressed through paper first; the panel joined to the upper body, allowances skived, glued UP, topstitched 6 mm. The front plackets lie over it.
5. Skin joins: a pleated quarter needs more length than one skin; joins are plain 1 cm, glued open and placed in the inner (under) fold of a pleat, where they never show.
6. THE COLOUR is ANIEZE hand-applied patina on the finished FRONT and BACK UNITS (upper body + pleated panel joined, yoke not on yet), pleats closed and CLIPPED, never tacked (needle holes stay in leather). Only the pleat faces take colour; the underlays stay base colour and flash when the folds open.
7. Colour route A (recommended): crust lambskin → rust + caramel shapes in penetrating dye → mask the shapes → airbrush the indigo base around them, blending the feathered edges → dry → thin flexible water-based top coat by spray → cure 24 h. Route B: indigo crust + thin opaque pigment layers by airbrush, sealed.
8. Front: separate full-length plackets PW 3.5 cm, wearer's LEFT over right; 6 snaps on the front: 1 on the collar stand (12.5 mm) + 5 on the placket (15 mm) at S1 + k·SN. Fusible patch behind every snap.
9. Back: lambskin outer yoke and cupro inner yoke to YK at CB; hanger loop under the collar. The back body below the yoke carries the colour, the yoke does not.
10. Collar: point collar on a stand, leather fusible, allowances skived, edge-stitched 1.5 mm. Stand snap 12.5 mm.
11. Sleeves: one-piece, set into the dropped armhole, seam glued and topstitched; 2 pleats into a 6 cm two-piece cuff, 14 cm tower placket; 1 snap per cuff (15 mm).
12. Seams: plain 1 cm, glued open, topstitched 3 mm each side; upper body and sleeves half-lined in cupro; the pleated lower half unlined so the pleats swing. Skive every allowance that folds or crosses another.
13. Hem: the pleated panel hem turned 2 cm, glued and topstitched before pleating, skived at every fold so it folds crisply.
14. Labels: main woven label (real ANIEZE logo vector, 7.5 × 4.2 cm) on the cupro inner yoke at CB, top edge 2 cm below the collar seam; size label under it; care + composition in the lining at the wearer's LEFT side seam.
15. Machinery: walking-foot or needle-feed lockstitch, leather-point needles, 3.5 mm stitch (topstitch 4 mm); skiving machine; roller or Teflon foot; snap press with the maker's dies. Test every seam and the snaps on coloured + coated leather first.
16. Care wording (FR/EN): AGNEAU / LAMBSKIN · DOUBLURE / LINING 100 % CUPRO · NETTOYAGE SPÉCIALISTE CUIR UNIQUEMENT / LEATHER SPECIALIST CLEAN ONLY · Ne pas laver, ne pas repasser directement, éviter l'eau et le soleil direct / Do not wash, do not iron directly, keep away from water and direct sun · Coloré à la main : chaque pièce est unique / Hand-coloured: each piece is unique.

FRONT


stone suede · 2 knife pleats per leg, edge-stitched 12 cm · knee join KJ · slant pockets · colour over the pleats

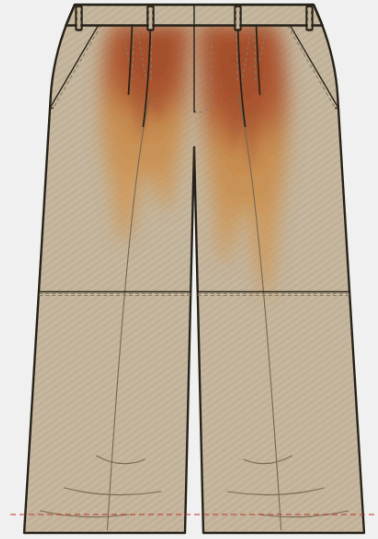

laid flat · dashed line = the floor when worn: the last ≈4 cm pools in folds

BACK


2 jetted pockets · darts · knee join KJ · colour on the back thighs, ≥ 5 cm below the jets

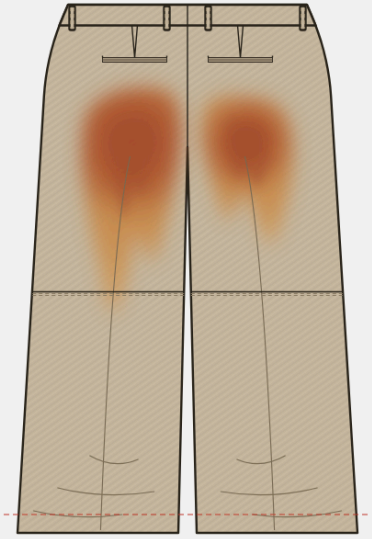

laid flat · dashed line = the floor when worn: the last ≈4 cm pools in folds

LEFT SIDE (as worn)


high rise · wide straight leg · hem pooling on the floor, nothing tied

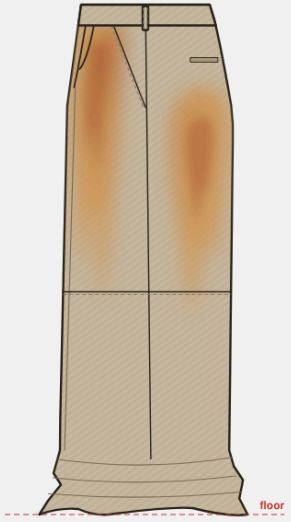

Stone = suede · rust / caramel = airbrushed suede dye continuing from the overshirt (see the paint map) · thin line = soft crease · double line at KJ = lapped knee join · dashed = pleat underlay / topstitch

A · FRONT PLEATS + SLANT POCKET

Wearer's left front at M · 2 deep knife pleats toward the side seam · colour over the pleats

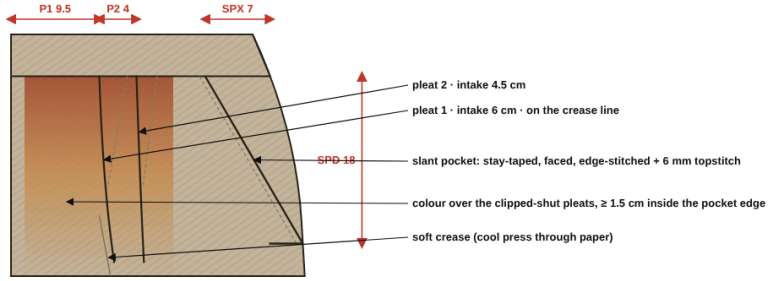


Folds toward the side seam, edge-stitched 12 cm below the waistband seam, then free. Waistband, loops and pocket parts stay plain stone.

B · PLEATS + CREASE IN SUEDE

Edge-stitched pleats, soft crease · to be validated on the proto

stone lamb suede 0.6–0.7 mm | woven fusible | pocketing | cupro lining

① knife pleat section at the waistband seam (schematic)



② sequence (to be validated on proto panels)


1. Cut, mark the pleat and crease lines (chalk on the flesh side, never on the nap).
2. Fold the 2 pleats, clip them in the allowance (no pins in the field).
3. Colour: suede dye airbrushed over the closed pleats, fixed, nap brushed, repellent.
4. Edge-stitch each fold 1.5 mm for 12 cm below the waistband seam, walking foot.
5. Soft crease: cool iron (≤ 80 °C) through brown paper, never steam on suede.

Suede holds no sharp permanent crease: the edge-stitch holds the pleats, the crease stays soft.

C · WAISTBAND + FLY

4.5 cm finished · hook + bar + inside button · metal zip #5

stone lamb suede 0.6–0.7 mm | woven fusible | pocketing | cupro lining

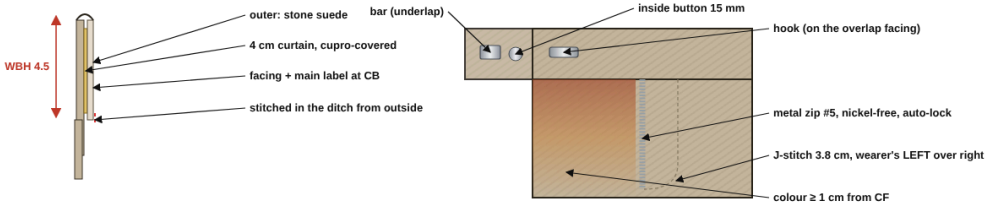


4.5 cm waistband split at CB (alteration), hook + bar + inside button on the 4 cm underlap; 6 belt loops. Waistband never coloured (attached after colouring).

D · BACK JETTED POCKET

2 jets × 5 mm · dart · bag in pocketing

stone lamb suede 0.6–0.7 mm | woven fusible | pocketing | cupro lining

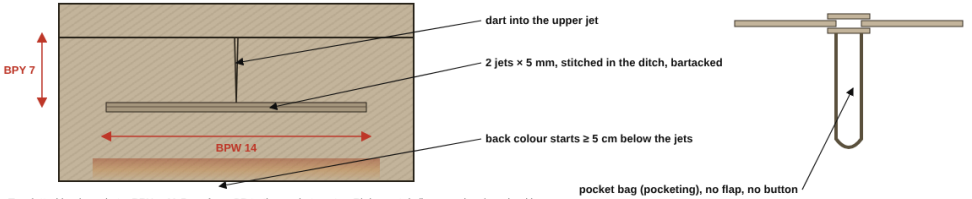


Two jetted back pockets, BPX = 11.5 cm from CB to the pocket centre. Plain, no tab (house rule: clean back).

E · LINING + SEAMS

Cupro, front + back, to the knee · glued + topstitched seams · knee join KJ

stone lamb suede 0.6–0.7 mm | woven fusible | pocketing | cupro lining

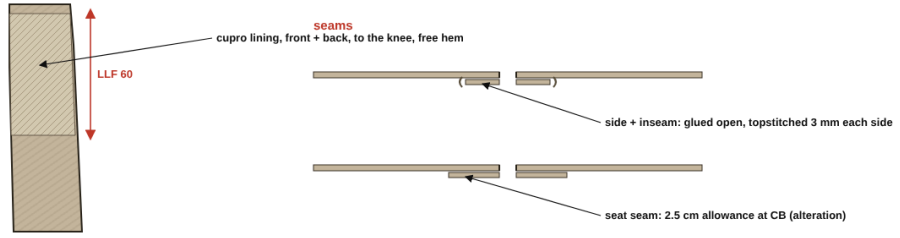


Front AND back lined. The lining is joined at the waistband seam, round the fly and into the side seams; free hem at the knee; never coloured.

F · HEM + POOLING


Turned 4 cm, blind-stitched · heel tape · ≈ 4 cm pooling

stone lamb suede 0.6–0.7 mm | woven fusible | pocketing | cupro lining

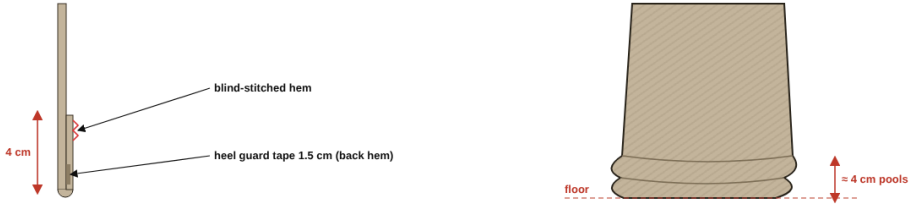


Pooling is in the length (inseam 84 at M). No turn-up, nothing tied at the leg. The soft crease fades into the pooled folds; hem turned 3 cm and glued.

FRONT · points of measure (M)

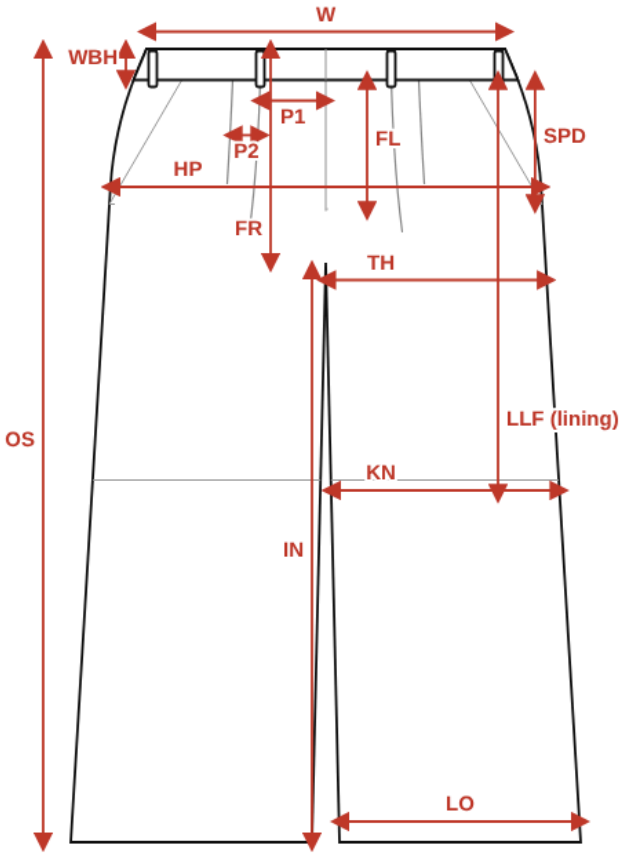

BACK

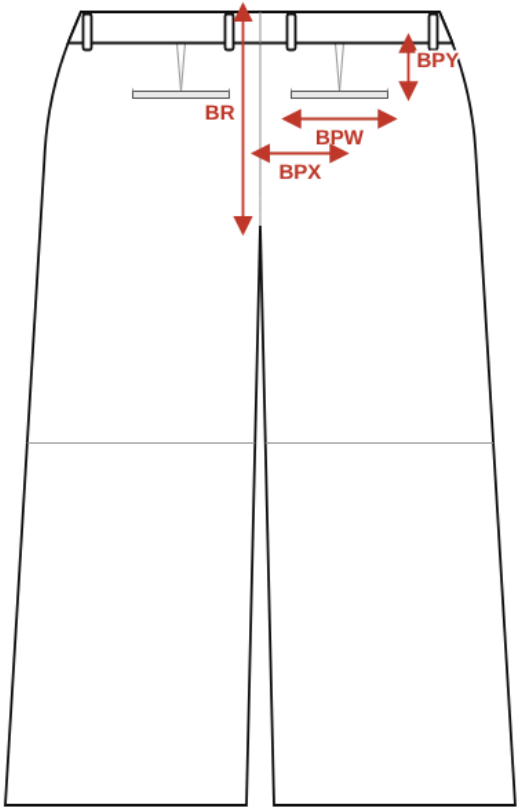

Inseam 84 cm at M (174 cm, worn to the floor): body crotch height ≈ 80 cm; a wide high-rise trouser hangs its crotch ≈ 2 cm below the body crotch, leaving ≈ 78 cm to the floor barefoot; + ≈ 2 cm shoe sole = 80 cm in shoes; + ≈ 4 cm of pooled excess folding on the floor = 84 cm. Graded +1 cm per size with the crotch height, so every size pools the same ≈ 4 cm (house rule: wide, high-rise, pooling, nothing tied at the leg).


Code	Point of measure	How to measure	Tol	Grade	XL→2XL	XS	S	M	L	XL	2XL
W	1/2 waist, relaxed	Top edge of the waistband, closed (hook + bar and inside button done up), laid flat, edge to edge	±1	2	3	48	50	52	54	56	59
WBH	Waistband height, finished	Top edge to the waistband seam, at CF and CB	±0.2	0	0	4.5	4.5	4.5	4.5	4.5	4.5
HP	1/2 hip	Laid flat, pleats closed, side to side 20 cm below the top of the waistband (+0.5 cm per size)	±1.5	2	2.5	58.5	60.5	62.5	64.5	66.5	69
TH	1/2 thigh	One leg laid flat, 2.5 cm below the crotch point, perpendicular to the crease, fold to fold	±1	1.2	1.5	37.6	38.8	40	41.2	42.4	43.9
KN	1/2 knee	One leg laid flat, 33 cm below the crotch point measured along the inseam, fold to fold	±1	0.8	1	35.4	36.2	37	37.8	38.6	39.6
LO	1/2 leg opening	One leg laid flat, straight across the hem edge	±1	0.6	0.8	33.8	34.4	35	35.6	36.2	37
LOC	Hem circumference (leg opening, full)	One leg, all the way round the hem edge (= 2 × LO)	±1.5	1.2	1.6	67.6	68.8	70	71.2	72.4	74
FR	Front rise incl. waistband	Top of the waistband at CF, along the crotch seam curve to the crotch point (zip closed)	±0.7	0.7	1	32.6	33.3	34	34.7	35.4	36.4
BR	Back rise incl. waistband	Top of the waistband at CB, along the seat seam curve to the crotch point	±0.7	1	1.3	42	43	44	45	46	47.3
IN	Inseam	Crotch point straight down the inside leg seam to the hem edge	±1	1	1	82	83	84	85	86	87
OS	Outseam incl. waistband	Top of the waistband at the side seam, along the side seam to the hem edge	±1.5	1.6	2	112.8	114.4	116	117.6	119.2	121.2
P1	Pleat 1 position from CF	Along the waistband seam, CF to the fold of pleat 1 (on the crease line)	±0.3	0.4	0.5	8.7	9.1	9.5	9.9	10.3	10.8
P2	Pleat spacing	Along the waistband seam, fold of pleat 1 to fold of pleat 2	±0.3	0.1	0.2	3.8	3.9	4	4.1	4.2	4.4
PD1	Pleat 1 intake	Total cloth taken in by pleat 1 at the waistband seam (fold depth x 2)	±0.3	0	0	6	6	6	6	6	6
PD2	Pleat 2 intake	Total cloth taken in by pleat 2 at the waistband seam (fold depth x 2)	±0.3	0	0	4.5	4.5	4.5	4.5	4.5	4.5
SPX	Slant pocket, top from side seam	Along the waistband seam, side seam to the top corner of the pocket edge	±0.3	0.2	0.3	6.6	6.8	7	7.2	7.4	7.7
SPD	Slant pocket depth at side seam	Waistband seam straight down the side seam to the lower bartack of the pocket opening	±0.5	0.3	0.5	17.4	17.7	18	18.3	18.6	19.1
BPY	Back pocket below the waistband seam	Waistband seam straight down to the top edge of the upper jet	±0.3	0.2	0.3	6.6	6.8	7	7.2	7.4	7.7
BPW	Back pocket opening width	Jet end to jet end (bartack to bartack)	±0.3	0.3	0.5	13.4	13.7	14	14.3	14.6	15.1
BPX	Back pocket centre from CB seam	Along the waistband seam, CB seam to the centre of the pocket opening	±0.3	0.5	0.6	10.5	11	11.5	12	12.5	13.1
FL	Fly opening length	Waistband seam to the J-stitch bartack at CF	±0.5	0.5	0.5	18	18.5	19	19.5	20	20.5
LLF	Lining length (front + back)	Waistband seam straight down, parallel to the crease, to the lining hem edge (ends at the knee)	±1	1	1	58	59	60	61	62	63
KJ	Leg panel join below the waistband seam	Waistband seam straight down the side seam to the horizontal skin-join seam above the knee (suede skins are too short for one-piece legs)	±1	1	1	56	57	58	59	60	61
BL	Belt loop length, finished	Waistband seam to the top fold of the loop	±0.2	0	0	5.5	5.5	5.5	5.5	5.5	5.5

Fit check (cm)	Target	XS	S	M	L	XL	2XL
Waist ease (2W − body waist)	1.5–3.5	2.2	2.2	2.2	2.2	2.2	2.2
Hip ease (2HP − body hip)	16–20	18.1	18.1	18.1	18.1	18.1	18.1
Pooling (IN − body crotch height)	2–6	4.0	4.0	4.0	4.0	4.0	4.0
Outseam − inseam	29–35	30.8	31.4	32.0	32.6	33.2	34.2
Back rise − front rise	8–12	9.4	9.7	10.0	10.3	10.6	10.9

Code	Point of measure	Tol in	XS in	S in	M in	L in	XL in	2XL in
W	1/2 waist, relaxed	±0.39	18.90	19.69	20.47	21.26	22.05	23.23
WBH	Waistband height, finished	±0.08	1.77	1.77	1.77	1.77	1.77	1.77
HP	1/2 hip	±0.59	23.03	23.82	24.61	25.39	26.18	27.17
TH	1/2 thigh	±0.39	14.80	15.28	15.75	16.22	16.69	17.28
KN	1/2 knee	±0.39	13.94	14.25	14.57	14.88	15.20	15.59
LO	1/2 leg opening	±0.39	13.31	13.54	13.78	14.02	14.25	14.57
LOC	Hem circumference (leg opening, full)	±0.59	26.61	27.09	27.56	28.03	28.50	29.13
FR	Front rise incl. waistband	±0.28	12.83	13.11	13.39	13.66	13.94	14.33
BR	Back rise incl. waistband	±0.28	16.54	16.93	17.32	17.72	18.11	18.62
IN	Inseam	±0.39	32.28	32.68	33.07	33.46	33.86	34.25
OS	Outseam incl. waistband	±0.59	44.41	45.04	45.67	46.30	46.93	47.72
P1	Pleat 1 position from CF	±0.12	3.43	3.58	3.74	3.90	4.06	4.25
P2	Pleat spacing	±0.12	1.50	1.54	1.57	1.61	1.65	1.73
PD1	Pleat 1 intake	±0.12	2.36	2.36	2.36	2.36	2.36	2.36
PD2	Pleat 2 intake	±0.12	1.77	1.77	1.77	1.77	1.77	1.77
SPX	Slant pocket, top from side seam	±0.12	2.60	2.68	2.76	2.83	2.91	3.03
SPD	Slant pocket depth at side seam	±0.20	6.85	6.97	7.09	7.20	7.32	7.52
BPY	Back pocket below the waistband seam	±0.12	2.60	2.68	2.76	2.83	2.91	3.03
BPW	Back pocket opening width	±0.12	5.28	5.39	5.51	5.63	5.75	5.94
BPX	Back pocket centre from CB seam	±0.12	4.13	4.33	4.53	4.72	4.92	5.16
FL	Fly opening length	±0.20	7.09	7.28	7.48	7.68	7.87	8.07
LLF	Lining length (front + back)	±0.39	22.83	23.23	23.62	24.02	24.41	24.80
KJ	Leg panel join below the waistband seam	±0.39	22.05	22.44	22.83	23.23	23.62	24.02
BL	Belt loop length, finished	±0.08	2.17	2.17	2.17	2.17	2.17	2.17

INSIDE VIEW · trouser (size M) · front half and back half seen from the inside

cut open at the side seams, seen as from the front: the wearer's LEFT is on the image right · lining and labels go on after painting + steaming

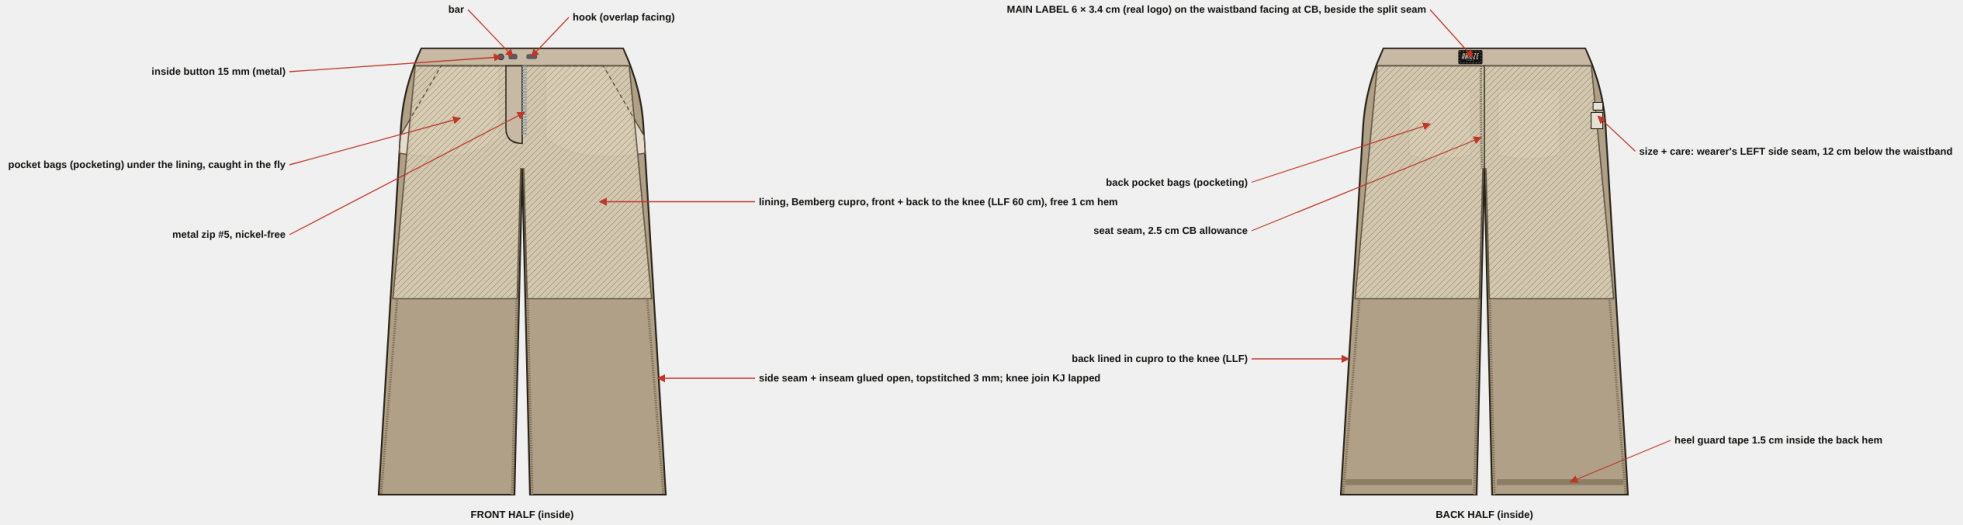



Item	Description	Weight / size	Colour	Qty (M)
Main leather	LAMB SUEDE, 0.6–0.7 mm (thin + very soft, founder Rev B), fine short velvety nap, chrome-tanned, DRUM-DYED THROUGH in warm STONE (scuffs show the same colour, not a pale core); soft drape; skins 5–8 sq ft; one dye lot per pair; nap direction the same on every panel. NOT goat, NOT split cow suede (firmer, heavier). Tannery strike-off with the colour route + rub test before bulk	0.6–0.7 mm · skins 5–8 sq ft	Warm stone	net ≈ 23.9 sq ft · BUY ≈ 8 skins ≈ 52 sq ft (M, skin plan)
Hand colour	Hand colour on suede: penetrating SUEDE dye (alcohol- or water-based) in rust + caramel, AIRBRUSHED in thin passes so it soaks into the nap and gives the feathered edges; no acrylic paint, no top coat (it would flatten the nap). Fix per the dye maker, brush the nap, then a fluorine-free water and stain repellent. Shade-matched to the overshirt patina on the same day with the same mixes	≈ 40–60 ml dye per pair (estimate)	Rust + caramel	per pair
Water + stain repellent	Fluorine-free (PFAS-free) suede protector, sprayed after colouring and brushing; must not change the shade		Clear	per pair
Lining	Bemberg cupro twill, front + back, waistband seam to the knee (LLF), free hem: keeps the suede off the skin and stops colour transfer onto the legs	≈ 75–85 g/m², 140 cm	Stone	≈ 1.4 m (M)
Pocketing	Cotton-cupro pocketing twill: slant pocket bags, back pocket bags, waistband facing backing	≈ 110 g/m², 145 cm	Stone	≈ 0.5 m (M)
Interfacing	Leather fusible (low temperature) or cold-bonding tape: waistband curtain, fly facing + shield, pocket edges, jet boxes			≈ 0.4 m
Adhesive	Water-based leather adhesive, solvent-free: allowances, hems, turned edges			as needed
Stay tape + hem guard	10 mm cotton stay tape on the slant pocket edges; 1.5 cm hem guard tape inside the back hem	10 / 15 mm	Stone	≈ 0.6 m + 0.8 m
Thread	Bonded polyester or nylon leather thread, Tex 40 construction / Tex 70 topstitch, leather-point needles; stone	Tex 40 / Tex 70	Stone	≈ 500 m
Zip, fly	Metal zip #5, closed end, auto-lock slider, nickel-free brass teeth; tape stone; plain puller (no logo)	18 cm (XS–S 17, M–L 18, XL–2XL 19)	Gunmetal, nickel-free (PVD or tin-cobalt)	1
Hook and bar	Flat trouser hook + bar, brass, nickel-free, 4 prongs each, backed with fusible	≈ 25 mm hook	Gunmetal, nickel-free (PVD or tin-cobalt)	1 set
Inside button	Flat 4-hole button, brass, nickel-free, on the underlap extension	15 mm	Gunmetal, nickel-free (PVD or tin-cobalt)	1 + 1 spare
Main label	The ANIEZE woven label (real logo vector + PARIS), scaled to fit the 4.5 cm waistband: on the waistband facing at CB, sewn 4 sides	6 × 3.4 cm	Black / stone	1
Size label	Woven, stone ground, black letter, in the lining at the wearer's LEFT side seam above the care label	2.5 × 2 cm	Stone / black	1
Care + composition label	Printed satin, folded loop, in the lining at the wearer's LEFT side seam. Wording FR/EN (no symbols): LEATHER SPECIALIST CLEAN ONLY, hand-coloured, each piece unique	3 × 7 cm	Stone / black	1

Edge / seam	Material	Finish
Side seams + inseam	suede	plain 1 cm, glued open and hammered flat; topstitched 3 mm each side
Leg panel join (KJ)	suede	lapped 1 cm, glued, double topstitch 3 mm + 6 mm; same line on all four panels so it reads as a design seam
Seat seam	suede	2.5 cm allowance at CB, glued open, double-stitched
Slant pocket edges	suede + stay tape	stay-taped, edge turned and glued, edge-stitched 1.5 mm + topstitched 6 mm
Back pocket jets	suede	2 jets × 5 mm, skived, glued, stitched in the ditch, bartacked
Waistband	suede + woven curtain	suede outer, cupro-covered curtain facing, top edge turned and glued; split at CB
Hem	suede	turned 3 cm, glued (no stitching visible), hidden hem guard tape inside the back hem where it pools
Lining	cupro	front + back to the knee, joined at the waistband seam, fly and side seams; free 1 cm double-turned hem
Pleats	suede	edge-stitched 1.5 mm from the fold for 12 cm below the waistband seam, then free

FP02L TROUSER · CUTTING / SKIN PLAN (estimate) · stone suede

Idealised packing of each piece's bounding box (size M) on average skins (92 × 66 cm usable core ≈ 6.5 sq ft). Grain = spine (↕). Real skins: cut around holes, belly and flanks; the factory marker rules.

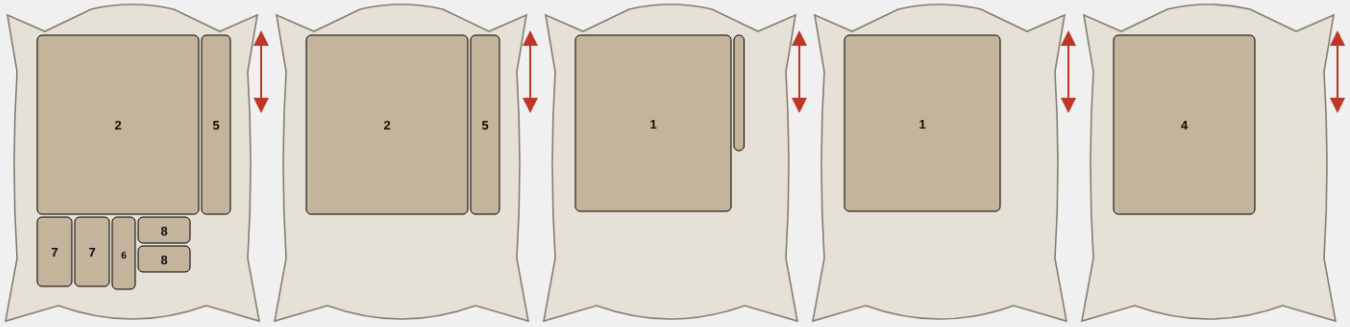

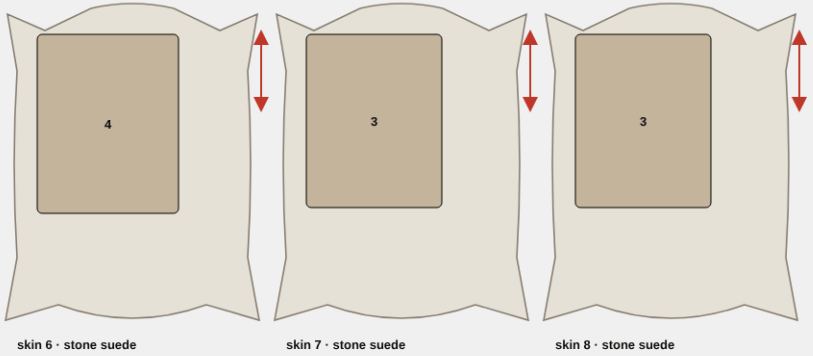

Pieces (size M)

1. 2 × Back leg, upper panel (waistband seam to KJ, CB allowance … · 54 × 61 · 7.1 sq ft
2. 2 × Back leg, lower panel (KJ to hem, hem 3 cm glued) · 56 × 62 · 7.5 sq ft
3. 2 × Front leg, upper panel (2 pleats, fly facing on the wearer… · 47 × 60 · 6.1 sq ft
4. 2 × Front leg, lower panel (KJ to hem, hem 3 cm glued) · 49 × 62 · 6.5 sq ft
5. 2 × Waistband outer + facing (split at CB) · 10 × 62 · 1.3 sq ft
6. 1 × Fly shield (right) · 8 × 25 · 0.2 sq ft
7. 2 × Slant pocket facing · 12 × 24 · 0.6 sq ft
8. 2 × Back pocket jets + facings · 18 × 9 · 0.3 sq ft
9. 1 × Belt loop strip · 3.5 × 40 · 0.2 sq ft

Net (bounding boxes × 0.8 for shape) ≈ 23.9 sq ft · + 30 % cutting loss = 31 sq ft · idealised packing: 8 skins

PLANNED BUY: 8 skins ≈ 52 sq ft (the higher of the two: big panels need a skin each)

Garment weight ≈ 1.18 kg at M (estimate)

Skins are 5–8 sq ft: real yield is lower than the idealised packing (holes, belly, flanks, shade matching).

One dye lot per garment; cut matching pairs (fronts, legs, sleeves) from neighbouring skins.

Check the skins on a light table before cutting; mark every flaw with silver pen on the flesh side.

Planned buy ≈ 8 skins ≈ 52 sq ft at M (net ≈ 23.9 sq ft). Each very wide leg panel (½ opening 35 cm) needs most of a skin, which is why the legs are split at the knee join KJ. If the tannery has large skins (8–9 sq ft), ask for a nested marker: the count may drop to ≈ 6.

1. Leather: lamb suede 0.6–0.7 mm (thin + soft), drum-dyed through in warm stone, one dye lot per pair, nap running DOWN on every panel. Cut single-ply, crease on the backbone line where possible.
2. Fit: unchanged from the wool version: very wide, high rise, unisex (house rule: wide, high-rise, pooling on the floor, nothing tied at the leg). Inseam 84 cm at M (174 cm, worn to the floor): body crotch height ≈ 80 cm; a wide high-rise trouser hangs its crotch ≈ 2 cm below the body crotch, leaving ≈ 78 cm to the floor barefoot; + ≈ 2 cm shoe sole = 80 cm in shoes; + ≈ 4 cm of pooled excess folding on the floor = 84 cm. Graded +1 cm per size with the crotch height, so every size pools the same ≈ 4 cm (house rule: wide, high-rise, pooling, nothing tied at the leg).
3. Leg panels: suede skins are too short for one-piece legs, so each leg is an upper and a lower panel joined at KJ = 58 cm below the waistband seam (above the knee), lapped, glued and double topstitched: one level line all round that reads as a design seam.
4. Front: two deep knife pleats per leg at the waistband seam, folds toward the SIDE seam (P1 on the crease line, intake 6 cm; P2 4 cm further out, intake 4.5 cm), edge-stitched for 12 cm, then free. Pleats + crease in suede: suede holds no permanent pressed pleat or crease. The two front knife pleats are edge-stitched 1.5 mm from the fold for the first 12 cm below the waistband seam, then fall free; the crease is a soft press (cool iron through paper), not a sharp set. The nap is brushed after colouring.
5. THE COLOUR: rust + caramel suede dye, airbrushed in thin passes over the closed (clipped) pleats of the front legs from the waistband seam, fading out between mid-thigh and the knee, and on the back thighs; nap brushed after drying; then the repellent.
6. The legs are coloured on the registration template together with the overshirt's units, the same day and with the same mixes, so the composition continues from the shirt's pleats onto the trouser. Waistband, loops, fly shield and pocket facings stay plain.
7. Slant front pockets: opening from SPX at the waistband seam to SPD down the side seam; stay-taped, edge turned and glued, edge-stitched + topstitched 6 mm; cotton-cupro bags.
8. Fly: metal #5 zip, wearer's LEFT over right, J-stitch 3.8 cm. Waistband: 4.5 cm, suede outer, cupro-covered curtain facing, split at CB; hook + bar + inside button.
9. Belt loops: 6, suede, edges turned and glued, edge-stitched, caught in the waistband seam and bartacked.
10. Back: one dart per side into the jet; two jetted pockets (2 × 5 mm jets), no flap or button. The back colour starts ≥ 5 cm below the jets.
11. Lining: Bemberg cupro, front and back, waistband seam to the knee (LLF), free hem. It keeps the suede off the skin and protects the legs from any colour transfer.
12. Hem: turned 3 cm and glued (no visible stitch), hidden hem guard tape inside the back; the hem pools ≈ 4 cm on the floor in soft folds, no turn-up.
13. Labels: main woven label (real ANIEZE logo vector, 6 × 3.4 cm) on the waistband facing at CB; size + care in the lining at the wearer's LEFT side seam.
14. Machinery: walking-foot or needle-feed lockstitch, leather-point needles, 3.5 mm stitch; skiving machine; Teflon or roller foot (suede marks easily); bartack; no steam press on suede.
15. Care wording (FR/EN): Daim d'agneau / Lamb suede · Doublure / Lining : 100 % cupro · NETTOYAGE SPÉCIALISTE CUIR UNIQUEMENT / LEATHER SPECIALIST CLEAN ONLY · Brosser le daim, éviter l'eau et le soleil direct / Brush the suede, keep away from water and direct sun · Coloré à la main : chaque pièce est unique / Hand-coloured: each piece is unique.

A · MAIN LABEL (overshirt inside back neck · trouser waistband)





trouser: 6 × 3.4 cm (fits the 4.5 cm band)

Woven damask, black ground, stone thread · ANIEZE wordmark from the master vector · PARIS at 22 % of the logo height · margin 0.45 cm

Overshirt: inner yoke, centred at CB, top edge 2 cm below the collar seam · Trouser: waistband facing at CB, sewn 4 sides · added AFTER colouring + top coat

B · SIZE LABEL



Woven, stone ground, black letter, 2.5 × 2 cm · overshirt: under the main label · trouser: left side seam above the care label

C · CARE + COMPOSITION (wording FR / EN, no symbols)



overshirt: LEFT side seam,
10 cm above the pleat seam



trouser: LEFT side seam,
12 cm below the waistband

Printed satin 3 × 7 cm (drawn 1.6×), folded loop.

LEATHER SPECIALIST CLEAN ONLY + hand-coloured / each piece unique, FR +

No ISO 3758 symbols needed (founder); wording to be checked by GINETEX France or a lawyer before bulk.


Labels are polyester: sewn on after colouring (never sprayed).

D · LOGO MASTER



Use only this vector
(Drive: Logo black.svg)
No outlines, no effects,
no redrawn letters

E · WHERE THE BRANDING SITS



Overshirt: inner yoke, main label centred at CB,
top edge 2 cm below the collar seam; size label under it.

Hanger loop: lambskin strip, 7 cm, under the collar.

Care + composition: LEFT side seams (both pieces).




trouser waistband facing, CB (split seam)

Trouser: main label 6 × 3.4 cm on the
waistband facing at CB, beside the split seam.

Logo from the ANIEZE master vector only (brand/anieze_logo_black.svg), never typed. Overshirt main label 7.5 × 4.2 cm on the inner yoke, 2 cm below the collar seam, centred at CB; trouser 6 × 3.4 cm on the waistband facing at CB. Care in words FR/EN: LEATHER SPECIALIST CLEAN ONLY · hand-coloured, each piece unique.

A · RING-SPRING SNAP (overshirt)


8 sets: stand 1 × 12.5 mm, placket 5 + cuffs 2 × 15 mm · brass, nickel-free · drawn at 7 × scale

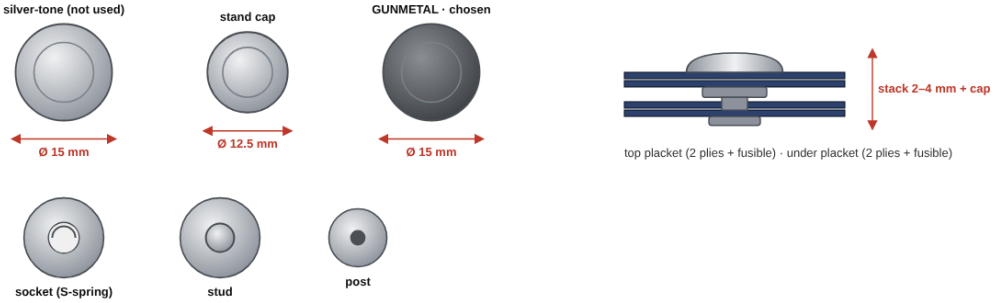

- Cap + socket on the top (wearer's LEFT) placket, stud + post on the under placket; cuff: cap on the overlap. Fusible patch behind each.
- Set with the maker's die AFTER colouring, top coat and sewing (never sprayed). Open / close 15–30 N, pull-off ≥ 90 N on the real stack.
- Plain cap face (no logo deboss) unless the founder asks; a logo would use the real ANIEZE vector only.

B · FLY ZIP (trouser)


Metal #5, brass teeth, nickel-free, closed end, auto-lock slider, stone tape

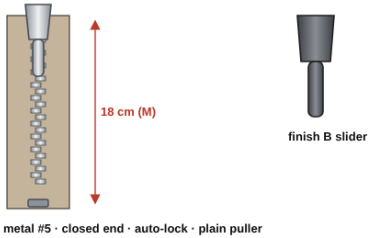

- Length by size: XS–S 17 cm, M–L 18 cm, XL–2XL 19 cm (fly opening FL − 1).
- Wearer's LEFT over right, J-stitch 3.8 cm. EN 16732 zip strength.
- Tape colour stone; teeth + slider in the SAME finish as the snaps.
- Sewn in after colouring (the zip is never sprayed).

C · HOOK + BAR, INSIDE BUTTON (trouser)

Flat trouser hook + bar, brass, nickel-free · 15 mm flat 4-hole button, brass

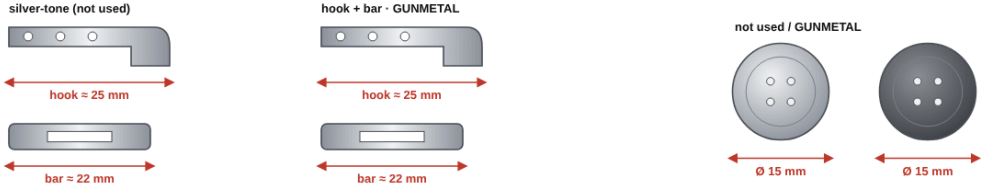

- Hook on the overlap facing (wearer's left), bar on the underlap; 4 prongs each through the waistband + curtain, washer plates inside.
- Inside button on the 4 cm underlap extension, buttonhole in the overlap facing; sewn with a thread shank. Pull ≥ 90 N.
- Same finish lot as the overshirt snaps (one lot per set).

D · FINISHES + TESTS

All metal, brass, NICKEL-FREE · one finish lot per set (shirt + trouser)

A · silver-tone: NOT USED
PVD, or tin-based plating (e.g. white bronze). NOT nickel plating.

B · nickel-free GUNMETAL: CHOSEN
PVD or tin-cobalt. Not black nickel.

- EN 1811 nickel release AFTER EN 12472 wear simulation, for EACH finish.
- REACH Annex XVII: Pb < 0.05 % (63) · Cd < 0.01 % (23) · Ni < 0.5 µg/cm²/week (27).
- ISO 9227 neutral salt spray 24 h, no red rust.
- One leather-specialist clean cycle on a hardware card: no finish loss.
- Pull tests ≥ 90 N on the real leather + fusible stack, 5 of each at proto.
- Hardware never goes through the spray booth or the top coat (set after).
- Approve one hardware card per finish before bulk.

Item	Specification	Size	Finish	Qty	Where	Checks
Snap, front + cuffs	Ring-spring (S-spring) snap: cap + socket on the top layer, stud + post below, brass, set with the maker's die through 2–3 plies of lambskin + fusible	cap Ø 15 mm, post for 2–4 mm stack	GUNMETAL, nickel-free (PVD or tin-cobalt; NOT black nickel)	7	5 placket (S1 + k·SN), 1 per cuff	Pull-off ≥ 90 N; open / close force 15–30 N; EN 1811 after EN 12472
Snap, collar stand	Same snap, smaller cap	cap Ø 12.5 mm	Gunmetal as above	1	Collar stand, centred on the stand height	Pull-off ≥ 70 N; EN 1811
Fly zip	Metal #5 closed-end, auto-lock slider, nickel-free brass teeth, tape stone	17 / 18 / 19 cm	Gunmetal, nickel-free (PVD or tin-cobalt)	1	CF fly, wearer's LEFT over right, J-stitch 3.8 cm	EN 16732 zip strength; EN 1811 nickel release
Hook and bar	Flat trouser hook (on the overlap facing) + bar (on the underlap), brass, nickel-free	25 mm	Gunmetal, nickel-free (PVD or tin-cobalt)	1 set	Waistband at CF	Pull ≥ 90 N; EN 1811
Inside button	Flat 4-hole button, brass, nickel-free, sewn with a thread shank	15 mm	Gunmetal, nickel-free (PVD or tin-cobalt)	1	Underlap extension, buttoning into the overlap facing	Pull ≥ 90 N; EN 1811

All hardware METAL, brass, one finish lot per set (shirt + trouser): GUNMETAL, nickel-free (PVD or tin-cobalt; NOT black nickel), chosen by the founder 12 Nov 2026. EN 1811 nickel release tested AFTER EN 12472 wear/corrosion simulation for EACH finish; REACH Annex XVII: Pb < 0.05 % (entry 63), Cd < 0.01 % (entry 23), Ni release < 0.5 µg/cm²/week (entry 27); 24 h neutral salt spray (ISO 9227). Hardware goes on AFTER colouring, once the top coat has cured. Pull tests on the real lambskin + fusible stack, 5 of each at proto. Leather-cleaning resistance: one specialist leather clean on a hardware card, no finish loss.